


REVISIONS			
LTR		DATE	APPROVED
A	INITIAL RELEASE	4/30/03	

SPECIFICATIONS:

NOMINAL FREQUENCY: 49.152 MHz
 MODE OF OSCILLATION: FUNDAMENTAL
 FREQUENCY TOLERANCE AT 25°C: ±100 PPM MAX
 FREQUENCY STABILITY OVER
 TEMPERATURE RANGE: ±100 PPM MAX
 OPERATING TEMPERATURE RANGE: -10°C TO +60°C
 STORAGE TEMPERATURE RANGE: -40°C TO +85°C
 AGING: ±5 PPM PER YEAR MAX
 LOAD CAPACITANCE: 20 pF
 DRIVE LEVEL: 4 μW TYP, 100 μW MAX
 SHUNT CAPACITANCE: 7 pF MAX
 EQUIVALENT SERIES RESISTANCE: 150 OHMS MAX

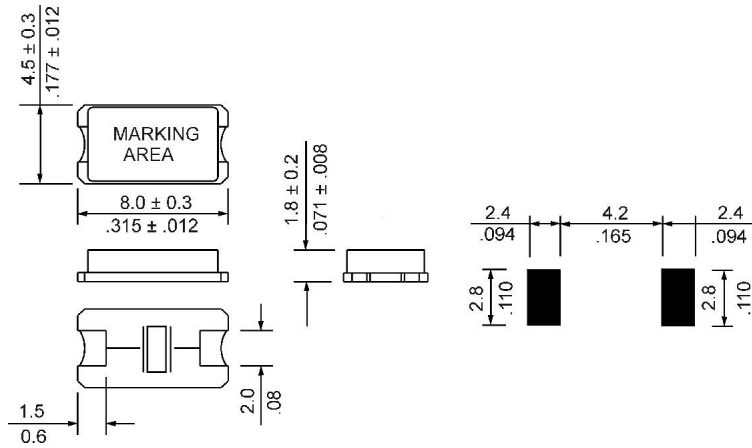

RALTRON

10651 NW 19TH STREET
MIAMI, FL 33172

ALL DIMENSIONS ARE IN mm/inch
UNLESS OTHERWISE SPECIFIED

DRAWN BY: Part Generator

CHECKED BY:

APPROVED BY:

SCALE: SHEET 1 OF DATE:

CAGE CODE:



DRAWING TITLE:

**SURFACE MOUNT
MICROPROCESSOR CRYSTAL**

DRAWING NUMBER:

H180A-49.152-20