


MICRO ELECTRONICS

MBB31TA-EJ

**ULTRA HIGH
BRIGHTNESS
BLUE LED LAMP**

DESCRIPTION

MBB31TA-EJ is an ultra high brightness BLUE LED lamp with 465~470 nm dominant wavelength encapsulated in a 3.2mm diameter clear transparent lens .

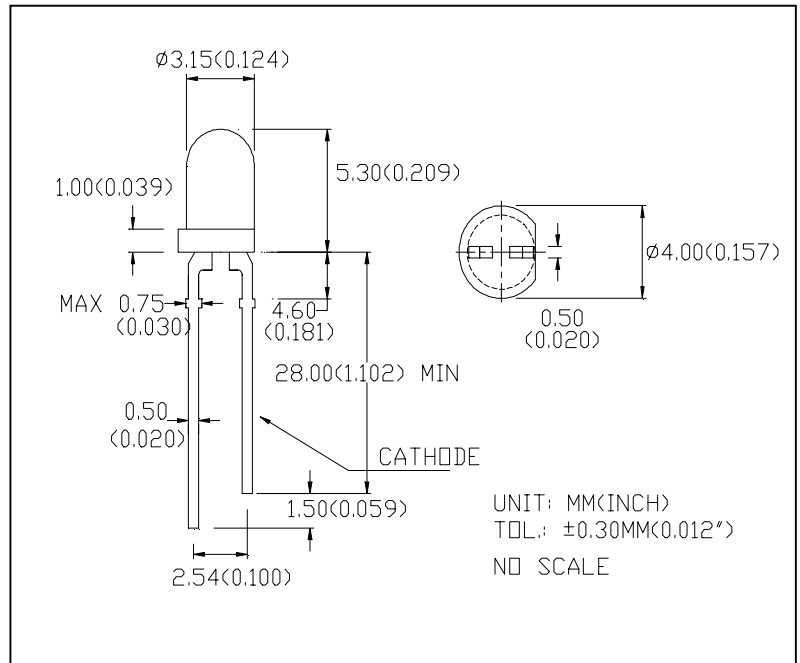

ABSOLUTE MAXIMUM RATINGS

Power Dissipation @ Ta=25°C	125mW
Forward Current, DC (IF)	30mA
Reverse Voltage	5V
Operating Temperature Range	-20 to +80°C
Storage Temperature Range	-30 to +100°C
Lead Soldering Temperature (1/16" from body)	260°C for 5 sec.

ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	CONDITIONS
Forward Voltage	VF		3.5	4.5	V	IF=20mA
Reverse Breakdown Voltage	BVR	5			V	IR=100µA
Luminous Intensity	IV	1000	1800		mcd	IF=20mA
Dominant Wavelength	λd	465	468	470	nm	IF=20mA
Spectral Line Half Width	Δλ		30		nm	IF=20mA
Viewing Angle	2θ 1/2		40		degree	IF=20mA

CAUTION

REV : B

Static electricity and surge damages the LED ,It is recommended to use a wrist band or anti-eletrostatic glove when handling the LED . All devices,equipment and machinery must be properly grounded.



MICRO ELECTRONICS LTD.
38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.
Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343 0181-5

28/07/03