

0.4 Inch (10.2mm) 4 Digit CLOCK STICK DISPLAY

AllInGaP Red (630nm) MSQC4H11C

AllInGaP Red (642nm) MSQC4R11C

AllInGaP Yellow MSQC4Y11C

PACKAGE DIMENSIONS	FEATURES
	<ul style="list-style-type: none"> Bright Bold Segments Common Anode/Cathode Low Power Consumption Low Current Capability Neutral Segments Grey Face Epoxy Encapsulated PCB High Performance High Reliability
NOTES:	APPLICATIONS
<ul style="list-style-type: none"> Dimensions are in inches (mm) Tolerances are +/- 0.010 (0.25) unless otherwise stated. 	<ul style="list-style-type: none"> Appliances Automotive Instrumentation Process Control

MODELS AVAILABLE

Part Number	Colour	Description	Special
MSQC4H11C	AllInGaP 630nm Clock, RHDP, Common Anode		Low Current Capability
MSQC4R11C	AllInGaP 642nm Clock, RHDP, Common Anode		Low Current Capability
MSQC4Y11C	AllInGaP Yellow Clock, RHDP, Common Anode		Low Current Capability

(For other colour options, contact your local area Sales Manager)



0.4 Inch (10.2mm) 4 Digit CLOCK STICK DISPLAY

ABSOLUTE MAXIMUM RATINGS ⁽¹⁾ ($T_A = 25^\circ\text{C}$, unless otherwise specified)				
Part Number	MSQC4H11C	MSQC4R11C	MSQC4Y11C	Units
Continuous Forward Current (each segment)	25	25	25	mA
Peak Forward Current ($F = 10\text{KHz}$, D/F = 1/10)	100	100	100	mA
Power Dissipation (P_D)	60	60	60	mW
*Derate Linearly from 25°C	0.36	0.36	0.36	mW
Reverse Voltage per Die	5 Volts			
Operating and Storage Temperature Range	-40°C to $+85^\circ\text{C}$			
Lead soldering time (1/16 inch from standoffs)	5 seconds @ 230°C			

ELECTRO-OPTICAL CHARACTERISTICS ⁽¹⁾ ($T_A = 25^\circ\text{C}$, unless otherwise specified)					
Part Number	MSQC4H11C	MSQC4R11C	MSQC4Y11C	Units	Test Condition
Luminous intensity⁽²⁾ (I_v)					
Minimum (Standard Current)	6000	4000	8000	ucd	$I_F = 10\text{mA}$
Typical (Standard Current)	7800	5800	12800	ucd	$I_F = 10\text{mA}$
Minimum (Low Current)	510	510	510	ucd	$I_F = 2\text{mA}$
Typical (Low Current)	1000	1000	1000	ucd	$I_F = 2\text{mA}$
Forward Voltage (V_F)					
Typical (Standard Current)	2.05	2.05	2.05	Volts	$I_F = 10\text{mA}$
Maximum (Standard Current)	2.40	2.40	2.40	Volts	$I_F = 10\text{mA}$
Typical (Low Current)	1.80	1.80	1.80	Volts	$I_F = 2\text{mA}$
Maximum (Low Current)	2.20	2.20	2.20	Volts	$I_F = 2\text{mA}$
Peak Wavelength	632	639	591	nm	$I_F = 10\text{mA}$
Dominant Wavelength	624	631	585	nm	$I_F = 10\text{mA}$
Spectral Line 1/2 Width	20	20	20	nm	$I_F = 10\text{mA}$
Reverse B⁽³⁾.Voltage (V_R)	5	5	5	Volts	$I_R = 100\mu\text{A}$

NOTES:

(1) Data per individual LED element



(2) Luminous intensity (ucd) = average light output per segment

(3) B = breakdown





0.4 Inch (10.2mm) 4 Digit CLOCK STICK DISPLAY

PIN ORIENTATION, SEGMENT IDENTIFICATION, AND PRODUCT MARKING

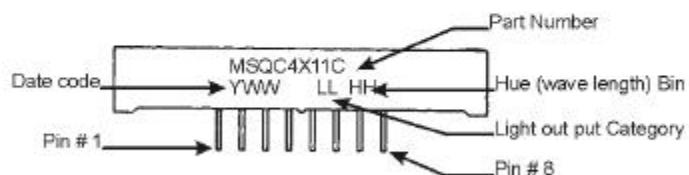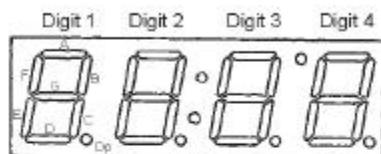


SCHEMATICS

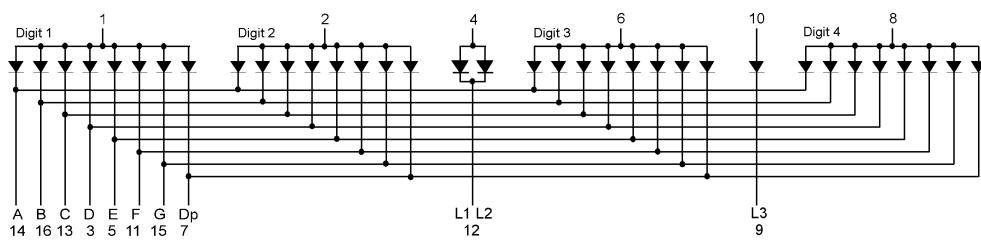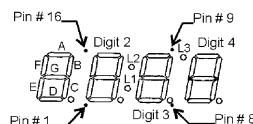


0.4 Inch (10.2mm) 4 Digit CLOCK STICK DISPLAY


GRAPHICAL DATA AllInGaP 630nm ($T_A = 25^\circ\text{C}$, unless otherwise specified)

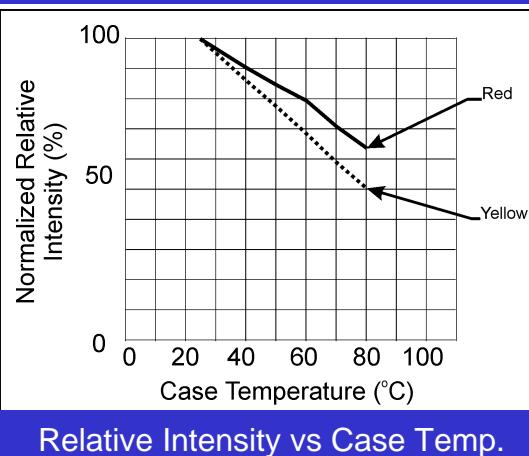


Relative Intensity vs Case Temp.

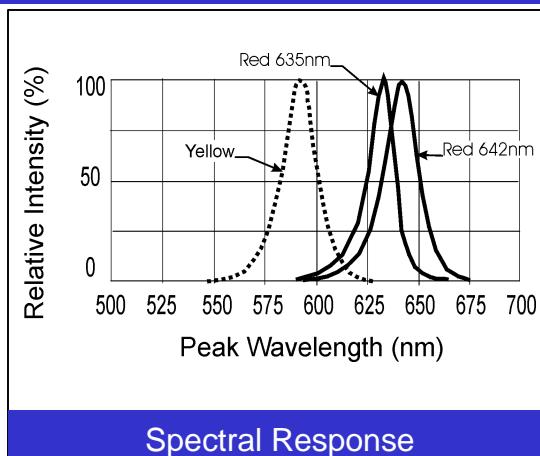


Spectral Response

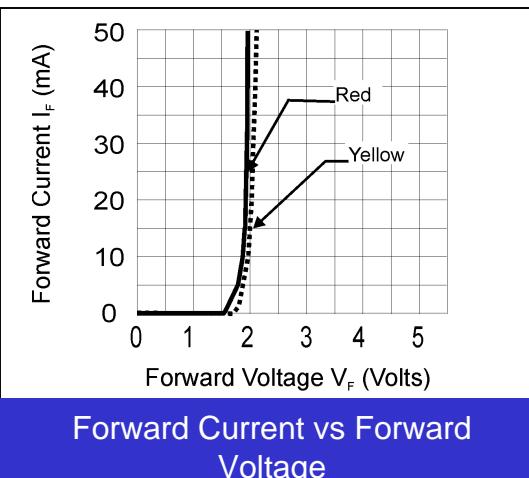


Forward Current vs Forward Voltage

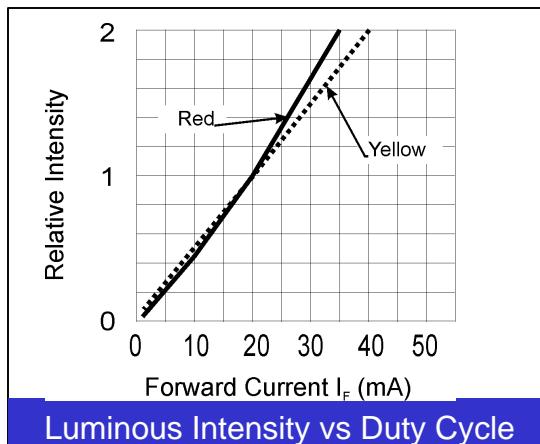

Luminous Intensity vs Duty Cycle

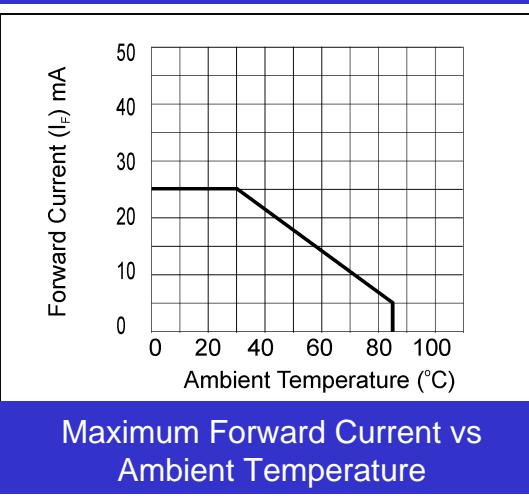

Maximum Forward Current vs Ambient Temperature

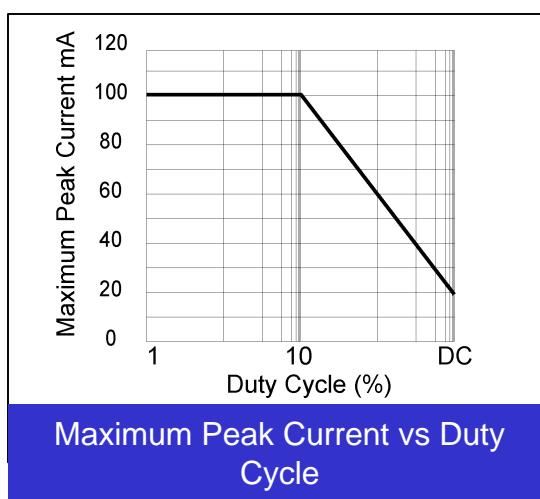

Maximum Peak Current vs Duty Cycle