


P6 SMBJ 150...P6 SMBJ 180CA

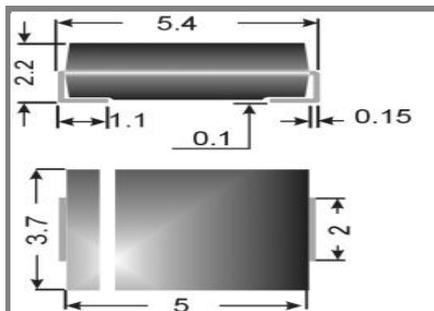

Surface mount diode

Unidirectional and bidirectional Transient Voltage Suppressor diodes

P6 SMBJ 150...P6 SMBJ 180CA

Pulse Power Dissipation: 600 W

Maximum Stand-off voltage: 150 ... 180 V

Features

- Max. solder temperature: 260°C
- Plastic material has UL classification 94V-0
- For bidirectional types (suffix "C" or "CA") electrical characteristics apply in both directions
- The standard tolerance of the breakdown voltage for each type is $\pm 10\%$. Suffix "A" denotes a tolerance of $\pm 5\%$ for the breakdown voltage.

Mechanical Data

- Plastic case SMB / DO-214AA
- Weight approx.: 0,1 g
- Terminals: plated terminals solderable per MIL-STD-750
- Mounting position: any
- Standard packaging: 3000 pieces per reel


1) Non-repetitive current pulse see curve $I_{PPM} = f(t_r)$

2) Mounted on P.C. board with 50 mm² copper pads at each terminal

3) Unidirectional diodes only

| Absolute Maximum Ratings | | $T_c = 25^\circ\text{C}$, unless otherwise specified | |
|--------------------------|---|---|------------------|
| Symbol | Conditions | Values | Units |
| P_{PPM} | Peak pulse power dissipation 10/1000 μs waveform ¹⁾ $T_a = 25^\circ\text{C}$ | 600 | W |
| $P_{M(AV)}$ | Steady state power dissipation ²⁾ , $T_a = 25^\circ\text{C}$ | 5 | W |
| I_{FSM} | Peak forward surge current, 60 Hz half sine-wave ³⁾ $T_a = 25^\circ\text{C}$ | 100 | A |
| R_{thA} | Max. thermal resistance junction to ambient ²⁾ | 60 | K/W |
| R_{thT} | Max. thermal resistance junction to terminal | 15 | K/W |
| T_j | Operating junction temperature | - 50 ... + 150 | $^\circ\text{C}$ |
| T_s | Storage temperature | - 50 ... + 150 | $^\circ\text{C}$ |
| V_f | Max. instant. forw. voltage $I_f = 25\text{ A}$ ³⁾ | <3,0 | V |
| | | - | V |

| Type | Characteristics | | Breakdown voltage@ I_T | | Test current I_T mA | Max. clamping voltage@ I_{PPM} | |
|--------------|---|------------------------|--------------------------|-----------|--------------------------|----------------------------------|----------------|
| | Max stand-off voltage@ I_D V_{WM} V | I_D μA | min. V | max. V | | V_C V | I_{PPM} A |
| P6 SMBJ 150 | 150 | 5 | 167 | 204 | 1 | 268 | 2,2 |
| P6 SMBJ 150A | 150 | 5 | 167 | 185 | 1 | 243 | 2,5 |
| P6 SMBJ 160 | 160 | 5 | 178 | 217 | 1 | 287 | 2,1 |
| P6 SMBJ 160A | 160 | 5 | 178 | 198 | 1 | 259 | 2,3 |
| P6 SMBJ 170 | 170 | 5 | 189 | 231 | 1 | 304 | 2 |
| P6 SMBJ 170A | 170 | 5 | 189 | 210 | 1 | 275 | 2,2 |
| P6 SMBJ 180 | 180 | 5 | 209 | 255 | 1 | 344 | 1,7 |
| P6 SMBJ 180A | 180 | 5 | 209 | 231 | 1 | 328 | 2 |

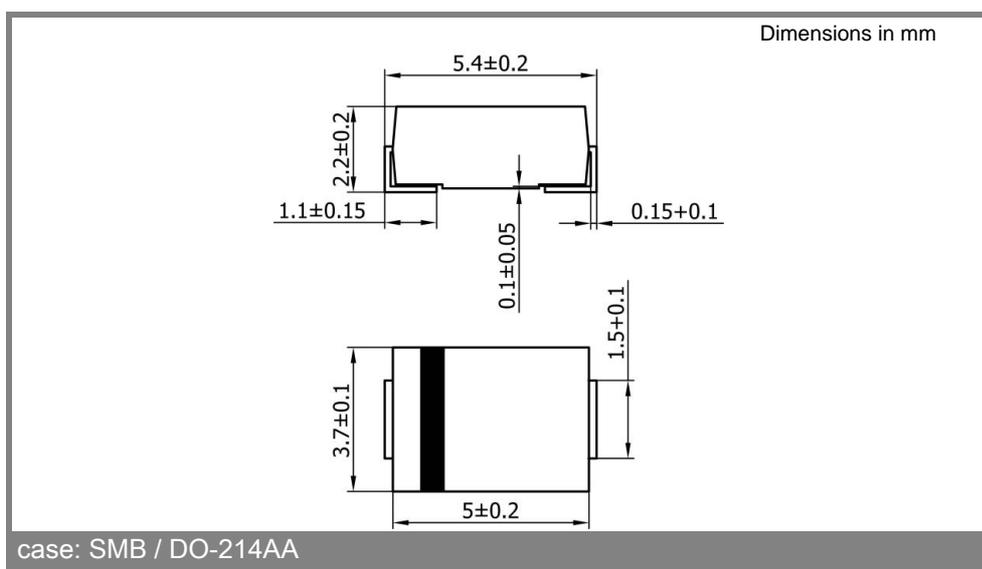

P6 SMBJ 150...P6 SMBJ 180CA

