

MSS SERIES
PS10GG-XXXXE2:1H10 1KV ISOLATED 2 W REGULATED SINGLE OUTPUT SIP12
Available Inputs:
12 and 24 VDC Wide Input 2:1
Available Outputs:
5, 9, 12 and 15 VDC

Other specifications please enquire.

Electrical Specifications

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

Input Specifications

Voltage range 9-18 VDC (12 VDC), 18-36 VDC (24 VDC)

Filter PI Filter

Isolation Specifications

Rated voltage 1000 VDC

 Resistance 10⁹ Ohm

Output Specifications

Voltage accuracy +/- 2 %, max.

Ripple and noise (at 20 MHz BW) 100 mV p-p, max.

Short circuit protection Continuous automatic restart

Line voltage regulation +/- 0.5 % max.

Load voltage regulation +/- 0.5 % max.

Temperature coefficient +/- 0,03 % / °C

General Specifications

Efficiency 70 %

Switching frequency 75 KHz, typ.

Environmental Specifications

Operating temperature (ambient) - 25° C to + 71° C

Storage temperature - 55 °C to + 125 °C

Derating See graph

Humidity Up to 90 %, non condensing

Cooling Free air convection

Physical Characteristics

Dimensions 31.80 x 14.50 x 8.60 mm

1.25 x 0,57 x 0,34 inches


Weight 6.6 g

Case material Non conductive black plastic


Examples of Partnumbers

PART NO.	INPUT VOLTAGE (VDC)	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
PS10GG-1205E2:1H10	9-18	20	231	5	400	72
PS10GG-1209E2:1H10	9-18	20	225	9	222	74
PS10GG-1212E2:1H10	9-18	20	213	12	168	78
PS10GG-1215E2:1H10	9-18	20	213	15	133	78
PS10GG-2405E2:1H10	18-36	12	112	5	400	74
PS10GG-2409E2:1H10	18-36	13	111	9	222	75
PS10GG-2412E2:1H10	18-36	11	107	12	168	78
PS10GG-2415E2:1H10	18-36	11	107	15	133	78

Dimensions

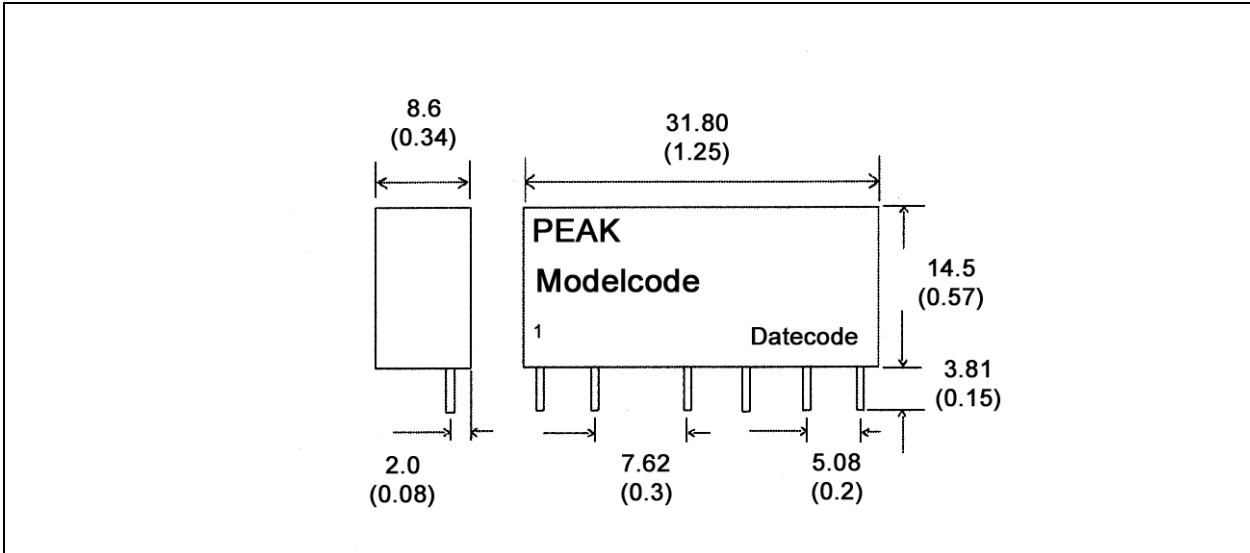

Derating Graph and Pinning

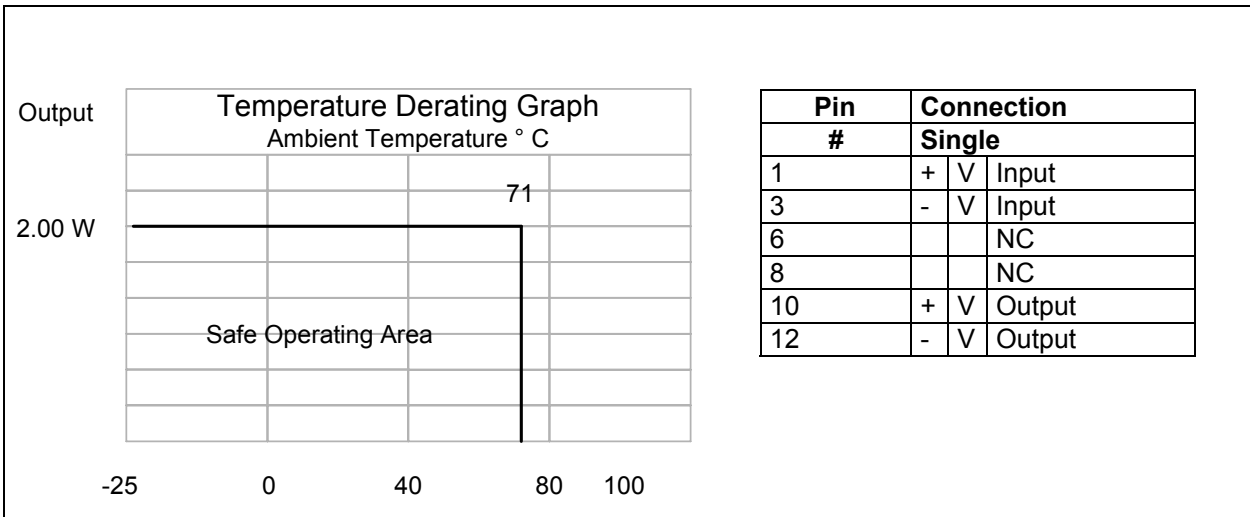

Specification can be changed without notice.

Copyright PEAK electronics GmbH