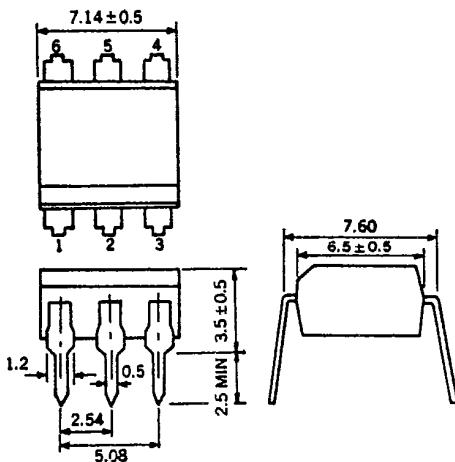


PHOTO COUPLER

PS2041

HIGH SPEED 6PIN PHOTO COUPLER


PACKAGE DIMENSIONS
(Unit: mm)
**FEATURES**

- High Speed Response 0.3 μ s TYP.
- High Isolation Voltage 2500 V_{r.m.s.}
- Compact, Dual In-Line Package

APPLICATIONS

1. Interface circuit for various instrumentations, control equipments.
2. Computer and peripheral manufactures.
3. TV sets.

(PS2041)



1. Anode
2. Cathode
3. NC
4. Emitter
5. VO
6. VCC

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)**Diode**

Forward Current	I_F	25	mA
Reverse Voltage	V_R	5	V
Power Dissipation	P_D	45	mW

Detector

Supply Voltage	V_{CC}	-0.5 to 15	V
Output Voltage	V_O	-0.5 to 15	V
Output Current	I_O	8	mA
Power Dissipation	P_C	100	mW
Isolation Voltage*	BV	2500	V _{r.m.s.}
Storage Temperature	T_{stg}	-55 to +125	°C
Operating Temperature	T_{opt}	-55 to +100	°C
Lead Temperature (10 s)		260	°C

* Condition

AC Voltage for 1 minute at $T_a = 25^\circ\text{C}$, RH = 60 %
between input (pin No. 1, 2, 3, Common) and output (pin No. 4, 5, 6)

PS2041

T-41-83

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC		SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Diode	Forward Voltage	V_F		1.7	2.2	V	$I_F = 16 \text{ mA}$
	Reverse Current	I_R		0.01	10	μA	$V_R = 5 \text{ V}$
	Forward Voltage Temperature Coefficient	$\frac{\Delta V_F}{\Delta T}$		-1.6		mV°C	$I_F = 16 \text{ mA}$
	Capacitance	C_t		60		pF	$V = 0, f = 1 \text{ MHz}$
Detector	High Level Output Current	$I_{OH}(1)$		3	500	nA	$I_F = 0 \text{ mA}, V_{CC} = V_O = 5.5 \text{ V}$
	High Level Output Current	$I_{OH}(2)$			100	μA	$I_F = 0 \text{ mA}, V_{CC} = V_O = 15 \text{ V}$
	Current Transfer Ratio	CTR *	15	22		%	$I_F = 16 \text{ mA}, V_{CC} = 4.5 \text{ V}, V_O = 0.4 \text{ V}$
	Low Level Output Voltage	V_{OL}		0.1	0.4	V	$I_F = 16 \text{ mA}, V_{CC} = 4.5 \text{ V}, I_O = 2.4 \text{ mA}$
Coupled	Low Level Supply Current	I_{CCL}		50		μA	$I_F = 16 \text{ mA}, V_O = \text{Open}, V_{CC} = 15 \text{ V}$
	High Level Supply Current	I_{CCH}		0.01	1	μA	$I_F = 0 \text{ mA}, V_O = \text{Open}, V_{CC} = 15 \text{ V}$
	Isolation Resistance	R_{1-2}	10^{11}			Ω	$V_{in-out} = 1 \text{ kV}_{\text{DC}}$
	Isolation Capacitance	C_{1-2}		0.7		pF	$V = 0, f = 1 \text{ MHz}$
Propagation Delay Time to Low Output Level		t_{PHL}^{**}		0.3	0.8	μs	$I_F = 16 \text{ mA}, V_{CC} = 5 \text{ V}, R_L = 1.9 \text{ k}\Omega$
Propagation Delay Time to High Output Level		t_{PLH}^{**}	(K/L/R) 0.3/1.0/0.8	(K/L/R) 0.8/1.5/1.25		μs	$I_F = 16 \text{ mA}, V_{CC} = 5 \text{ V}, R_L = 1.9 \text{ k}\Omega$

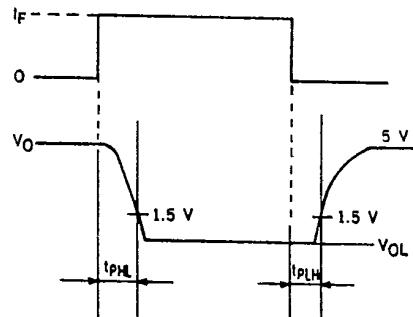
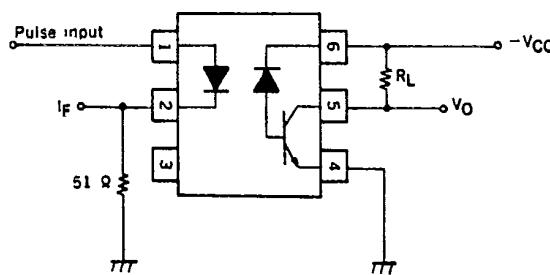
* CTR rank

K: 15 % ~







L: 25 % ~

R: 20 % ~

** Measuring circuit



T-41-83

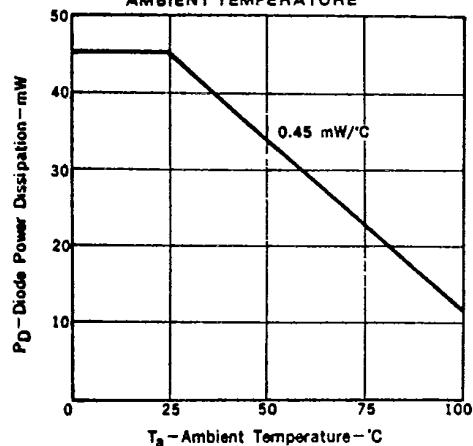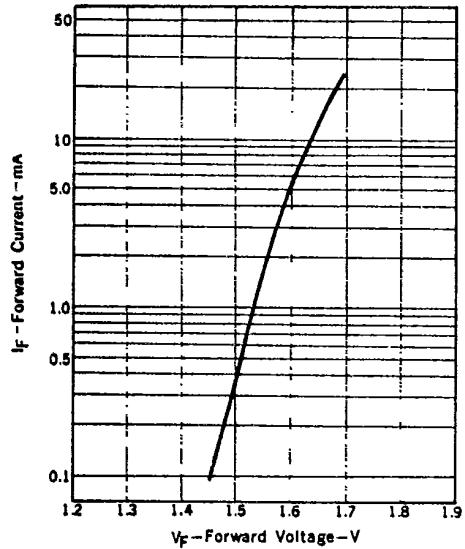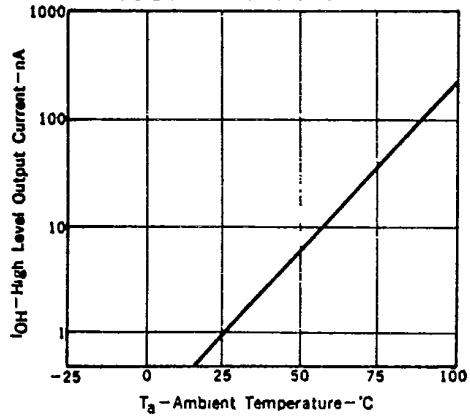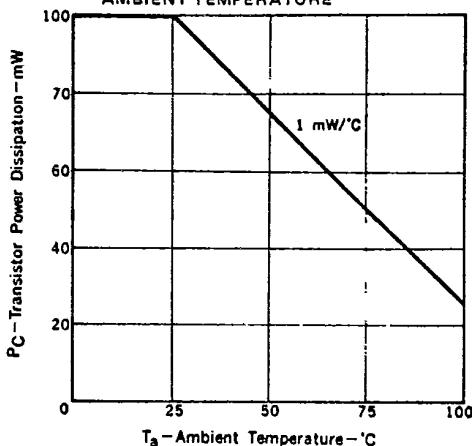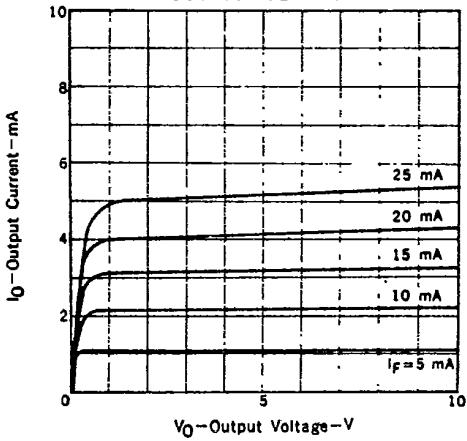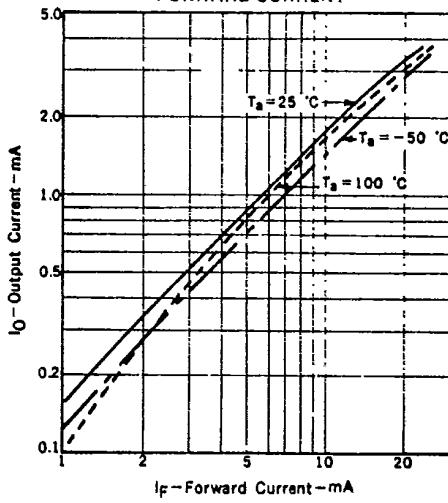TYPICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)DIODE POWER DISSIPATION vs.
AMBIENT TEMPERATUREFORWARD CURRENT vs.
FORWARD VOLTAGEHIGH LEVEL OUTPUT CURRENT vs.
AMBIENT TEMPERATURETRANSISTOR POWER DISSIPATION vs.
AMBIENT TEMPERATUREOUTPUT CURRENT vs.
OUTPUT VOLTAGEOUTPUT CURRENT vs.
FORWARD CURRENT

PS2041

T-41-83

