


## Silicon Piezoresistive Pressure Sensor

KPY 62-RK  
KPY 66-RK

### Features


- Low pressure and temperature hysteresis
- Fast response
- High sensitivity and linearity
- Fatigue free monocrystalline silicon diaphragm giving high load cycle stability
- High long term stability
- Built in silicon temperature sensor
- Metal housing

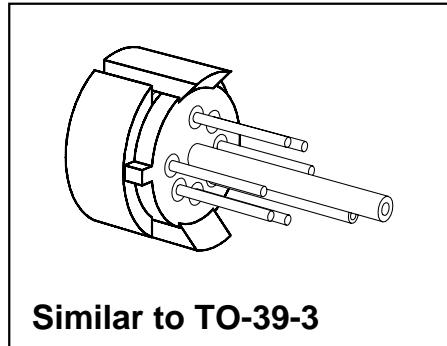

Type and Marking	Symbol	Pressure Range	Unit	Ordering Code
KPY 62 RK	$P_0 \dots P_N$	0 ... 600	mbar	Q62705-K319
KPY 63 RK		0 ... 1.6	bar	Q62705-K320
KPY 64 RK		0 ... 4		Q62705-K321
KPY 65 RK		0 ... 10		Q62705-K322
KPY 66 RK		0 ... 25		Q62705-K292

### Pin Configuration

1	Temp.- Sensor (typ. $R_{25} = 2 \text{ k}\Omega$ )
2	Not connected
3	$+ V_{IN}$ ; Temperature sensor
4	$- V_{OUT}$
5	No pin
6	Shielding, to be connected to $+ V_{IN}$
7	$- V_{IN}$
8	$+ V_{OUT}$

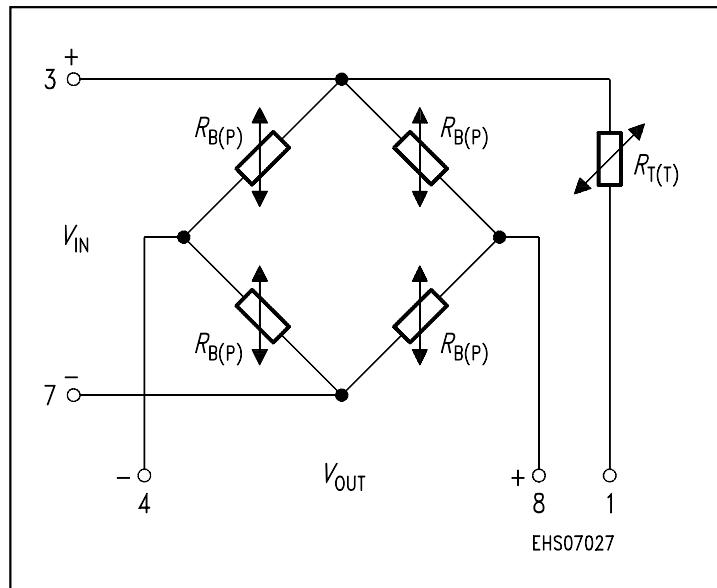

**Absolute Maximum Ratings**

<b>Parameter</b>	<b>Symbol</b>	<b>Limit Values<sup>1)</sup></b>		<b>Unit</b>
		<b>Frontside</b>	<b>Rearside</b>	
Pressure overload KPY 65 RK KPY 66 RK	$P_{\text{MAX}}$	20	10	bar
		50	10	
Operating temperature range	$T_A$	– 40 ... + 125		°C
Storage temperature range	$T_{\text{stg}}$	– 40 ... + 125		°C
Supply voltage	$V_{\text{IN}}$	12		V

- 1) Frontside coupling applies pressure onto chip face.  
 Rearside coupling applies pressure through Kovar centre tube.

**Electrical Characteristics**

at  $T_A = 25$  °C and  $V_{\text{IN}} = 5$  V, unless otherwise specified.


<b>Parameter</b>	<b>Symbol</b>	<b>Limit Values</b>			<b>Unit</b>
		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
Bridge resistance	$R_B$	4	–	8	kΩ
Sensitivity KPY 65 RK KPY 66 RK	$s$	3.6	5.2	8.0	mV/ Vbar
		1.1	2.1	3.0	
Output voltage KPY 65 RK KPY 66 RK	$V_{\text{fin}}$	180	260	400	mV
		150	260	370	
Offset voltage $P = P_0$	$V_0$	– 25	–	+ 25	mV
Linearity error (Best fit straight line) $P_0 = P_0 \dots P_N$ KPY 65 ... 66 RK	$F_L$	–	± 0.3	± 0.5	% $V_{\text{fin}}$
		–	± 0.1	–	
Pressure hysteresis $P_1 = P_0, P_2 = P_N, P_3 = P_0$ KPY 65 ... 66 RK	$P_H$	–	–	–	% $V_{\text{fin}}$

**Electrical Characteristics**at  $T_1 = 25^\circ\text{C}$ ,  $T_2 = 125^\circ\text{C}$ ,  $T_3 = 25^\circ\text{C}$  and  $V_{\text{IN}} = 5\text{ V}$ , unless otherwise specified.


Parameter	Symbol	Limit Values			Unit
		min.	typ.	max.	
Temperature coefficient of $V_{\text{fin}}$ KPY 65 ... 66 RK	$TC_{V_{\text{fin}}}$	– 0.22	– 0.18	– 0.15	%/K
Temperature coefficient of $V_0$ KPY 65 ... 66 RK	$TC_{V_0}$	– 0.02	–	+ 0.02	%/K
Temperature coefficient of $R_B$ KPY 65 ... 66 RK	$TC_{R_B}$	–	+ 0.23	–	%/K
Temperature hysteresis of $V_0$ ; $V_{\text{fin}}$ KPY 65 ... 66 RK	$TH$	–	± 0.2	–	% v. $V_{\text{fin}}$

**Package Outline****Similar to TO-39-3**

Basic Component

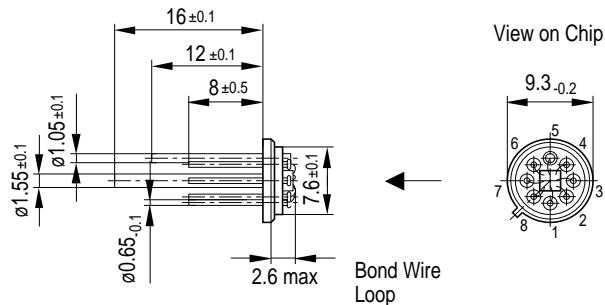

Component Delivery Form

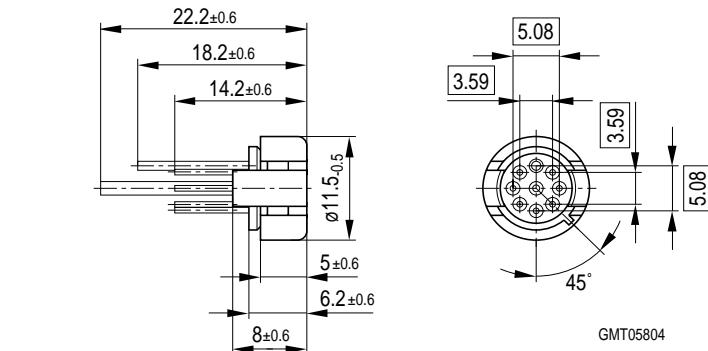

Dimensions in mm

**Exterior Packaging**

I.e. tubes, trays, boxes are shown in our Data Book "Package Information".