

# JUTXA W Series

## General Specifications

Model : WH1A/V

Isolator

JUTXA

### 1. GENERAL

This isolator converts DC current signals or voltage signals to current or voltage signals.

### 2. SPECIFICATIONS

IO Specifications	
Input signal	DC voltage or current signals
Measuring range	-10~+10V DC, span: 10mV min where zero elevation is $\pm 50\%$ max of span
Input resistance	1 M $\Omega$ for voltage input. 100 $\Omega$ ~ 1k $\Omega$ for current input
Permissible applied voltage	$\pm 30$ V DC max
Output signal	DC current or voltage signal
Zero point adjustment range	$\pm 5\%$ of span
Span adjustment range	$\pm 5\%$ of span
Standard performance	
Precision rating	$\pm 0.1\%$ of span
Response speed	150ms 63% response (10~90%)
Insulation resistance	100M $\Omega$ min (at 500V DC) between input~output~power supply (DC drive) input~output~power supply~ground (AC drive)
Voltage withstand	1500V AC/minute between input~output, input~power supply 500V AC/minute between output~power supply (DC drive) 1500V AC/minute between input~output~power supply~ground (AC drive)
Ambient temperature and humidity	Normal operating condition: 0~50°C, 5~90% RH Operating limit: -10~60°C, 5~95% RH Storage condition: -40~70°C, 5~95% RH (No condensation)
Power supply voltage	85~264V AC 47~63Hz, 24V DC $\pm 10\%$
Effect of power supply voltage fluctuation	$\pm 0.1\%$ max of span per 85~264V AC or 24V DC $\pm 10\%$ fluctuation
Effect of change in ambient temperature	$\pm 0.2\%$ max of span per 10°C change in temperature
Current dissipation	24V DC 102mA (WH1A-1), 80mA (WH1V-1)
Power dissipation	100V AC 10VA (WH1A-2), 6VA (WH1V-2)
Mountings and dimensions	
Material	Case: ABS plastic
Boards	Both sides glass-epoxy
Mounting methods	Rack, wall, or DIN rail
Connection method	M4-screw terminals
External dimensions	72 x 48 x 127 mm (h x w x d)
Weight	DC drive: approx. 150g, AC drive : approx. 300g
Accessories	
Tag number labels: 1	
Mounting blocks: 2	M4 mounting screws: 4

WH1□-□□-□ \*B

**TYPE NO.**

**OUTPUT SPECIFICATION**

A: Current

V: Voltage

**INPUT SIGNAL**

A: 4~20mA DC	1: 0~10mV DC
B: 2~10mA DC	2: 0~100mV DC
C: 1~5mA DC	3: 0~1V DC
D: 0~20mA DC	4: 0~10V DC
E: 0~16mA DC	5: 0~5V DC
F: 0~10mA DC	6: 1~5V DC
G: 0~1mA DC	7: -10~-+10V DC
H: 10~50mA DC	0: (custom) voltage signal (±300V max)
Z: (custom) current signal (150mA max)	

**OUTPUT SIGNAL**

WH1A	WH1V
A: 4~20mA DC	1: 0~10mV DC
B: 2~10mA DC	2: 0~100mV DC
C: 1~5mA DC	3: 0~1V DC
D: 0~20mA DC	4: 0~10V DC
E: 0~16mA DC	5: 0~5V DC
F: 0~10mA DC	6: 1~5V DC
G: 0~1mA DC	7: -10~-+10V DC
Z: (custom) current signal (24mA max)	0: (custom) voltage signal (±10V max)

**POWER SUPPLY**

1: 24V DC±10% 2: 85~264V AC

#### High Voltage Withstand Specifications

The JUXTA W Series is also available in 2000V AC voltage withstand specifications. Contact your dealer for details.

#### OUTPUT RESISTANCE AND PERMISSIBLE LOAD RESISTANCE

WH1A (DC Current Output)		
Output Signal	Output Resistance	Permissible Load Resistance
4~20mA DC		0~750Ω
2~10mA DC		0~1500Ω
1~5mA DC		0~3000Ω
0~20mA DC		0~750Ω
0~16mA DC		0~900Ω
0~10mA DC		0~1500Ω
0~1 mA DC		0~15kΩ
Others where $I_{100}=24mA$ max		$(15/I_{100})\Omega$ max
		$I_{100} : 100\%$ output current


WH1V (DC Voltage Output)		
Output Signal	Output Resistance	Permissible Load Resistance
0~10mV DC		250kΩ min
0~100mV DC	100Ω max	
0~1V DC		2kΩ min
0~10V DC		10kΩ min
0~5V DC		2kΩ min
1~5V DC		2kΩ min
-10~-+10V DC		10kΩ min
Others where $V_{100}\leq 100mV$	100Ω max	250kΩ min
$V_{100}>100mV$	1Ω max	10kΩ min
		$V_{100} : 100\%$ output voltage

#### DUAL OUTPUT SPECIFICATIONS


Model	1st Output (selectable)	2nd Output
WH1A	4~20mA DC 2~10mA DC 1~5mA DC 0~20mA DC 0~16mA DC 0~10mA DC 0~1mA DC	1~5V DC
WH1V	0~10mV DC 0~100mV DC 0~1V DC 0~10V DC 0~5V DC 1~5V DC -10~-+10V DC	1~5V DC

The JUXTA W Series allows dual output.  
Enter DO after the model code when ordering.

#### WIRING DIAGRAM

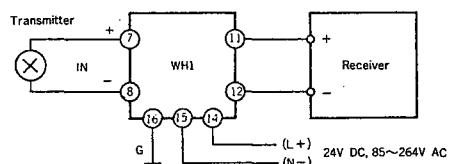

#### EXTERNAL DIMENSION

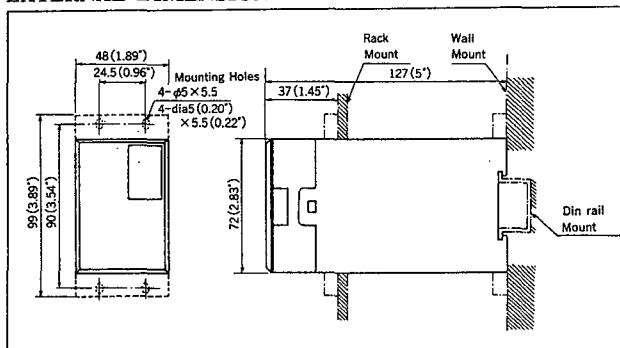

Subject to change without notice for grade up quality and performance