



PD57018 PD57018S

RF POWER TRANSISTORS The *LdmoST* Plastic FAMILY

TARGET DATA


N-CHANNEL ENHANCEMENT-MODE LATERAL MOSFETs

- EXCELLENT THERMAL STABILITY
- COMMON SOURCE CONFIGURATION
- POUT = 18 W with 14 dB gain @ 960 MHz / 28V
- NEW RF PLASTIC PACKAGE

DESCRIPTION


The PD57018 is a common source N-Channel, enhancement-mode, lateral Field-Effect RF power transistor. It is designed for high gain, broad band commercial and industrial applications. It operates at 28V in common source mode at frequencies of up to 1GHz. PD57018 boasts the excellent gain, linearity and reliability of ST's latest LDMOS technology mounted in the first true SMD plastic RF power package, PowerSO-10RF. PD57018's superior linearity performance makes it an ideal solution for base station applications.

The PowerSO-10 plastic package, designed to offer high reliability, is the first ST JEDEC approved, high power SMD package. It has been specially optimized for RF needs and offers excellent RF performances and ease of assembly.



PowerSO-10RF
(Formed Lead)

ORDER CODE	BRANDING
PD57018	XPD57018



PowerSO-10RF
(Straight Lead)

ORDER CODE	BRANDING
PD57018S	XPD57018S

ABSOLUTE MAXIMUM RATINGS($T_{CASE} = 25^{\circ}C$)

Symbol	Parameter	Value	Unit
$V_{(BR)DSS}$	Drain-Source Voltage	65	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Drain Current	2.5	A
P_{DISS}	Power Dissipation (@ $T_c = 70^{\circ}C$)	31.7	W
T_j	Max. Operating Junction Temperature	165	$^{\circ}C$
T_{STG}	Storage Temperature	-65 to 175	$^{\circ}C$

THERMAL DATA($T_{CASE} = 70^{\circ}C$)

$R_{th(j-c)}$	Junction-Case Thermal Resistance	3.0	$^{\circ}C/W$
---------------	----------------------------------	-----	---------------


ELECTRICAL SPECIFICATION($T_{CASE} = 25\text{ }^{\circ}\text{C}$)

STATIC


Symbol	Parameter			Min.	Typ.	Max.	Unit
$V_{(BR)DSS}$	$V_{GS} = 0\text{ V}$	$I_{DS} = 10\text{ mA}$		65			V
I_{DSS}	$V_{GS} = 0\text{ V}$	$V_{DS} = 28\text{ V}$				1	μA
I_{GSS}	$V_{GS} = 20\text{ V}$	$V_{DS} = 0\text{ V}$				1	μA
$V_{GS(Q)}$	$V_{DS} = 28\text{ V}$	$I_D = 50\text{ mA}$		2.0		5.0	V
$V_{DS(ON)}$	$V_{GS} = 10\text{ V}$	$I_D = 1\text{ A}$			0.3		V
g_{FS}	$V_{DS} = 10\text{ V}$	$I_D = 1\text{ A}$					mho
C_{ISS}	$V_{GS} = 0\text{ V}$	$V_{DS} = 28\text{ V}$	$f = 1\text{ MHz}$		36		pF
C_{OSS}	$V_{GS} = 0\text{ V}$	$V_{DS} = 28\text{ V}$	$f = 1\text{ MHz}$		19		pF
C_{RSS}	$V_{GS} = 0\text{ V}$	$V_{DS} = 28\text{ V}$	$f = 1\text{ MHz}$		0.9		pF

DYNAMIC

Symbol	Parameter			Min.	Typ.	Max.	Unit
P_{OUT}	$V_{DD} = 28\text{ V}$	$f = 960\text{ MHz}$	$I_{DQ} = 50\text{ mA}$	18			W
G_{PS}	$V_{DD} = 28\text{ V}$	$f = 960\text{ MHz}$	$P_{OUT} = 18\text{ W}$ $I_{DQ} = 50\text{ mA}$	14	15		dB
η_D	$V_{DD} = 28\text{ V}$	$f = 960\text{ MHz}$	$P_{OUT} = 18\text{ W}$ $I_{DQ} = 50\text{ mA}$	50	60		%
LOAD Mismatch	$V_{DD} = 2\text{ V}$	$f = 960\text{ MHz}$ ALL PHASE ANGLES	$P_{OUT} = 18\text{ W}$ $I_{DQ} = 50\text{ mA}$	10:1			VSWR

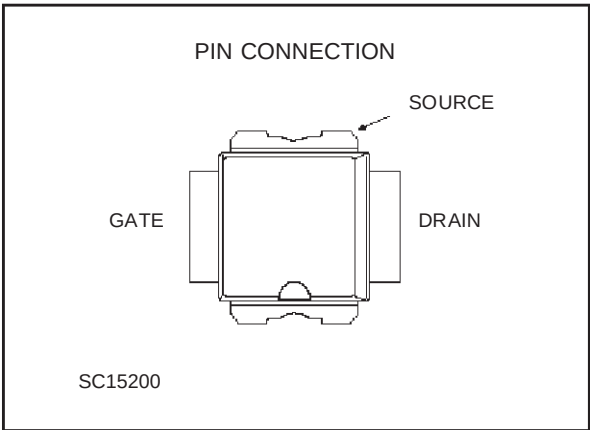

3/4

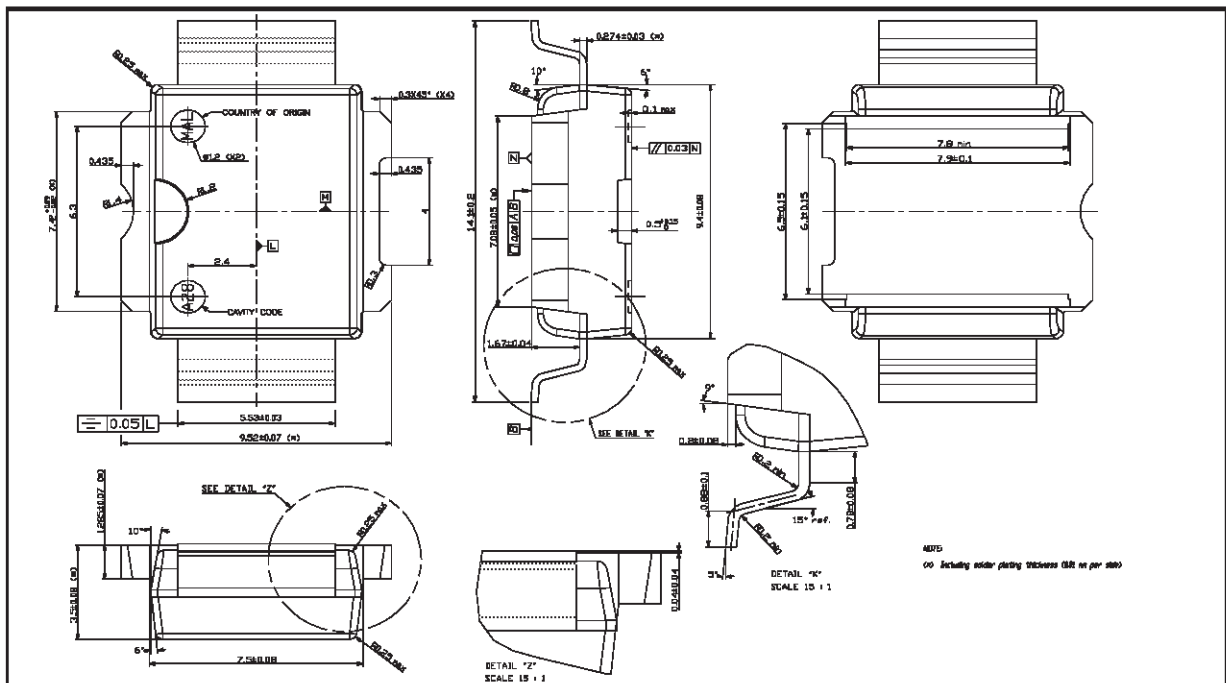

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is registered trademark of STMicroelectronics
® 2000 STMicroelectronics - All Rights Reserved

All other names are the property of their respective owners.

STMicroelectronics GROUP OF COMPANIES
Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco -
Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>