


# ULTRA PRECISION THIN FILM CHIP RESISTORS BLU SERIES

Type BLU1206A

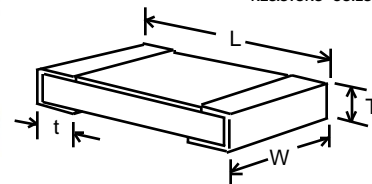

## FEATURES

- Industry's widest range of precision chip resistors!
- Tolerance to  $\pm 0.01\%$ , TCR to 5 ppm/°C
- Wattage rating up to 1/2W
- Unlimited selection of resistance values
- Low cost

## CUSTOM OPTIONS

- Option 'P': Pulse resistant design
- Option 'M': Matched sets
- Option 'ER': Burn-In for Hi-Rel applications
- Option 'B': Increased power rating
- Option 'A': Marking of resis. code (3 or 4 digits), not available on BLU-0201 or BLU-0402

## "BLU-CHIP" Series offers unparalleled performance!

RCD's expertise in the field of ultra-precision resistors since 1973, combined with the latest in automated chip resistor production equipment, enables precision chip resistors at prices comparable to lower grade devices. The BLU-chip design features unsurpassed stability levels, extremely low noise and voltage coefficient, as well as low inductance and capacitance. Consult factory for availability of non-standard values. EIA E-96 and E-24 values are standard in most sizes.

RCD Type	Wattage		Max. Working Voltage*	Max. Overload Voltage <sup>†</sup>	TCR (PPM/°C)	Standard Resistance Range <sup>1</sup>			Dimensions			
	Std	Opt.B				.01%-.05%	.1%-0.25%	0.5%-1%	L	W	T	t
BLU0201	.025W	.0375W	15V	30V	25.50	N/A	N/A	33Ω - 22K	.020±.004	.01±.002	.014±.004	.01±.005
					100	N/A	100Ω - 10K	10Ω - 22K	[.5±.1]	[.25±.05]	[.35±.1]	[.25±.12]
BLU0402	.05W	.075W	25V*	50V	25	N/A	100Ω - 10K	100Ω - 10K	.040±.004	.020±.002	.014±.004	.01±.005
					50,100	N/A	100Ω - 100K	10Ω - 100K	[1.0±.1]	[.5±.05]	[.35±.1]	[.25±.12]
BLU0603	.062W	.093W	50V*	100V	25.50	100Ω - 10K	100Ω - 33K	100Ω - 100K	.063±.008	.031±.006	.018±.006	.012±.008
					100	100Ω - 10K	10Ω - 33K	10Ω - 330K	[1.6±.2]	[.8±.15]	[.45±.15]	[.3±.2]
BLU0805	.10W	.125W	100V*	200V	5, 10	100Ω - 100K	100Ω - 100K	100Ω - 100K	.079±.006	.050±.006	.018±.006	.014±.008
					25,50,100	100Ω - 100K	100Ω - 1M	10Ω - 1M	[2.0±.15]	[1.25±.15]	[.45±.15]	[.30±.2]
BLU1206	.125W	.25W	150V*	300V	5, 10	100Ω - 100K	100Ω - 249K	100Ω - 249K	.126±.006	.063±.006	.020±.006	.020±.010
					25,50,100	100Ω - 100K	49.9Ω - 1M	10Ω - 1M	[3.2±.15]	[1.6±.15]	[.50±.15]	[.51±.25]
BLU1210	.25W	.5W	200V*	400V	10	100Ω - 100K	100Ω - 130K	100Ω - 130K	.126±.006	.098±.008	.024±.008	.020±.010
					25,50,100	100Ω - 100K	51Ω - 240K	10Ω - 510K	[3.2±.15]	[2.5±.2]	[.61±.2]	[.51±.25]
BLU1612	.33W	.66W	250V*	500V	10	100Ω - 100K	10Ω - 1M	10Ω - 1M	.165±.008	.118±.008	.028±.006	.030±.016
					25,50,100	100Ω - 100K	10Ω - 1M	10Ω - 1M	[4.2±.2]	[3.0±.2]	[.7±.15]	[.76±.4]


\*Maximum working voltage determined by  $E = \sqrt{PR}$ , E should not exceed value listed. Increased voltage ratings available.  
<sup>†</sup> Extended range available, consult factory.

## TYPICAL PERFORMANCE CHARACTERISTICS


Requirements	Characteristics (5-25ppm)*	Test Method
Short Time Over Load	$\pm 0.05\%$ ( $\pm 0.1\%$ Opt.B)	Rated W x 2.5, 5 seconds at 25°C (not to exceed Max Overload Voltage)
Resistance to Soldering Heat	$\pm 0.05\%$	260 $\pm$ 5°C, 3 seconds
High Temperature Exposure	$\pm 0.1\%$	100 hours @ +125°C
Thermal Shock	$\pm 0.1\%$	-55°C to +125°C, 0.5 hours, 5 cycles
Moisture Resistance	$\pm 0.2\%$	MIL-STD-202 M.103 95% RH 1000 hrs
Load Life (1000 hours)	$\pm 0.1\%$ ( $\pm 0.2\%$ Opt.B)	Rated W per Mil-PRF-55342 4.8.11.1
Extended Life (10,000 hrs)	$\pm 0.25\%$ ( $\pm 0.4\%$ Opt.B)	Rated W per Mil-PRF-55342 4.8.11.1
Solderability	95% (Min.)	MIL-Std-202, Method 208
Shelf Life	100 ppm/year (Max.)	Room Temp. & Humidity, No-Load
Dielectric Withstanding Voltage	250V (100V 0402 & 0603)	60 Seconds, terminal to ceramic

\*The typical  $\Delta R$  level of chips with 50ppm TCR is double that of chips with 5 to 25ppm

## P/N DESIGNATION:

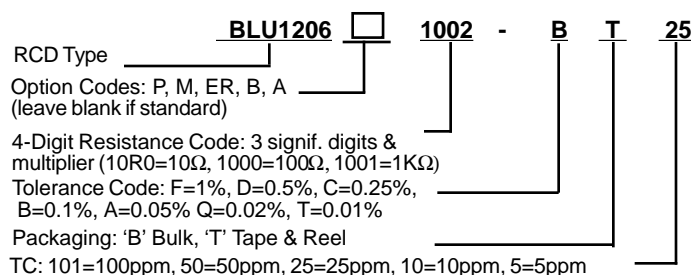


## CONSTRUCTION

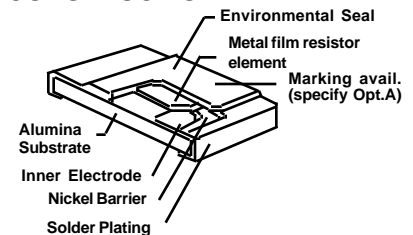

## DERATING CURVE

Resistors may be operated up to full rated power with consideration of mounting density, pad geometry, PCB material, and ambient temperature.

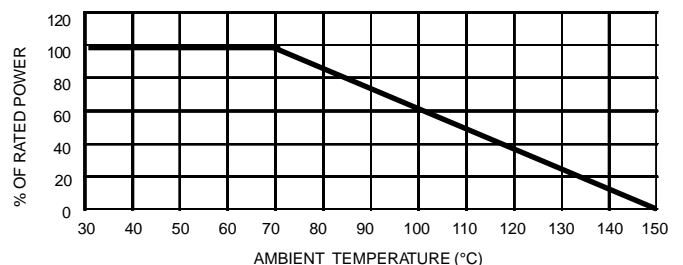

**RCD Components Inc.**, 520 E. Industrial Park Dr., Manchester, NH USA 03109  
 Tel: (603) 669-0054 Fax: (603) 669-5455 E-mail: rcdcompinc@aol.com www.rcd-comp.com

FA013 Specifications subject to change without notice