



## SteelVine™ Host Controller

### Ultra ATA/133 PCI-to-ATA Host Controller

Silicon Image's SiI0680 is a standalone Ultra ATA/133 host controller designed to accommodate the transfer of large amounts of content-rich data common in today's multimedia applications. The SiI0680 provides OEMs with a fast, new interface incorporating the latest advancements in hard disk technology. Based on the Ultra ATA/133 interface specification, the SiI0680 supports a 133 MB/s burst transfer rate and features 48-bit sector addressing, thereby enabling the utilization of drives with capacities greater than 137 GB.


The SiI0680 is a single-chip solution for designs based on chipsets without an integrated ATA host controller, or those requiring a greater number of ATA channels to accommodate the growing number of storage peripherals with an ATA interface. By simply adding a card with the SiI0680 and loading the accompanying driver, any system with a PCI bus interface may upgrade to the Ultra ATA/133 interface.

The SiI0680 enables PC manufacturers to support as many as four drives and incorporate the newest drive standards—all at a lower cost. With the

SiI0680, other manufacturers, such as motherboard, add-in card and embedded application companies, can incorporate a cost-effective, hard disk drive solution without sacrificing performance or flexibility.

For enhanced performance, the SiI0680 can be packaged with Silicon Image's robust Medley™ ATA software RAID, which optimizes throughput and data redundancy. Supporting RAID sets of up to four hard disk drives, Medley enables RAID 0 Striping, RAID 1 Mirroring and RAID 0+1 Mirrored Striping.

SiI0680 System Diagram

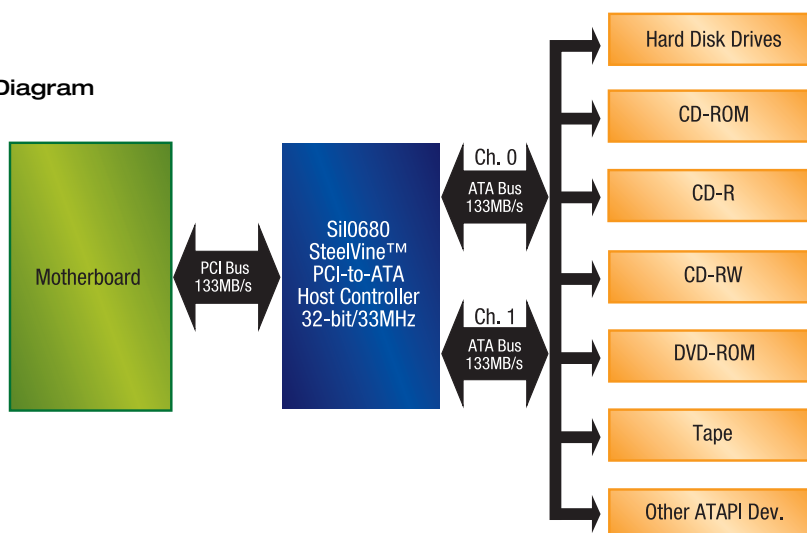

## SiI0680

### Applications

- PC motherboards
- PC add-in card
- Embedded storage applications

### Key Features

- Supports ATA/133
- Provides 48-bit addressing
- Supports external flash
- Includes Windows OS drivers

# Sil0680 Features

## Sil0680 Starter Kit

The starter kit includes hardware, software and documentation to quickly bring ATA/133 and 48-bit sector-addressing compliance to computer systems, motherboards, add-in cards and embedded solutions. Contents include:

### Hardware

- Reference design board
- Two ATA cables

### Software

- Operating system drivers for DOS, Windows 95/98, ME, NT4, 2000 and XP
- Configuration utility
- Flash utility
  - Base BIOS
  - Medley RAID BIOS
- RAID operating system drivers for Windows 98, ME, NT4, 2000, and XP

### Documentation

- Sil0680 install guide
- Medley ATA software RAID users guide
- Sil0680 data sheet

### General

- ATA/133
- 48-bit sector addressing
- Dual independent DMA channels with 256B FIFO per channel
- Virtual DMA
- Read ahead
- Command buffering
- Supports temperature from 0°C to 70°C
- Supports external Flash
- Supports external BIOS
- 80-pin cable detect

### Transfer Rates

- PIO-0, 1, 2, 3, 4
- MDMA Mode 0, 1, 2
- Ultra 33, 66, 100 and 133
- Supports bus master DMA at 133 MB/sec burst rate

### PCI Bus

- 32-bit, 33 MHz
- PCI 2.2 compliant

### Power

- 3.3V Operating Voltage with 5V tolerant I/O
- ACPI: PCI Bus Power Management Spec 1.1 compliant


### Package

- 144-pin, 20x20 mm LQFP (Low profile Quad Flat Pack)

### RAID (with Silicon Image's Medley™ ATA software RAID)

- RAID 0 (Striping)
- RAID 1 (Mirroring)
- RAID 0+1 (Mirrored-Striping)

## Sil0680 Circuit Diagram

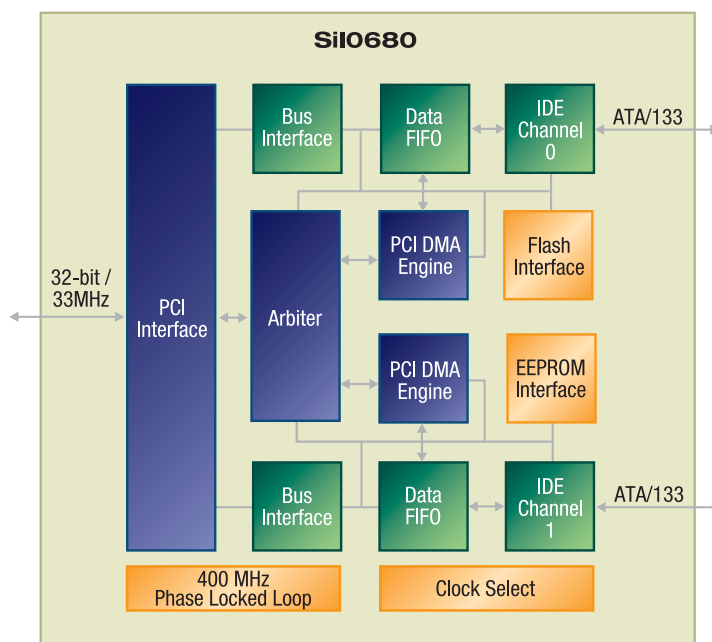

**Silicon Image, Inc.**

1060 E. Arques Avenue  
Sunnyvale, CA 94085

T 408.616.4000

F 408.830.9530

[www.siliconimage.com](http://www.siliconimage.com)

**Simply** Stored. Connected. Beautiful.

© 2006 Silicon Image, Inc. All rights reserved. Silicon Image, the Silicon Image logo, SteelVine, the SteelVine logo, Sil and Sil0680 are trademarks or registered trademarks of Silicon Image, Inc. in the United States and other countries. Other trademarks are property of their respective holders. Product specifications are subject to change without notice.