

Type: CEER3010

Product Description


- 36.3 \times 31.6mm Max.(L \times W), 10.8mmMax. Height.
- In addition to the typical versions of parameters shown here, custom parameters are available to meet your exact requirements.




♦ Feature

- Max. Operating frequency 500kHz, Max. Operating Power 35.0W(100kHz).
- Ideally used as automotive HID transformer, can also be used as general transformer.
- RoHS Compliance

Dimensions (mm)

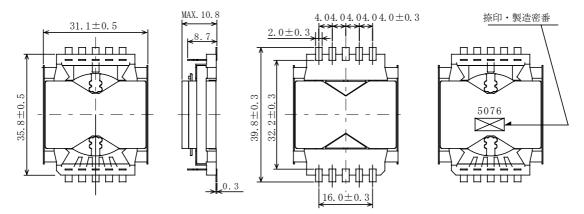

◆ Schematics (Bottom)



"S" indicates winding start.

Specification

Sample No.	Inductance (6-8) 1kHz/1V	Inductance (9-10) 1kHz/1V	D.C.R. (6-8) Max.	Temperature rise current (A)(1,2-4,5)	DC saturation current (A)(1,2-4,5)
4366-T016	940 μ H±20%	250 μ H \pm 20%	4.25 Ω	8.0	12.0