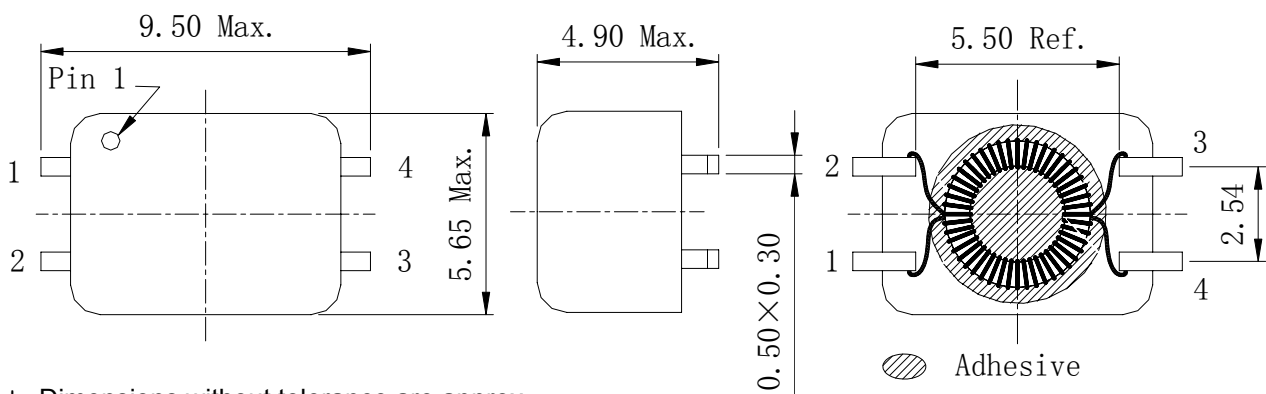


Type: CPFC54
◆ Product Description

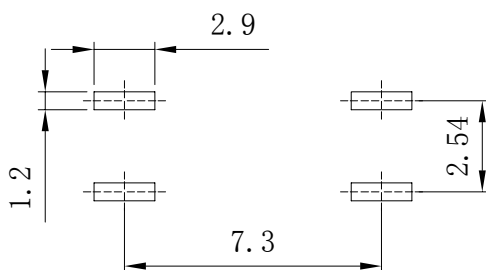
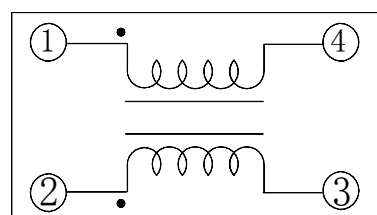
- 9.5×5.65mm Max.(L×W), 4.90mm Max. Height .

◆ Feature

- Ideally used in CAN BUS ,AV,OA equipment.
- RoHS Compliance.


◆ Dimensions (mm)


- * Dimensions without tolerance are approx.
- * Dimension does not include solder used on coil.
- * Pin pitch shall be measured at the root of terminal.

◆ Land Pattern (mm)

◆ Schematics (Bottom)


Type: CPFC54
◆ Specification

Part Name	Stamp	Inductance (μH) (1-4) or (2-3) ※1	L _s (nH)Typ. 1-4(2+3 short) ※2	I _R (mA)1-2 (3+4short) ※3	D.C.R(mΩ) Typ. (at 20℃)	Hipot DC 2s 0.5mA
CPFC54-050C	050C	5±30%	50	900	100	250
CPFC54-110C	110C	11±30%	50	700	120	250
CPFC54-250C	250C	25±30%	150	700	130	250
CPFC54-250S	250S	25±30%	1500	700	130	250
CPFC54-510C	510C	51±30%	200	600	160	250
CPFC54-510S	510S	51±30%	2000	600	160	250
CPFC54-101C	101C	100±30%	200	500	230	250
CPFC54-471C	471C	470±30%	200	500	200	750
CPFC54-102C	102C	^{+50%} 1000-30%	250	500	200	750
CPFC54-222C	222C	^{+50%} 2200-30%	250	400	400	750
CPFC54-472C	472C	^{+50%} 4700-30%	300	200	650	750

※1、※2 Measuring condition 100kHz, 0.1V

※3 . I_R:DC current when temperature of coil increased up to 40℃.(Ta=20℃)