




## Features

- ✧ High efficiency, low VF
- ✧ High current capability
- ✧ High reliability
- ✧ High surge current capability
- ✧ Low power loss.
- ✧ For use in low voltage, high frequency inverter, free wheeling, and polarity protection application

## Mechanical Data

- ✧ Cases: TO-220AB Molded plastic
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Terminals: Pure tin plated, lead free. solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: As marked
- ✧ High temperature soldering guaranteed: 260°C/10 seconds .16"(.406mm) from case.
- ✧ Weight: 2.24 grams

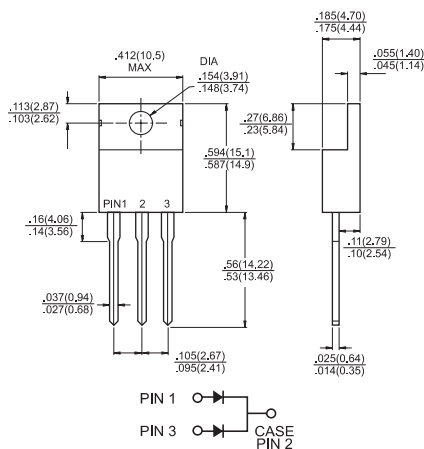

Dimensions in inches and (millimeters)

## Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

| Type Number   | Symbol          | SF 1601G    | SF 1602G | SF 1603G | SF 1604G | SF 1605G | SF 1606G | SF 1607G | S F 1608G | Units              |
|---|-----------------|-------------|----------|----------|----------|----------|----------|----------|-----------|--------------------|
| Maximum Recurrent Peak Reverse Voltage  | $V_{RRM}$       | 50          | 100      | 150      | 200      | 300      | 400      | 500      | 600       | V                  |
| Maximum RMS Voltage   | $V_{RMS}$       | 35          | 70       | 105      | 140      | 210      | 280      | 350      | 420       | V                  |
| Maximum DC Blocking Voltage   | $V_{DC}$        | 50          | 100      | 150      | 200      | 300      | 400      | 500      | 600       | V                  |
| Maximum Average Forward Rectified Current @ $T_C = 100^\circ C$                                     | $I_{(AV)}$      | 16.0        |          |          |          |          |          |          |           | A                  |
| Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method ) | $I_{FSM}$       | 125         |          |          |          |          |          |          |           | A                  |
| Maximum Instantaneous Forward Voltage @ 8.0A  | $V_F$           | 0.975       |          |          | 1.3      |          | 1.7      |          |           | V                  |
| Maximum DC Reverse Current @ $T_A=25^\circ C$ at Rated DC Blocking Voltage @ $T_A=100^\circ C$      | $I_R$           | 10          |          |          |          | 400      |          |          |           | $\mu A$<br>$\mu A$ |
| Maximum Reverse Recovery Time (Note 1)  | $T_{rr}$        | 35          |          |          |          |          |          |          |           | nS                 |
| Typical Junction Capacitance (Note 2)   | $C_j$           | 80          |          |          |          | 60       |          |          |           | pF                 |
| Typical Thermal Resistance (Note 3)   | $R_{\theta JC}$ | 1.5         |          |          |          |          |          |          |           | $^\circ C/W$       |
| Operating Temperature Range   | $T_J$           | -65 to +150 |          |          |          |          |          |          |           | $^\circ C$         |
| Storage Temperature Range   | $T_{STG}$       | -65 to +150 |          |          |          |          |          |          |           | $^\circ C$         |

- Notes: 1. Reverse Recovery Test Conditions:  $I_F=0.5A$ ,  $I_R=1.0A$ ,  $I_{RR}=0.25A$   
 2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.  
 3. Mounted on Heatsink Size of 3" x 5" x 0.25" Al-Plate.

## RATINGS AND CHARACTERISTIC CURVES (SF1601G THRU SF1608G)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

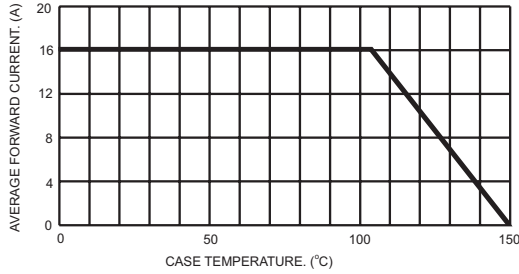


FIG.2- TYPICAL REVERSE CHARACTERISTICS

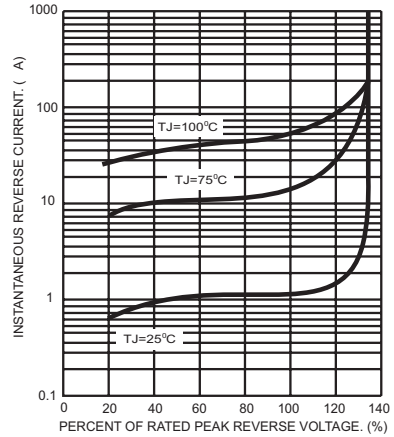


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

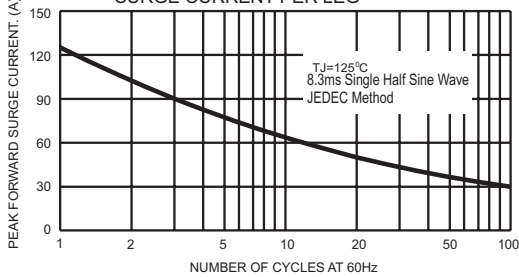


FIG.5- TYPICAL FORWARD CHARACTERISTICS PER LEG

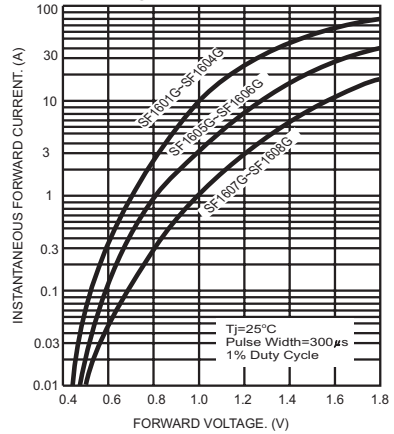


FIG.4- TYPICAL JUNCTION CAPACITANCE PER LEG

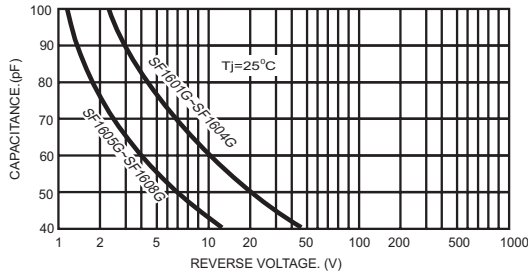


FIG.6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

