

Lightning protection for LNB power supply

Features

- 1 kV, 500 A protection (8/20 μ s 1.2/50 μ s)
- SMC package
- Unidirectional and low V_F
($V_F = 1.2$ V at $I_F = 9$ A)
- Low clamping factor
- Fast response time

Description

The LNBTVSx-304 is a dedicated lightning and electrical overstress surge protection for LNB voltage regulators in satellite set top box applications.

This device provides lightning protection based on the IEEE C62.41.2 standard.

Available in the SMC package, this device is compatible with industry standard mounting processes.

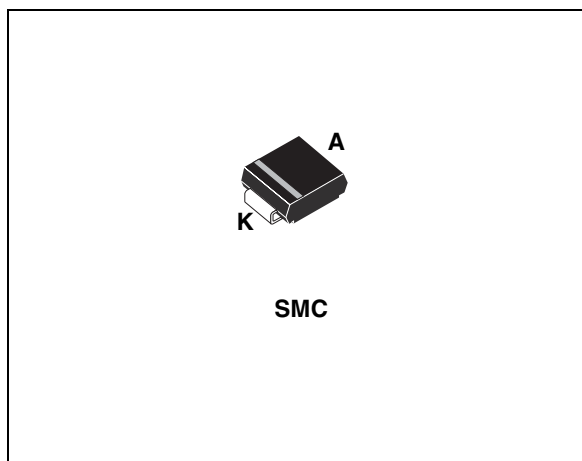


Table 1. Device summary

Characteristic	LNBTVS4-304S	LNBTVS6-304S
Lightning surge level (8/20 μ s 1.2/50 μ s combination wave)	700 V, 350 A	1000 V, 500 A
Clamping voltage (max)	45 V @ 333 A	45 V @ 500 A

1 Characteristics

Table 2. Absolute maximum ratings ($T_{amb} = 25^{\circ} C$)

Symbol	Parameter		Value	Unit	
P_{PP}	Peak pulse power dissipation ⁽¹⁾	T_j initial = T_{amb}	up to 3 kW	W	
P	Peak dissipation on infinite heatsink	$T_{amb} = 75^{\circ} C$	5	W	
I_{FSM}	Non repetitive surge peak forward current for unidirectional types	$T_p = 10$ ms T_j initial = T_{amb}	LNBTVS4-304S	250	A
			LNBTVS6-304S	300	A
T_{stg}	Storage temperature range		-65 to + 175	$^{\circ} C$	
T_j	Maximum junction temperature		150	$^{\circ} C$	
T_L	Maximum lead temperature for soldering during 10 s at 5 mm from case		260	$^{\circ} C$	

1. For a surge greater than the maximum values, the diode will fail in short-circuit.

Table 3. Thermal resistance


Symbol	Parameter	Value	Unit
$R_{th(j-l)}$	Junction to case	20	$^{\circ} C/W$
$R_{th(j-a)}$	Junction to ambient on printed circuit	75	$^{\circ} C/W$

Table 4. Electrical characteristics ($T_{amb} = 25^{\circ} C$)

Symbol	Parameter												
V_{BR}	Breakdown voltage												
I_{RM}	Leakage current @ V_{RM}												
V_{RM}	Stand-off voltage												
V_{CL}	Clamping voltage												
I_{PP}	Peak pulse current												
$R_{I/O}$	Series resistance between Input & Output												
C_{line}	Input capacitance per line												
I_F	Forward current												
V_F	Forward voltage												
Type	$I_{RM} @ V_{RM}$		$V_{BR} @ I_R$				P_{PP} 10/1000 μS	$V_{CL} @ I_{pp}$ 10/1000 μS		$V_{CL} @ I_{pp}$ 8/20 μS (†)		αT	C
	Max		Min	Typ	Max			Max		Max		Max	Typ
	μA	V	V	V	V	mA	W	V	A	V	A	$10^{-4}/^{\circ}C$	pF
LNBTVS4-304S	1	28	30	31.5	33	1	2500	45	56	45	333	9.6	4000
LNBTVS6-304S	1	28	30	31.5	33	1	3000	45	67	45	500	9.6	5000


1. IEEE C62.41.2, $R = 2 \Omega$

Figure 1. Surge test examples at 300 A and 500 A according to IEEE C62.41.2 standard

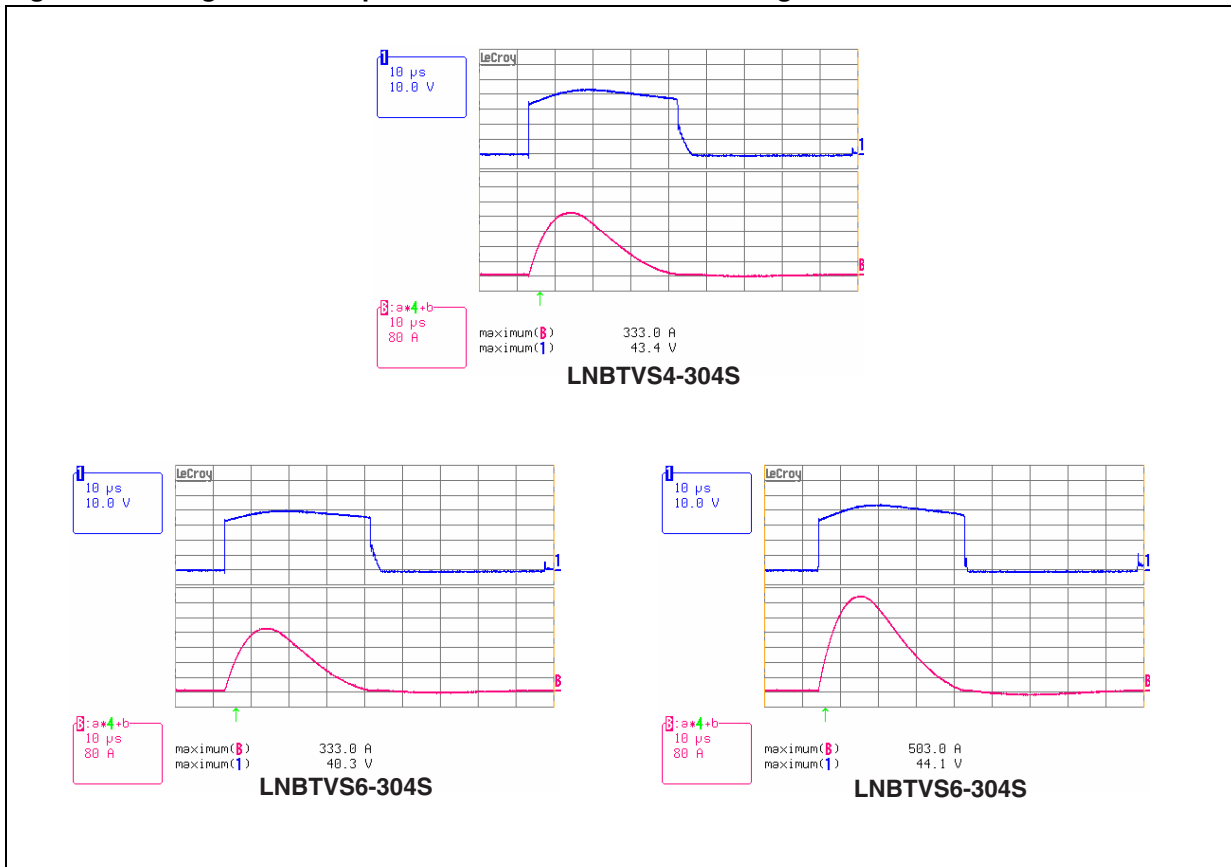

2 Ordering information scheme

Figure 2. Ordering information scheme

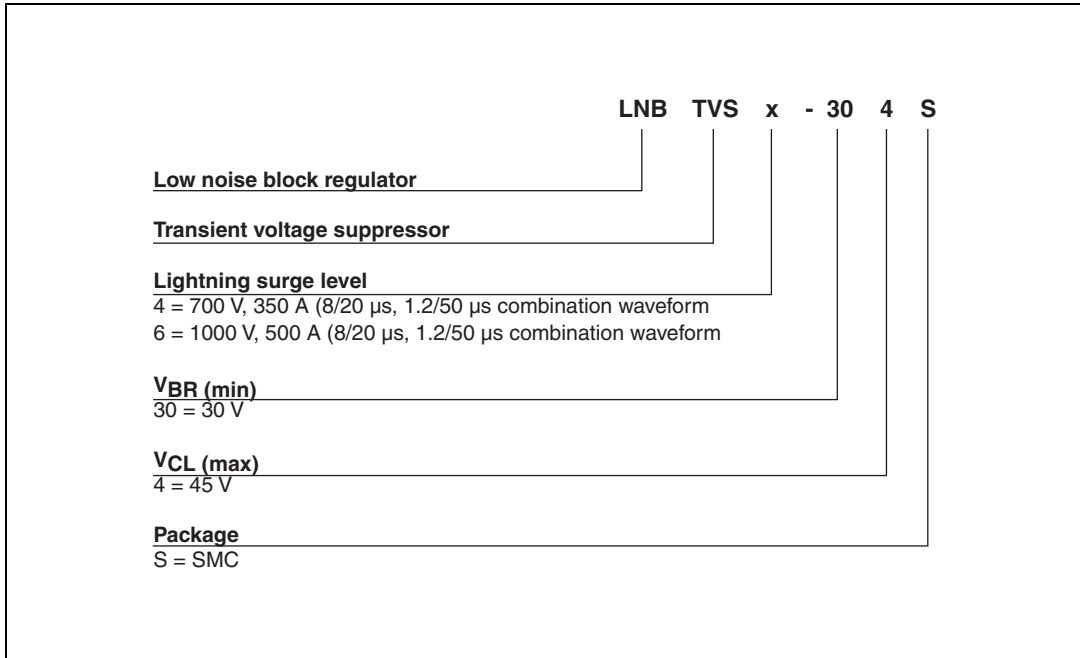

3 Package information

- Epoxy meets UL 94, V0


In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at www.st.com.

Table 5. SMC dimensions

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A1	1.90	2.45	0.075	0.096
A2	0.05	0.20	0.002	0.008
b ⁽¹⁾	2.90	3.20	0.114	0.126
c ⁽¹⁾	0.15	0.40	0.006	0.016
D	5.55	6.25	0.218	0.246
E	7.75	8.15	0.305	0.321
E1	6.60	7.15	0.260	0.281
E2	4.40	4.70	0.173	0.185
L	0.75	1.50	0.030	0.059

1. Dimensions b and c apply to plated leads

Figure 3. SMC footprint, dimensions in mm (inches)

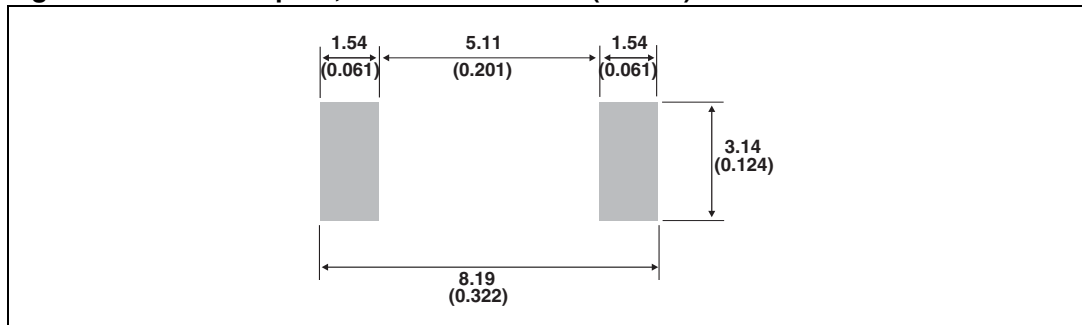

4 Ordering information

Table 6. Ordering information

Order code	Marking	Package	Weight	Base qty	Delivery mode
LNBTVS4-304S	LAD	SMC	0.245	2500	Tape and reel
LNBTVS6-304S	LBC	SMC	0.245	2500	Tape and reel

5 Revision history

Table 7. Revision history

Date	Revision	Changes
1-Apr-2008	1	First release

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2008 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com