

Topstek Current Transducer THDD5A .. THDD50A


THDD 5A~50A

Features

- ◆ Highly reliable Hall Effect device
- ◆ Compact and light weight. Two sensors in one package
- ◆ Fast response time
- ◆ Excellent linearity of the output voltage over a wide input range
- ◆ Excellent frequency response (> 50 kHz)
- ◆ Low power consumption (33 mA nominal)
- ◆ Capable of measuring both DC and AC, both pulsed and mixed
- ◆ High isolation voltage between the measuring circuit and the current-carrying conductor (AC2.5KV)
- ◆ Extended operating temperature range
- ◆ Flame-Retardant plastic case and silicone encapsulate, using UL classified materials, ensures protection against environmental contaminants and vibration over a wide temperature and humidity range

Applications

- ◆ UPS systems
- ◆ Industrial robots
- ◆ NC tooling machines
- ◆ Elevator controllers
- ◆ Process control devices
- ◆ AC and DC servo systems
- ◆ Motor speed controller
- ◆ Electrical vehicle controllers
- ◆ Inverter-controlled welding machines
- ◆ General and special purpose inverters
- ◆ Power supply for laser processing machines
- ◆ Controller for traction equipment e.g. electric trains
- ◆ Other automatic control systems

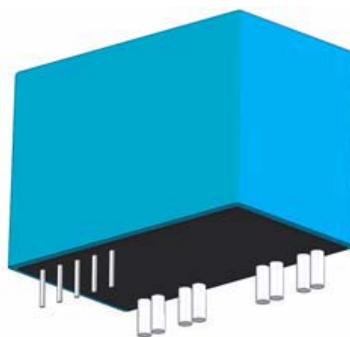


Specifications

Parameter	Symbol	Unit	3A	5A	7.5A	10A	15A	18.5A	20A	25A	30A	37.5A	50A
Nominal Input Current	I _{fn}	ADC	3	5	7.5	10	15	18.5	20	25	30	37.5	50
Linear Range	I _{fs}	ADC	±9	±15	±22.5	±30	±45	±56	±60	±75	±90	±113	±150
Primary Wire Diameter	φd	mm	0.6	0.8	1.0	1.2	1.6	1.6	1.6	1.6	1.6	1.6x2	1.6x2
Nominal Output Voltage	V _{hn}	V	4 V±1% @ I _f =I _{fn} (R _L =10kΩ)										
Offset Voltage	V _{os}	mV	Within ±40 mV @ I _f =0, T _a =25°C										
Output Resistance	R _{OUT}	Ω	<100Ω(50Ωnominal)										
Hysteresis Error	V _{oh}	mV	Within ±35 mV @ I _f =I _{fn} →0										
Supply Voltage	V _{CC/V_{EE}}	V	±15V ±5%										
Linearity	ρ	%	Within ±1% of I _{fn}										
Consumption Current	I _{cc}	mA	±33 mA nominal, ±45 mA max										
Response Time (90%V _{hn})	T _r	μsec	3 μsec max. @ d I _f / dt = I _{fn} / μsec										
Response Performance	-	%	10% Overshoot max.										
Frequency bandwidth (-3dB)	f _{BW}	Hz	DC to 50kHz										
Thermal Drift of Output	-	%/°C	Within ±0.1 %/°C @ I _{fn}										
Thermal Drift of Zero Current Offset	-	mV/°C	< ±2 mV/°C										
Dielectric Strength	-	V	AC2.5KV X 60 sec										
Isolation Resistance @ 1000 VDC	R _{IS}	MΩ	>1000 MΩ										
Operating Temperature	T _a	°C	-15°C to 80°C										
Storage Temperature	T _s	°C	-20°C to 85°C										
Mass	W	g	26 g										


Topstek Current Transducer THDD5A .. THDD50A

Appearance, dimensions and pin identification



All dimensions in mm ± 0.2 , holes $-0, +0.2$ except otherwise noted.

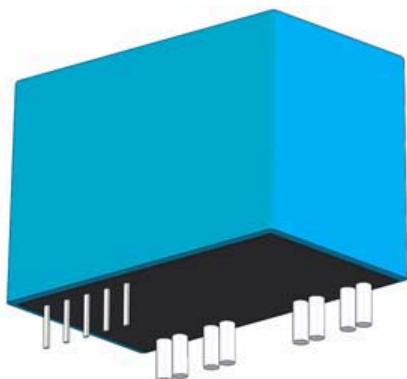

For models $I_{fn} > 30A$ primary wire=1.6φx2

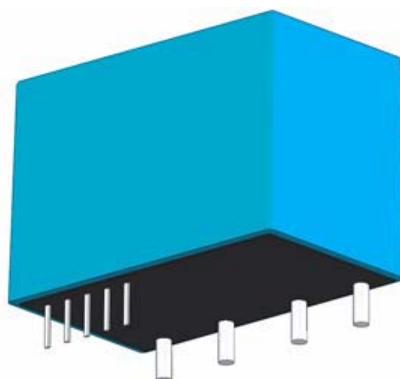

For models $I_{fn} \leq 30A$ primary wire=0.6φ~1.6φx1

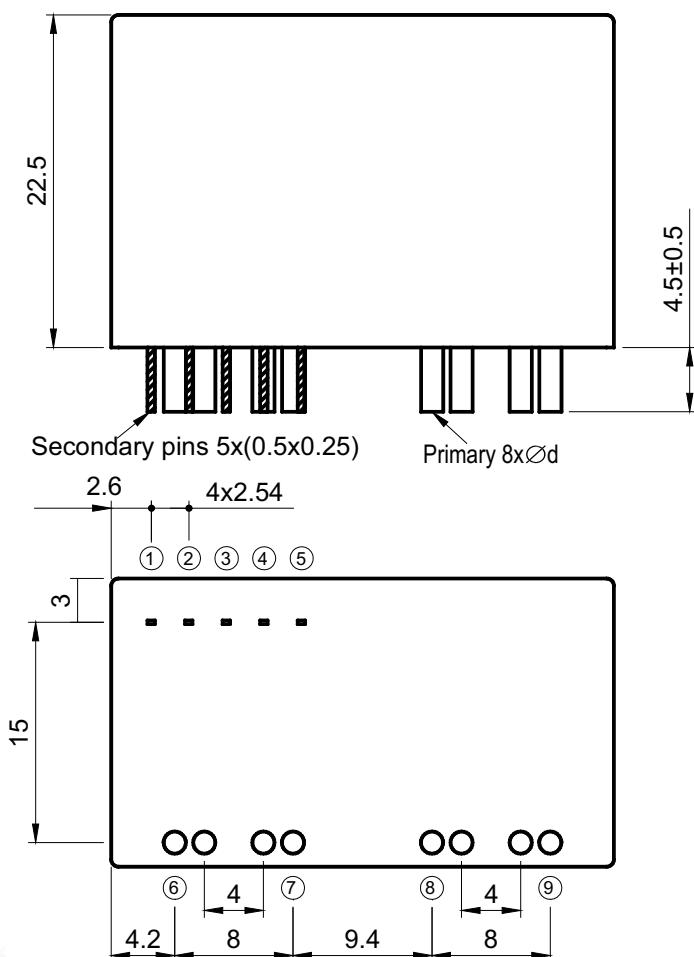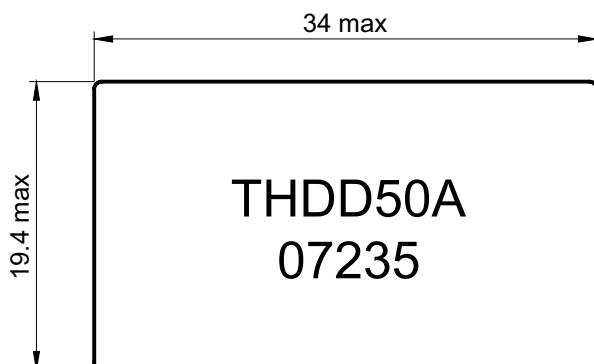

1	Gnd
2	+15V
3	-15V
4	V _{OUT1}
5	V _{OUT2}
6	I ₁₊
7	I ₁₋
8	I ₂₊
9	I ₂₋