


Catalog Part Search:

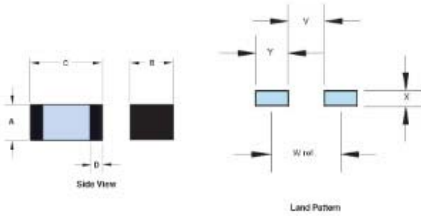

Pkg. Size	A	B	C	D	Wt. (g)	Land Patterns				Reel Information			
						V	W (ref)	X	Y	Tape Width mm	Pitch mm	Parts 7" Reel	Parts 13" Reel
0402 (1005)	0.5±0.05 0.020	0.5±0.05 0.020	1.0±0.05 0.040	0.25±0.15 0.010	0.002	0.40 0.016	1.30 0.051	0.70 0.028	0.90 0.035	8	4	10000	—
0603 (1608)	0.8±0.15 0.031	0.8±0.15 0.031	1.6±0.15 0.063	0.4±0.2 0.016	0.006	0.60 0.024	1.70 0.067	1.00 0.039	1.10 0.043	8	4	4000	10000
0805 (2012)	0.9±0.2 0.035	1.25±0.2 0.049	2.0±0.2 0.079	0.5±0.3 0.020	0.01	0.60 0.024	1.90 0.075	1.50 0.059	1.30 0.051	8	4	4000	10000
1206 (3216)	1.1±0.2 0.043	1.6±0.2 0.063	3.2±0.2 0.126	0.7±0.3 0.028	0.03	1.20 0.047	2.80 0.110	1.80 0.071	1.60 0.063	8	4	3000	10000
1806 (4516)	1.6±0.2 0.063	1.6±0.2 0.063	4.5±0.2 0.177	0.7±0.3 0.028	0.06	2.00 0.079	3.90 0.154	1.80 0.071	1.90 0.075	12	8	2000	10000
1812 (4532)	1.5±0.2 0.063	3.2±0.2 0.126	4.5±0.2 0.177	0.7±0.3 0.028	0.09	2.00 0.079	3.90 0.154	3.40 0.134	1.90 0.075	12	8	1000	5000

Part Number: 2506031027Y0
 Frequency Range: Low Current
 Description: CHZ0.8/0.8/1.6-Y0-102 MULTI-LAYER CHIP BEAD
 Application: Suppression Components
 Where Used: Board Component
 Part Type: Chip Beads
 Preferred Part: ✓

Part Type Information

Mechanical Specifications

Weight: 0.006 (g)

[View Chart Legend](#)

Dim	mm	mm tol	nominal inch	inch misc.	Land Patterns					Winding Information			
					V	W (ref)	X	Y	Z	Turns Tested	Wire Size	1st Wire Length	2nd Wire Length
A	0.80	±0.15	0.031	—	0.600 0.024	1.700 0.067	1.000 0.039	1.100 0.043	—	—	—	—	—
B	0.80	±0.15	0.031	—	Reel Information Tape Width mm: 8, Pitch mm: 4, Parts 7" Reel: 4000, Parts 13" Reel: 10000, Parts 14" Reel: —					Pkg Size 0603 (1608)			
C	1.60	±0.15	0.063	—						Connector Plate # Holes: —, # Rows: —			
D	0.40	±0.20	0.016	—	Cable Information Max Diameter: —, Max Dimension: —, Solid Equivalent: —, Flat Cable Cores: —								
E	—	—	—	—									
F	—	—	—	—									
G	—	—	—	—									
H	—	—	—	—									
J	—	—	—	—									
K	—	—	—	—									

Electrical Specifications

Typical Impedance (Ω)		Electrical Properties	
50 MHz	653	Signal Speed	Standard
100 MHz ⁺	1000 ±25%	Max DCR (Ω)	0.55
500 MHz	241	Max Current (mA)	300
1000 MHz	110		

Impedance Curve

(c) Copyright www.fair-rite.com 2007. All Rights Reserved. Site Map
 Telephone: (888)324-7748 Application Engineering questions: ferrites@fair-rite.com Web Site Questions: webmaster@fair-rite.com