

Features

- DC to 9 GHz
- Low VSWR
- Aluminum Nitride ceramic
- Terminal for lead attachment

Applications

- Isolators
- RF amplifiers

CHF2525CNT Series 9 GHz 40 W Termination Chip


General Specifications

Substrate.....ALN
 Resistive Film.....Thick Film
 Resistance.....50 Ω
 Tolerance.....±5 %
 Packaging
 Bulk100 pcs./bag


Absolute Ratings

Power40 W
 Frequency9 GHz
 VSWR.....1.2 Maximum

Characteristic Curve

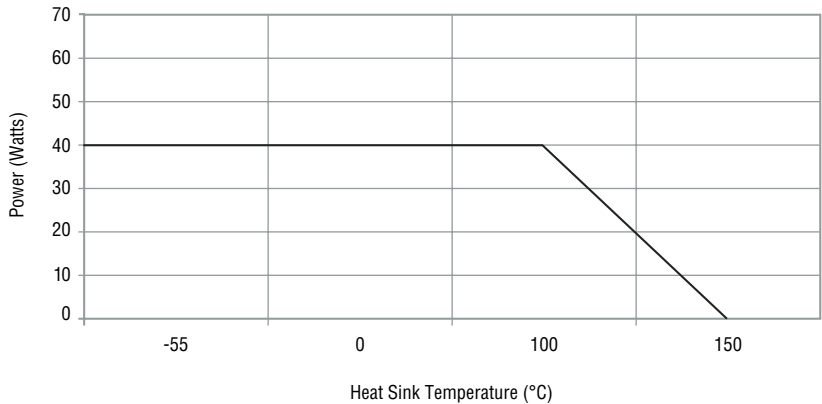

Product Dimensions

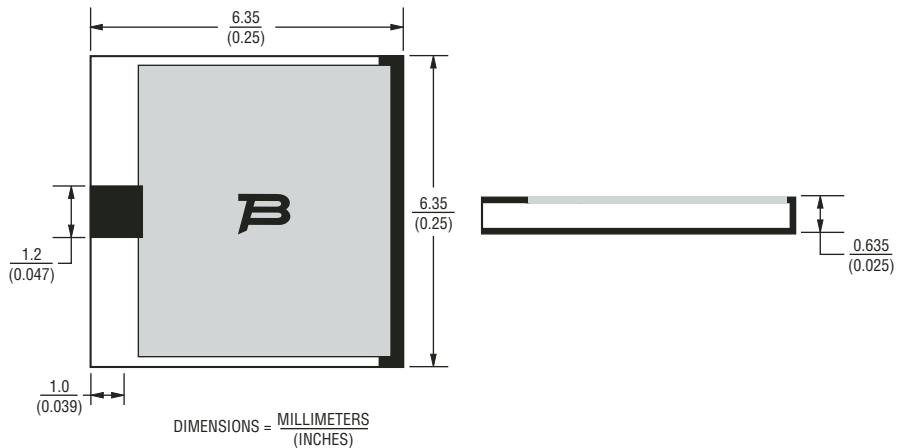

How To Order

CHF 2525 CNT 500 L W

Model _____
 Size _____
 Version _____
 Substrate _____
 Mount _____
 T = Tab
 Value _____
 500 = 50 Ohm
 Function _____
 L = Termination
 Finish _____
 W = NiSn
 X = NiAu



Reliable Electronic Solutions

Asia-Pacific:
 Tel: +886-2 2562-4117
 Fax: +886-2 2562-4116

Europe:
 Tel: +41-41 768 5555
 Fax: +41-41 768 5510

The Americas:
 Tel: +1-951 781-5500
 Fax: +1-951 781-5700

www.bourns.com