

Wideband Impedance Matching Transformer

Impedance Ratio (± 5%)	1 : 1CT
--------------------------	---------


Electrical Specifications at 25°C

Parameter	Min.	Max.	Units
Inductance	780		μH
Leakage Inductance		0.7	μH
Capacitance (C _{W/W})		35	pF
Primary DC Resistance		0.32	ohms
Secondary DC Resistance		0.32	ohms
Insertion loss (.005 - 100 MHz)		3.0	dB
Isolation	500		V _{RMS}


Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

Parts shipped in anti-static tubes. 55 pieces per tube


Available on
Tape & Reel

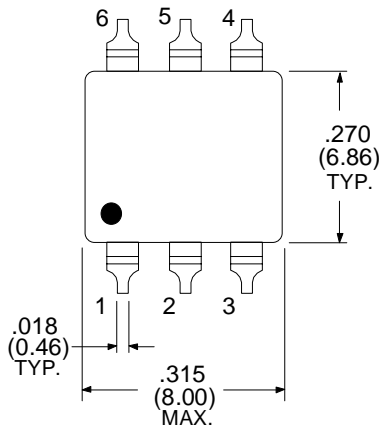

Physical Dimensions
inches (mm)

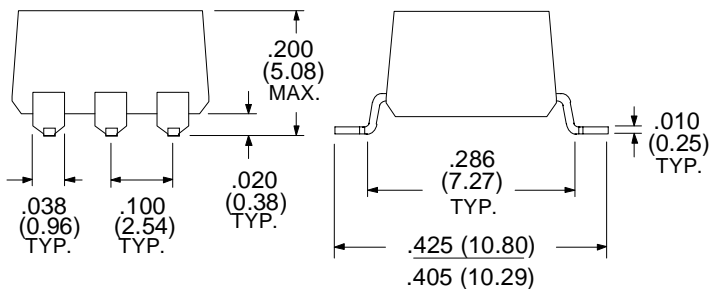

Schematic Diagram



RHOMBUS P/N: T-12077G	
CUST P/N:	NAME:
DATE: 01/21/99	SHEET: 1 OF 1