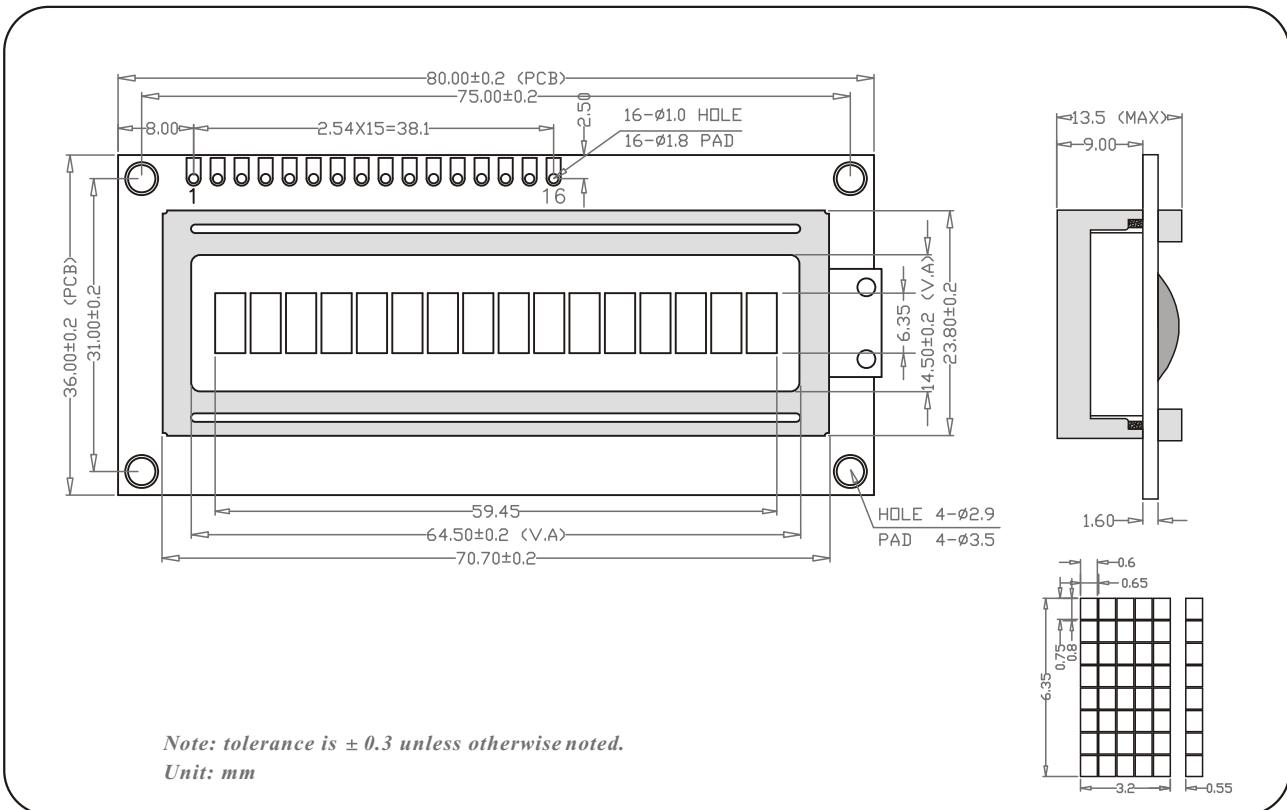


■ CHARACTERISTICS:

DISPLAY CONTENT: 16 × 1 CHARACTERS
 LCD TYPE: STN Y/G、STN BLUE、STN GREY、FSTN
 LED BACKLIGHT: Y/G、WHITE、BLUE、GREEN
 CONTROLLER: KS0066 OR EQUAL
 OPERATING TEMPERATURE: NORMAL(0–50°C); WIDE(-20–70°C)
 POWER SUPPLY: 5.0V
 VIEWING ANGLE: 6H; 12H

■ DIMENSIONS/DISPLAY CONTENT**■ PIN CONFIGURATION**

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Vss	VDD	Vo	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

■ PARAMETER (VDD=5.0 ± 10%, Vss=0V, Ta=25°C)

Parameter		Symbol	Standard Values			Unit
			Min.	Typ.	Max	
Supply voltage		VDD-VSS	4.5	5.0	5.5	
Input voltage	H	VIH	2.2	-	VDD	V
	L	VIL	-0.3	-	0.6	
LCD Drive Voltage		-	-	4.7	-	
Operating current		I _{DD}	-	1.2	3.0	mA

■ APPLICATION CIRCUIT