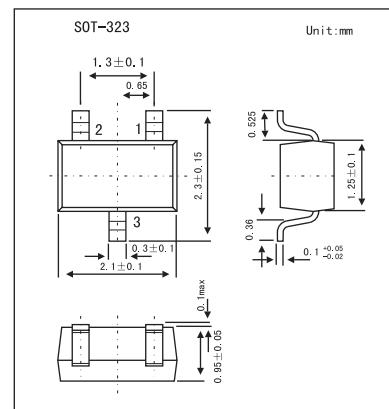


ULTRA HIGH SPEED SWITCHING APPLICATIONS

1SS302

■ Features

- Low forward voltage: $V_F(3) = 0.9 \text{ V(Typ)}$
- Fast reverse recovery time: $t_{rr} = 1.6 \text{ ns (Typ)}$
- Small total capacitance: $C_T = 0.9 \text{ pF(Typ)}$

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Maximum (peak) reverse voltage	V_{RM}	85	V
Reverse voltage	V_R	80	V
Maximum (peak) forward current	I_{FM}	300(*)	mA
Average forward current	I_o	100(*)	mA
Surge current (10 ms)	I_{FSM}	2(*)	A
Power dissipation	P	100	mW
Junction Temperature	T_j	125	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 to +125	$^\circ\text{C}$

(*) Unit rating. Total rating = Unit rating $\times 1.5$

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Forward voltage	$V_F(1)$	$I_F = 1 \text{ mA}$		0.60		V
	$V_F(2)$	$I_F = 10 \text{ mA}$		0.72		
	$V_F(3)$	$I_F = 100 \text{ mA}$		0.90	1.2	
Reverse current	$I_R(1)$	$V_R = 30 \text{ V}$			0.1	μA
	$I_R(2)$	$V_R = 80 \text{ V}$			0.5	
Total capacitance	C_T	$V_R = 0, f = 1.0 \text{ MHz}$		0.9	4.0	pF
Reverse recovery time	t_{rr}	$I_F = 10 \text{ mA}$		1.6	4.0	ns

■ Marking

Marking	C3
---------	----