


FEATURES

- 7.10– 8.50GHz Operating Frequency Range
- 33dBm Output Power at 1dB Compression
- 30.0 dB Typical Power Gain @1dB gain compression
- -42dBc Typical OIM3 @ each tone Pout 22dBm



APPLICATIONS

- Point-to-point and point-to-multipoint radio
- Military Radar Systems



Caution! ESD sensitive device.

ELECTRICAL CHARACTERISTICS (T_b = 25 °C, 50 ohm, V_{dd}=10V, V_{gg}=-5V)

SYMBOL	PARAMETER/TEST CONDITIONS	MIN	TYP	MAX	UNITS
F	Operating Frequency Range	7.1		8.5	GHz
P1dB	Output Power at 1dB Gain Compression	32	33		dBm
G1dB	Gain @1dB gain compression	26.0	30.0		dB
OIMD3	Output 3 rd Order Intermodulation Distortion @Δf=10MHz, Each Tone Pout 22dBm		-42	-38	dBc
Input RL	Input Return Loss		-12	-6	dB
Output RL	Output Return Loss		-6		dB
I_{dd}	Drain Current @small signal output power level		1350	1600	mA
V_{dd}	Drain Supply Voltage		10		V
V_{gg}	Gate Supply Voltage		-5		V
R_{th}	Thermal Resistance		4	4.5	°C/W
T_b	Operating Base Plate Temperature	- 30		+ 80	°C

MAXIMUM RATINGS @25°C^{1,2}

SYMBOL	CHARACTERISTIC	ABSOLUTE	CONTINUOUS ^{1,2}
V_{DD}	Drain Supply Voltage	14V	10V
V_{GG}	Gate Supply Voltage	-10V	-5.5 V
I_{DQ}	Quiescent Drain Current	I _{dss}	1.5A
I_{GG}	Gate Current	150mA	50 mA
P_{IN}	Input Power	8dBm	@ 3dB compression
T_{CH}	Channel Temperature	175°C	150°C
T_{STG}	Storage Temperature	-65/175°C	-65/150°C
P_T	Total Power Dissipation	30W	15W

Notes:

1. Operating the device beyond any of the above rating may reduce MTTF and cause permanent damage.
2. Bias conditions must also satisfy the following equation $V_{dd} \cdot I_{dd} < (T_{CH} - T_b) / R_{TH}$

Specifications are subject to change without notice.




RFMA7185-2W

UPDATED 05/08/08


7.10 – 8.50 GHz Power Amplifier MMIC

TYPICAL PERFORMANCE

1. Small Signal Performance (@V_{DD}= 10V, V_{GG}= -5V)

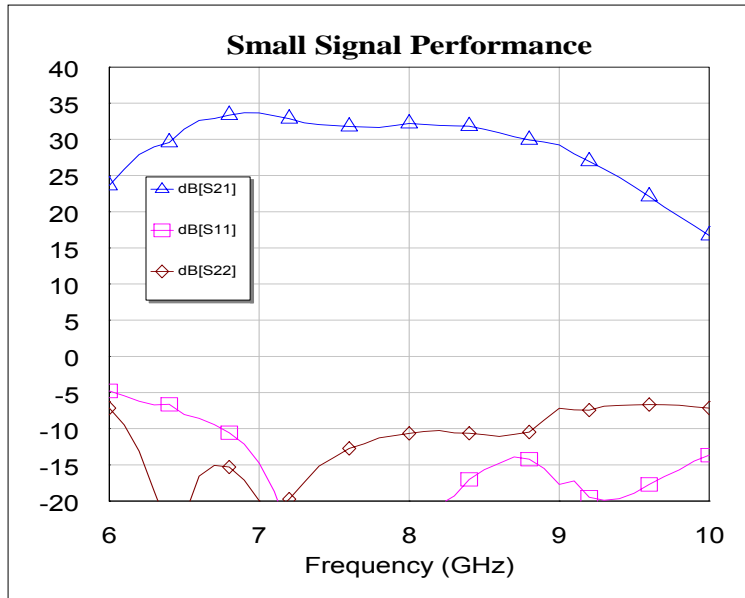

2. P1dB Performance (@V_{DD}= 10V, V_{GG}= -5V)

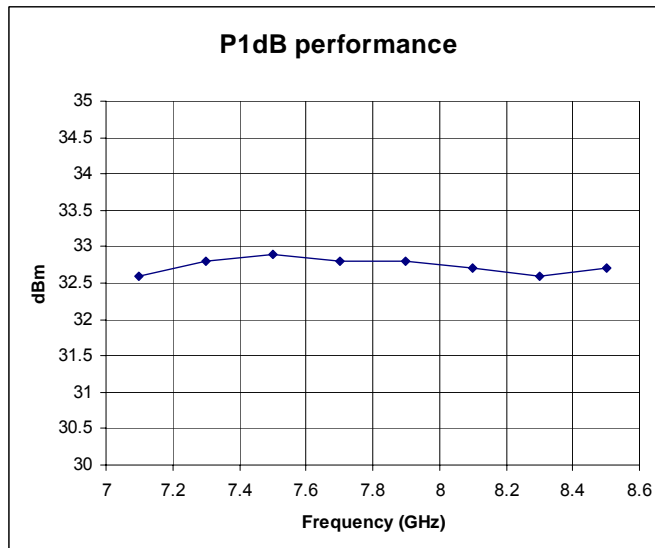

Specifications are subject to change without notice.



RFMA7185-2W

UPDATED 05/08/08

7.10 – 8.50 GHz Power Amplifier MMIC

S-Parameter

Vdd=10V, Vgg=-5V, Idd=1400mA

Frequency GHz	S11		S21		S12		S22	
	Mag	Ang	Mag	Ang	Mag	Ang	Mag	Ang
6.60	0.37	-161.40	42.72	39.43	0.0015	-36.03	0.15	-56.89
6.64	0.37	-168.56	43.34	23.91	0.0014	165.85	0.16	-70.62
6.72	0.33	178.70	44.83	-4.09	0.0017	-115.06	0.18	-93.92
6.80	0.30	163.45	46.54	-32.86	0.0016	-143.12	0.17	-115.19
6.88	0.26	149.69	48.59	-59.99	0.0023	63.13	0.14	-130.23
6.96	0.20	131.90	48.48	-89.10	0.0012	-106.62	0.11	-137.38
7.04	0.15	112.59	47.75	-116.48	0.0004	-71.12	0.10	-135.06
7.12	0.10	98.40	45.77	-142.81	0.0012	74.50	0.09	-117.72
7.20	0.06	79.35	43.93	-167.57	0.0004	-55.78	0.10	-109.81
7.28	0.03	53.57	41.86	169.21	0.0003	175.49	0.13	-111.77
7.36	0.01	-21.99	40.54	147.51	0.0007	6.02	0.16	-117.87
7.44	0.03	-92.23	39.46	125.93	0.0011	-44.70	0.18	-125.79
7.52	0.05	-114.12	39.41	104.16	0.0010	42.49	0.21	-135.26
7.60	0.05	-133.87	38.77	82.15	0.0009	-140.01	0.23	-145.59
7.68	0.06	-143.28	39.02	60.47	0.0005	137.07	0.25	-155.62
7.76	0.07	-154.02	38.30	39.83	0.0015	179.62	0.26	-168.71
7.84	0.07	-156.83	38.97	19.84	0.0019	-17.52	0.27	179.74
7.92	0.07	-160.75	39.55	-2.65	0.0004	-166.71	0.29	166.23
8.00	0.07	-160.18	40.72	-25.41	0.0013	72.81	0.29	151.84
8.08	0.07	-157.45	40.19	-49.74	0.0014	9.16	0.30	138.66
8.16	0.09	-157.84	40.22	-72.70	0.0023	121.94	0.30	121.29
8.24	0.10	-157.80	39.80	-94.56	0.0026	100.54	0.31	105.00
8.32	0.11	-162.94	39.33	-117.62	0.0013	164.20	0.30	85.62
8.40	0.14	-168.71	39.02	-141.78	0.0019	71.06	0.29	69.82
8.48	0.16	-178.97	37.74	-165.59	0.0002	-138.16	0.29	52.41
8.56	0.18	169.86	35.77	170.68	0.0004	151.16	0.28	33.35
8.64	0.19	155.02	34.10	147.99	0.0022	90.78	0.29	18.83
8.72	0.20	145.00	32.82	125.53	0.0014	90.09	0.29	1.74
8.80	0.19	128.23	31.32	103.10	0.0022	-115.01	0.30	-13.94
8.88	0.18	112.00	30.56	80.61	0.0035	-35.73	0.34	-25.37
8.96	0.13	107.83	30.19	55.49	0.0019	-99.22	0.43	-45.99
9.00	0.13	114.64	28.96	41.72	0.0017	-79.80	0.44	-59.01

Specifications are subject to change without notice.

Excelics Semiconductor, Inc. 310 De Guigne Drive, Sunnyvale, CA 94085
 Phone: 408-737-1711 Fax: 408-737-1868 Web: www.excelics.com

page 3 of 5
 Revised May 2008



RFMA7185-2W

UPDATED 05/08/08

7.10 – 8.50 GHz Power Amplifier MMIC

DISCLAIMER

EXCELICS SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. EXCELICS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN.

LIFE SUPPORT POLICY

EXCELICS SEMICONDUCTOR PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF EXCELICS SEMICONDUCTOR, INC.

AS HERE IN:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Specifications are subject to change without notice.

Excelics Semiconductor, Inc. 310 De Guigne Drive, Sunnyvale, CA 94085
Phone: 408-737-1711 Fax: 408-737-1868 Web: www.excelics.com

page 5 of 5
Revised May 2008