



LRC10 Low Resistance Chip Inductors

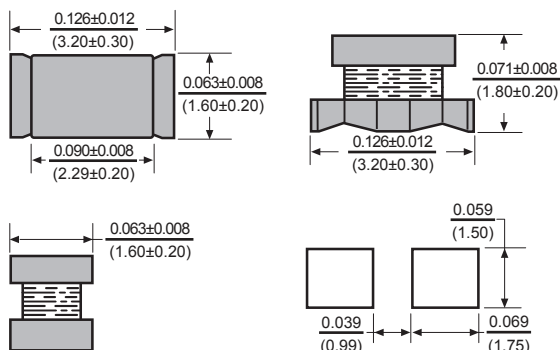

Dimensions: Inches
(mm)

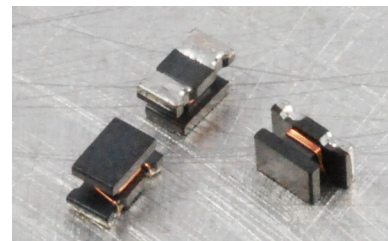

Features

- Miniature SMT wire-wound open magnetic path construction inductors with low DCR, high current capacity and high impedance characteristics.
- Excellent solder heat resistance for flow and reflow soldering methods.
- Excellent for use as choke coils in DC/DC converter and DC power supply circuits.

Electrical

Inductance Range: .12 μ h to 100 μ h.

Tolerance: For 20% use M, 10% use K and 5% use J as part number suffix.

Test Frequency: Inductance measured at 1MHz on HP4192A.

Operating Temp. Range: -25° to +85°C.

Rated Current: Based on Temperature rise not to exceed 35°C. Inductance Drop 10% typical.

Resistance to Soldering Heat: Pre heat: 150°C \pm 10°C / 1-2 min. Solder temp: 260°C \pm 5°C for 10 sec. \pm 1 sec.

Physical

Packaging: 2000 pieces per 7 inch reel.
7500 pieces per 13 inch reel.

Allied Part Number	Inductance (μ h)	Tolerance (%)	Test Freq. (MHz)	SRF Min. (MHz)	DCR Max. (Ω)	Rated Current (mA)
LRC10-R12M-RC	.12	20	1	250	.12	970
LRC10-R22M-RC	.22	20	1	250	.15	850
LRC10-R47M-RC	.47	20	1	180	.22	700
LRC10-1R0M-RC	1.0	20	1	100	.38	510
LRC10-2R2M-RC	2.2	20	1	50	.55	430
LRC10-4R7M-RC	4.7	20	1	31	.85	340
LRC10-100K-RC	10	10	1	20	1.8	230
LRC10-220K-RC	22	10	1	14	4.0	160
LRC10-470K-RC	47	10	1	10	10.5	100
LRC10-101K-RC	100	10	1	7	16.0	80

Available in tighter tolerances.
All specifications subject to change without notice.