

## 59160 Surface Mount Features and Benefits



### Features

- 2 part magnetically operated proximity sensor
- Surface mount technology on to printed circuit board
- J Foot & Gull Wing options
- Tape and reel option (consult Hamlin)
- Moulded stand-off to allow board washing
- Customer defined sensitivity
- Sensor solder reflow capable


### Benefits

- Suitable for pick and place
- No standby power requirement
- Operates through non-ferrous materials such as wood, plastic or aluminium
- Hermetically sealed, magnetically operated contacts continue to operate long after optical and other technologies fail due to contamination

### Applications

- Position and limit sensing
- Security system switch
- Door switch

## DIMENSIONS (in) mm

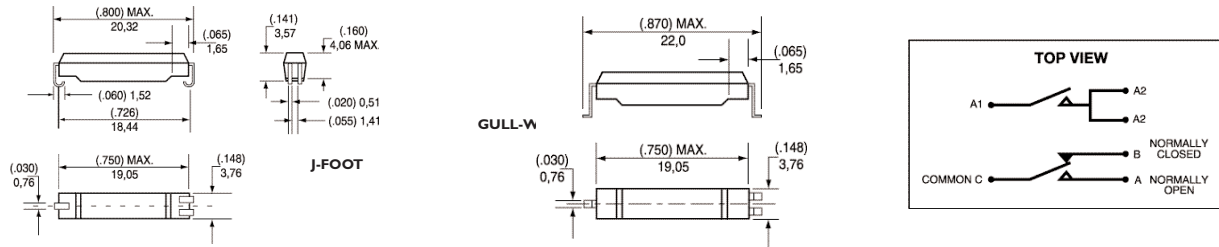

## CUSTOMER OPTIONS - Switching Specifications


TABLE 1 Contact Type			Normally Open	Change Over
Switch Type			1	3
Power	Watt - max.		10	5
	Vdc - max.		200	175
Voltage	Breakdown	Vdc - min.	250	200
	Switching	A - max.	0.5	0.25
Current	Carry	A - max.	1.2	1.5
	Contact, Initial	Ω - max.	0.2	0.2
Resistance	Insulation	Ω - min.	10 <sup>10</sup>	10 <sup>9</sup>
	Contact	pF - typ.	0.3	0.3
Capacitance	Operating	°C	-40 to +105	-40 to +105
	Storage	°C	-65 to +105	-65 to +105
Temperature	Operate	ms - max.	1.0	3.0
	Release	ms - max.	1.0	3.0
Shock	11ms 1/2 sine	G - max.	100	50
Vibration	50-2000 Hz	G - max.	30	30

## CUSTOMER OPTIONS - Sensitivity and Termination Specification

TABLE 2 Sensitivity Options:- Activate Distances are approximate using Hamlin 57050 actuator as illustrated Switch AT before modification						
Select Option	S		T		U	
Switch Type	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm
1 Normally Open	10-15	(.157) 4,0	15-20	(.098) 2,5	20-25	(.079) 2,0
3 Change Over	15-20	(.118) 3,0	20-25	(.079) 2,0	25-30	(.059) 1,5

TABLE 3 Termination Options:-	
SELECT OPTION	DESCRIPTION
A	J Foot bulk packed
B	J Foot tape and reel
C	Gull Wing bulk packed
D	Gull Wing tape and reel

## ORDERING INFORMATION

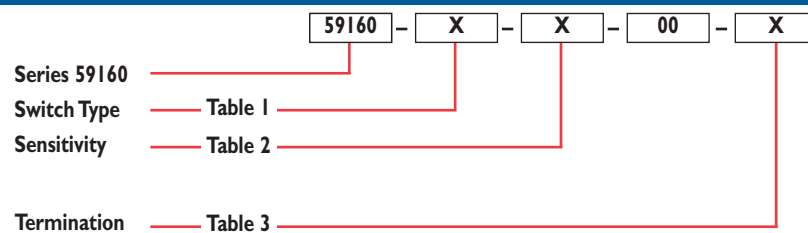

Hamlin USA Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales.us@hamlin.com  
 Hamlin UK Tel: +44 (0) 1379 649700 • Fax: +44 (0) 1379 649702 • Email: sales.uk@hamlin.com  
 Hamlin Germany Tel: +49 (0) 6181 953660 • Fax: +49 (0) 6181 953666 • Email: sales.de@hamlin.com  
 Hamletrol France Tel: +33 (0) 1 4687 0202 • Fax: +33 (0) 1 4686 6786 • Email: sales.fr@hamlin.com

DETAILS PROVIDED ON THIS DATA SHEET ARE PROVIDED FOR INFORMATION PURPOSES ONLY AND SHOULD NOT BE RELIED UPON AS BEING ACCURATE FOR ANY PARTICULAR PURPOSE. Product performance may be affected by the application to which the product is put. Upon request, HAMLIN will assist purchasers by providing information specific to any particular application. HAMLIN disclaims any and all liability whatsoever for any purchaser's reliance upon the information contained on this data sheet without further consultation with authorised representatives of HAMLIN.