

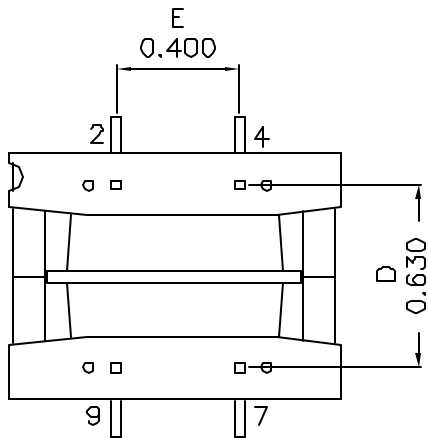
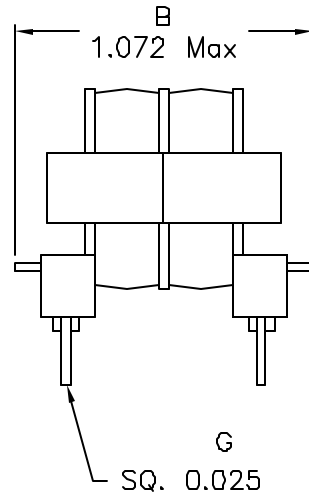


### 1. Mechanical Dimenisons:

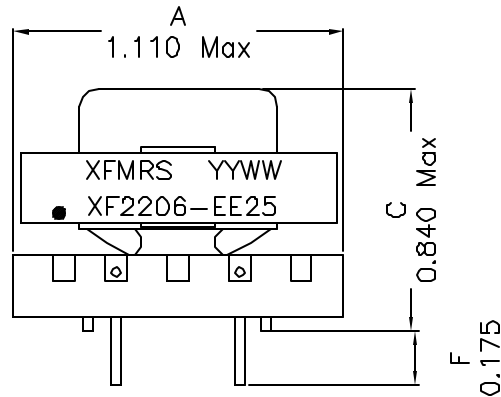

(BOTTOM VIEW)

### 2. Schematic:

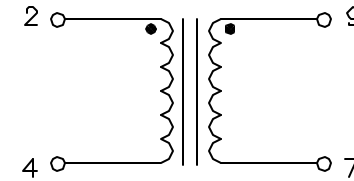

### 3. Electrical Specifications:

- OCL: 220uH Min @1KHz 1V, Each Wdg
- LL: Pins 2-4 7.75uH Max @100KHz 0.1V,  
Short Pins 9-7
- CW/W: Pins 2-9 10.0pF Max @100KHz 0.1V
- DC Res.: 0.023 Ohms Max, Each Wdg
- Rated Current: 4.5Arms
- HIPOT: 2000Vac Pri to Sec
- Q: Pins 2-4 tbd Min @10KHz 1V

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen Index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

DOC REV: A/1

**PROPRIETARY**

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

<b>XFMRS Inc</b>	Title: <b>Common Mode Choke</b>		
	UNLESS OTHERWISE SPECIFIED		P/N: XF2206-EE25
TOLERANCES: .xxx ±0.010 Dimensions in IN.	DWN.	Kang Chen	REV. A May-20-04
	CHK.	YK Liao	May-20-04
SHEET 1 OF 1	APP.	J Ng	May-20-04