


NETWORKING SOCKETS

MODULAR SOCKET - MINI LOW PROFILE

- Very competitively priced
- Mini low profile
- Industry standard footprint
- 4, 6 and 8 way side entry
- UL approved

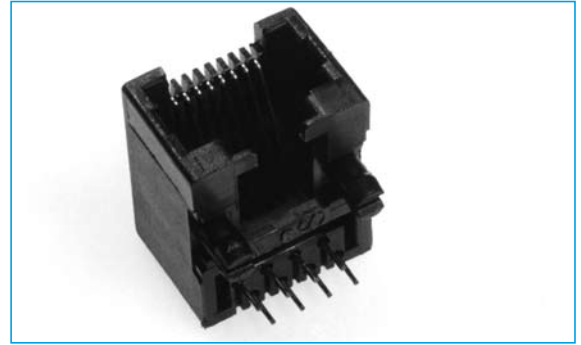

SPECIFICATION

Material

Housing:


PBT Polyester, UL94V-O; UL94V-2
Standard colour grey

Contacts:


.0177(.45mm) diameter
Pros - bronze plated with hard gold
Cavity conforms to FCC Rules and
Regulations Part 68, subpart F

OUTLINE DRAWING



PC Board Layout 8x8

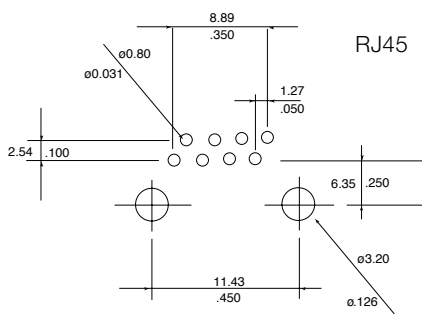

PC Board Layout 6x4, 6x6

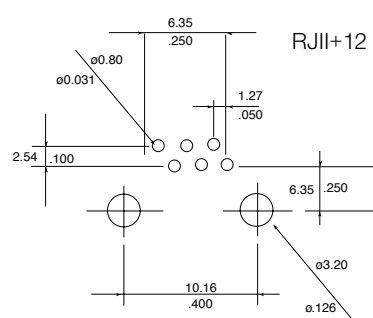

PC Board Layout 4x2, 4x4

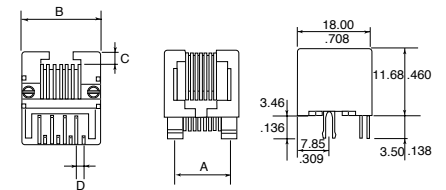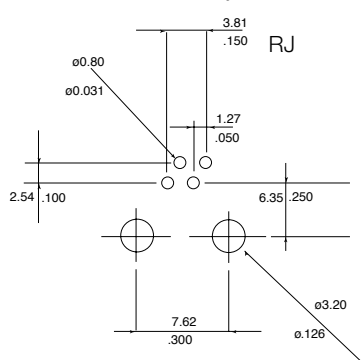

Circuits	Loaded Contacts	Dimensions			
		A	B	C	D
4	2	7.62 (.300)	11.18 (.440)	2.60 (.102)	1.27 (.050)
4	4	7.62 (.300)	11.18 (.440)	2.60 (.102)	1.27 (.050)
6	4	10.16 (.400)	13.20 (.520)	2.60 (.102)	1.27 (.050)
6	6	10.16 (.400)	13.20 (.520)	2.60 (.102)	1.27 (.050)
8	8	11.43 (.450)	15.24 (.600)	2.60 (.102)	1.27 (.050)

ORDERING INFORMATION

DBC	RJ45	S	88	B
Dubilier Connectors	Series	Contact Type	N° of Ways x N° of Loaded Contacts	Style
	RJ	S=Socket	4x2	B=Mini Low profile Skt
	RJ		4x4	
	RJ11		6x4	
	RJ12		6x6	
	RJ45		8x8	