



LOW INPUT CURRENT A.C. INPUT PHOTOTRANSISTOR OPTICALLY COUPLED ISOLATORS

APPROVALS

- UL recognised, File No. E91231

DESCRIPTION


The TLP626, TLP626-2, TLP626-4 series of optically coupled isolators consist of two infrared light emitting diodes connected in inverse parallel and NPN silicon photo transistors in space efficient dual in line plastic packages.

FEATURES


- Options :-
10mm lead spread - add G after part no.
Surface mount - add SM after part no.
Tape&reel - add SMT&R after part no.
- Low input current $\pm 0.5\text{mA}$ I_F
- High Isolation Voltage ($5.3\text{kV}_{\text{RMS}}$, 7.5kV_{PK})
- AC or polarity insensitive input
- All electrical parameters 100% tested
- Custom electrical selections available

APPLICATIONS




- Computer terminals
- Industrial systems controllers
- Telephone sets, Telephone exchangers
- Signal transmission between systems of different potentials and impedances

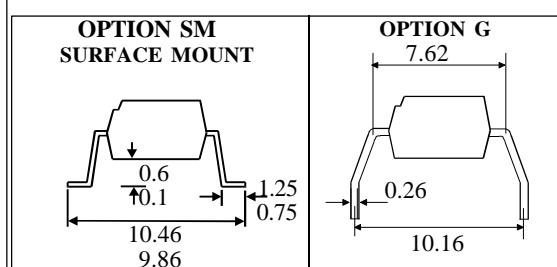





TLP626







Dimensions in mm



TLP626-2

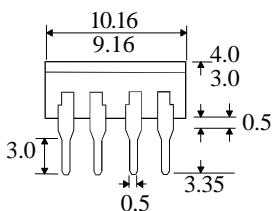

TLP626-4

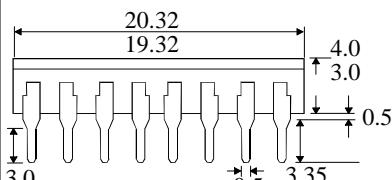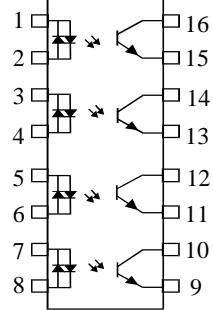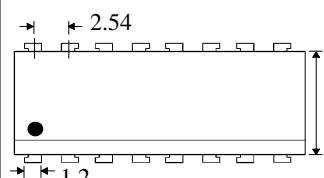

ISOCOM COMPONENTS LTD

Unit 25B, Park View Road West,
Park View Industrial Estate, Brenda Road
Hartlepool, Cleveland, TS25 1YD
Tel: (01429) 863609 Fax : (01429) 863581

ABSOLUTE MAXIMUM RATINGS
(25°C unless otherwise specified)

Storage Temperature	—	-55°C to + 125°C
Operating Temperature	—	-55°C to + 100°C
Lead Soldering Temperature (1/16 inch (1.6mm) from case for 10 secs)		260°C

INPUT DIODE

Forward Current	—	$\pm 50\text{mA}$
Power Dissipation	—	70mW

OUTPUT TRANSISTOR

Collector-emitter Voltage BV_{CEO}	—	55V
Emitter-collector Voltage BV_{ECO}	—	6V
Power Dissipation	—	150mW

POWER DISSIPATION

Total Power Dissipation	—	200mW
(derate linearly 2.67mW/°C above 25°C)		


ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise noted)

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V_F)	1.0	1.15	1.3	V	$I_F = \pm 10\text{mA}$
Output	Collector-emitter Breakdown (BV_{CEO}) (Note 2)	55			V	$I_C = 0.5\text{mA}$
	Emitter-collector Breakdown (BV_{ECO})	6		100	V nA	$I_E = 100\mu\text{A}$
	Collector-emitter Dark Current (I_{CEO})					$V_{\text{CE}} = 24\text{V}$
Coupled	Current Transfer Ratio (CTR) (Note 2) Low Input CTR	100 50		1200	% %	$\pm 1\text{mA} I_F, 0.5\text{V} V_{\text{CE}}$ $\pm 0.5\text{mA} I_F, 1.5\text{V} V_{\text{CE}}$
	Collector-emitter Saturation Voltage $V_{\text{CE(SAT)}}$		0.2	0.4	V V	$\pm 1\text{mA} I_F, 0.5\text{mA} I_C$ $\pm 1\text{mA} I_F, 1\text{mA} I_C$
	Input to Output Isolation Voltage V_{ISO}	5300 7500			V_{RMS} V_{PK}	See note 1 See note 1
	Input-output Isolation Resistance R_{ISO}	5×10^{10}			Ω	$V_{\text{IO}} = 500\text{V}$ (note 1)
	Rise Time t_r		8		μs	$V_{\text{CC}} = 10\text{V}$,
	Fall Time t_f		8		μs	$I_C = 2\text{mA}, R_L = 100\Omega$
	Turn-on Time t_{on}		10		μs	
	Turn-off Time t_{off}		8		μs	


Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory.


Collector Power Dissipation vs. Ambient Temperature

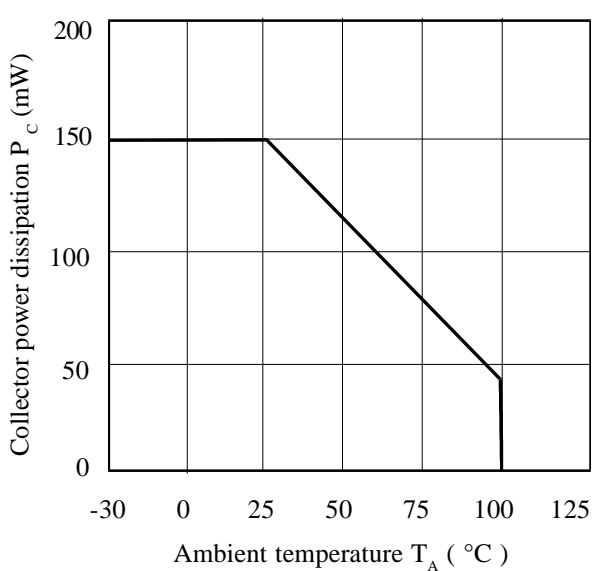


Relative Current Transfer Ratio vs. Ambient Temperature

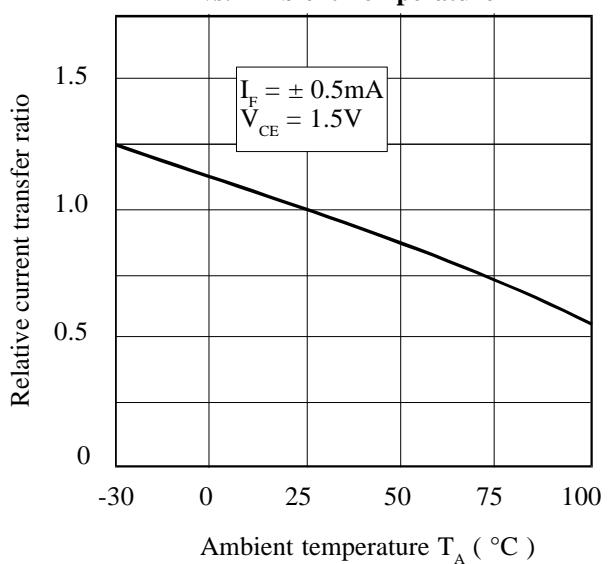


Forward Current vs. Ambient Temperature

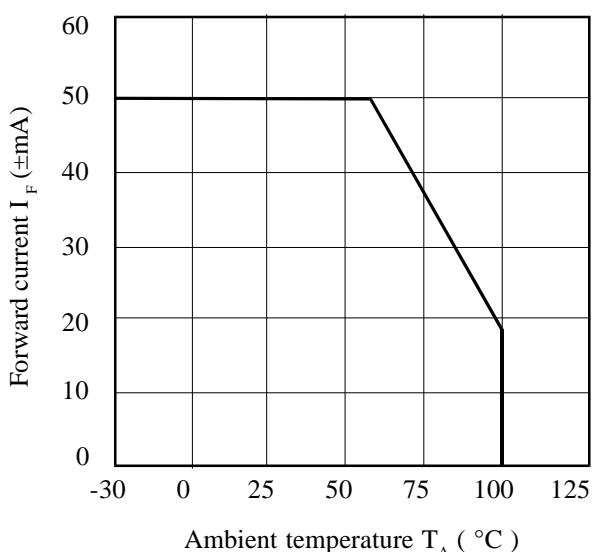

Relative Current Transfer Ratio vs. Forward Current

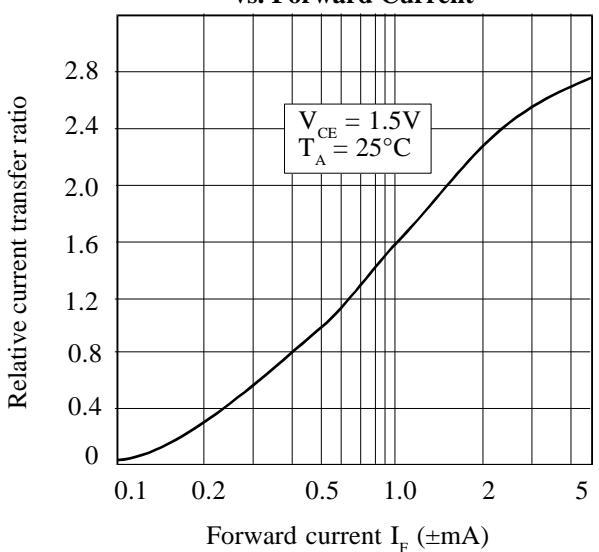

Relative Current Transfer Ratio vs. Ambient Temperature

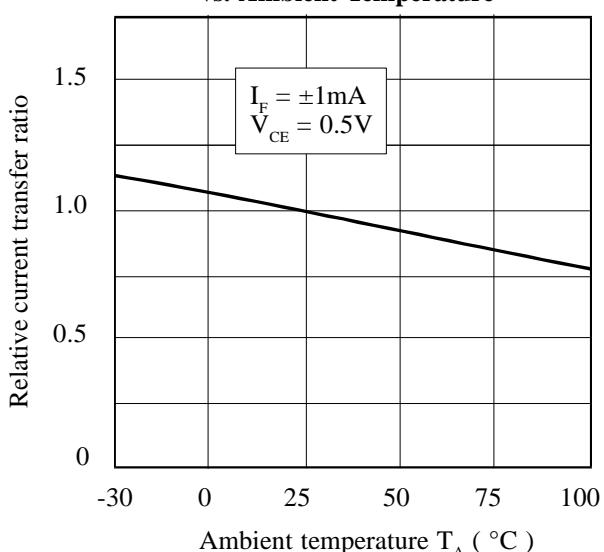

Relative Current Transfer Ratio vs. Forward Current

