

Features

- Uses wiring-easy terminal block.
- General purpose model made with ferrite core.
- Bleed resistor for electric shock protection.


Applications

- Thyristor-applied systems, Fax machines, Game machines, Various control systems and etc.




Safety Agency : Standard		File No.
UL	: UL-1283	E78644
C-UL	: C22.2, NO.8-M1986	E78644
TÜV	: EN133200	R2-50006831


Dimensions (5~30A)

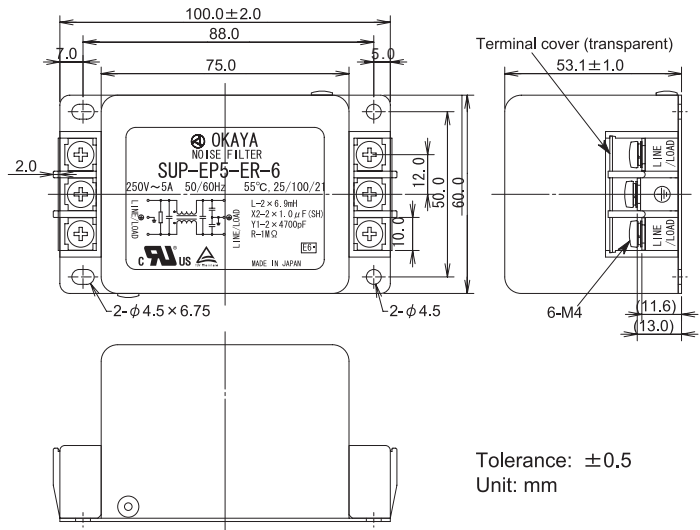

Static characteristics

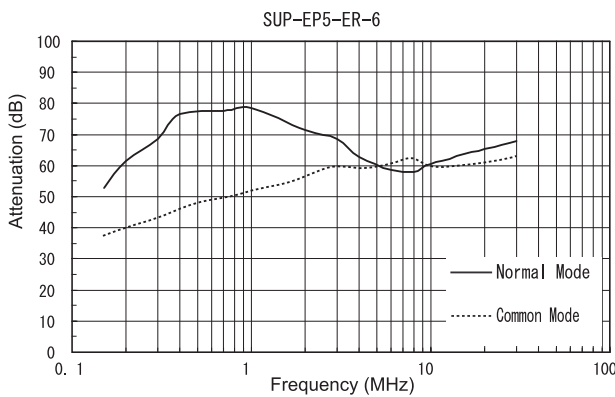

Circuit (5~30A)

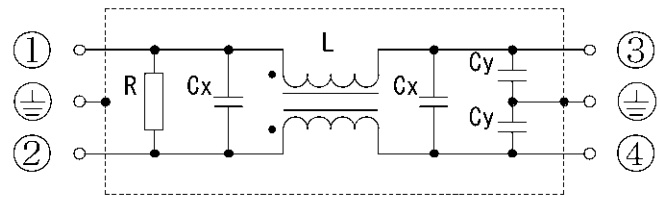

Electrical Specifications

Rated Voltage **250VAC**

Safety Agency	Model Number	Rated Current (A)	Test Voltage	Insulation Resistance	Leakage Current (max)	Voltage Drop (max)	Temperature Rise (max)	Operating Temperature (°C)	Insertion losses	
									Normal Mode (MHz)	Common Mode (MHz)
	SUP-EP5-ER-6	5	Line to Ground 250Vrms 50/60Hz 60sec	Line to Ground 100MΩmin (at 500V _{DC})	1mA (at 250Vrms 60Hz)	1.0Vrms	45K	-25 ~ +50	0.15 ~ 30	0.3 ~ 20
	SUP-EP10-ER-6	10							0.15 ~ 30	0.4 ~ 20
	SUP-EP15-ER-6	15							0.2 ~ 30	0.7 ~ 20
	SUP-EP20-ER-6	20							0.3 ~ 30	2.0 ~ 30
	SUP-EP30-ER-6	30							0.4 ~ 30	6.0 ~ 30

Guaranteed attenuation is more than 30dB in normal and common mode.