**MABACT00** 

# 1:1 Flux Coupled Transformer

Rev C


## 3 - 200 MHz


## Features:

- Surface Mount
- 1:1 Impedence
- CT on Secondary
- Available on tape & reel

#### **Description**

M/A-COM's MABACT0012 is a 1:1 RF flux coupled transformer in a low cost, surface mount package. Ideally suited for high volume CATV/Broadband applications.

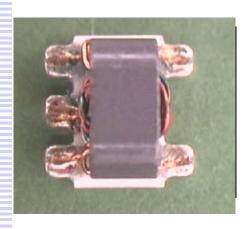

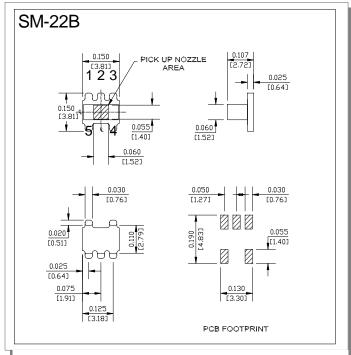

Dimensions in inches [mm]

Tolerance: .xx ± .02, .xxx ± .010

## **Ordering Information**

Part Number	Package
MABACT0012	Tape & Reel

## Electrical Specifications: 25°C, Impedance = 75 Ohms

•	•				
Parameter	Frequency (MHz)	Units	Minimum	Typical	Maximum
Frequency Range	3 - 200				
Insertion Loss	3 - 200	dB	-	0.8	1.5
Amplitude Unbalance	3-50	dB	-	-	0.1
Amplitude Unbalance	3-200	dB	-	-	0.5
Phase Unbalance	3-50	0	-	-	1
Phase Unbalance	50-200	0	-	-	5
Input Return Loss	3-200	dB	-	-	10
Input Return Loss	5-120	dB	-	-	15

1


## **Absolute Maximum Ratings**

Parameter	Maximum
RF input power	250mW
DC current	30mA
Operating temperature	-40°C - +85°C
Storage temperature	-40°C - +85°C


#### **Pin Configuration**

Function	Pin #
Secondary	3
Secondary CT	2
Secondary Dot	1
Primary Dot	5
Primary	4


#### **Schematic**




#### **Insertion Loss Port**

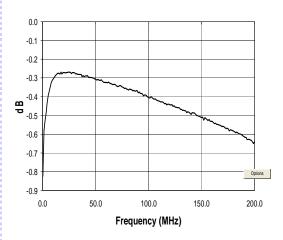


#### **Phase Balance**

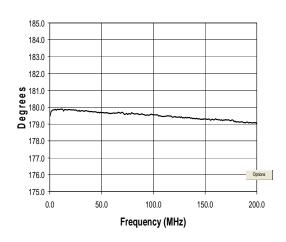

## **Amplitude Unbalance**

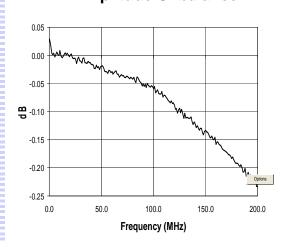

#### Input Return Loss

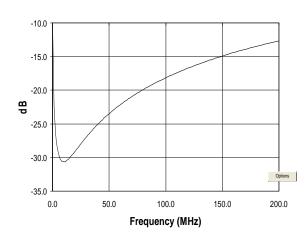

- ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
- **PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.
- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400