


Product Picture:

Product P/N: T8_X-220V-1214-S



Color Code(X)	
Color	Code
Pure White	W6
Warm White	W3
Red	R
Green	G
Blue	B
Yellow	Y

Product Dimension Characteristics

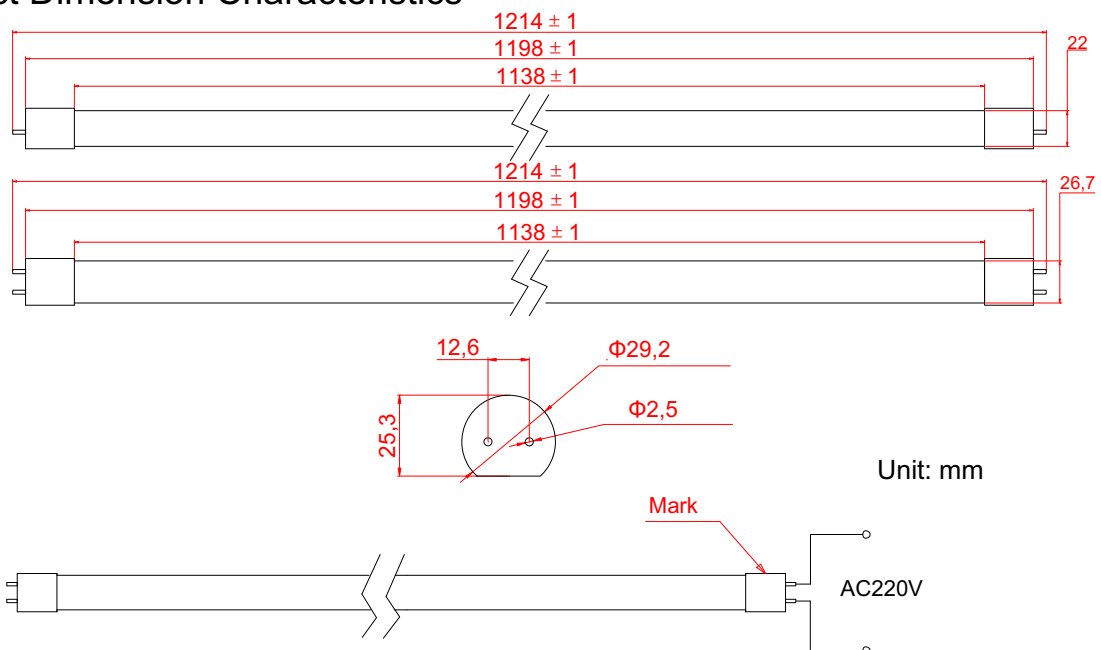


Notes

1. Warning: prevent link electronic ballast and inductive ballast
2. Tolerance is ± 0.3 mm unless otherwise specified.
3. Ac input method: Single-ended input

Features:

1. Emitted Color : Red、Green、Blue、Yellow、Pure White、Warm White
2. Super energy saving and Environmental protection
3. Soft light, pure spectrum could protect to the eyesight
4. Life of the product is much longer than Traditional fluorescent lamp
5. The product does not need to use electronic ballast and starter
6. Choices of illuminous intensities for indoor and outdoor application
7. Lifetime of the product is more than 30000 hours
8. Operating Temperature Range: $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$



Typical Electrical Characteristics


Parameter	Symbol	Min.	Typ.	Max.	Unit
Input Voltage (AC)	V_{in}	210	220	240	V
Power Dissipation	P_d	12	18	20	W

Optical Characteristics(Ta=25°C)

Emitting Color	Wavelength	Luminous Flux(LM) Type	Viewing Angle(θ)
Pure White	5000K-6000K	500	120
Warm White	3000k-5000K	450	120
Red	625nm	100	120
Green	525nm	340	120
Blue	470 nm	120	120
Yellow	590nm	100	120

The Rules For Naming

T8_X_220V - 1214 - S

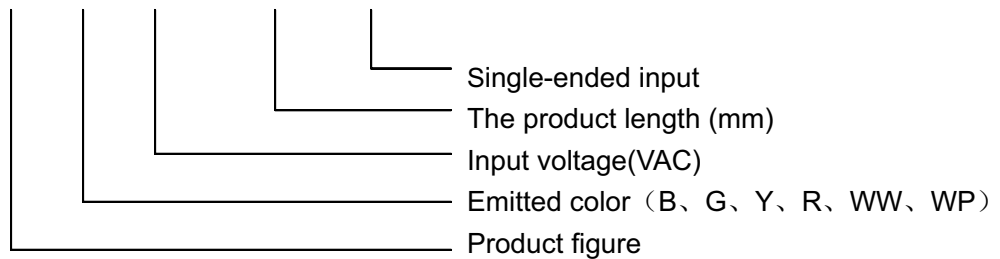

Product Packaging Picture



35X30X1220 unit: mm

1PCS in this box



180X95X1222 unit: mm

15 PCS in this box