

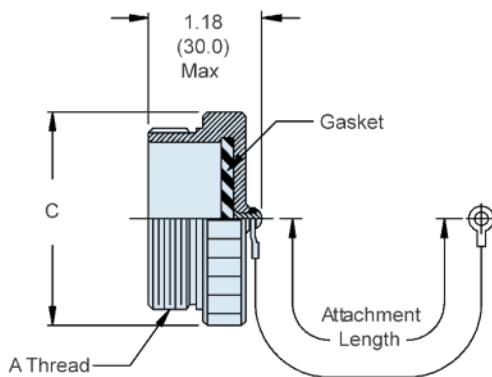


660-049 • 660-050
Composite MIL-DTL-38999 Series III
Threaded Protective Covers

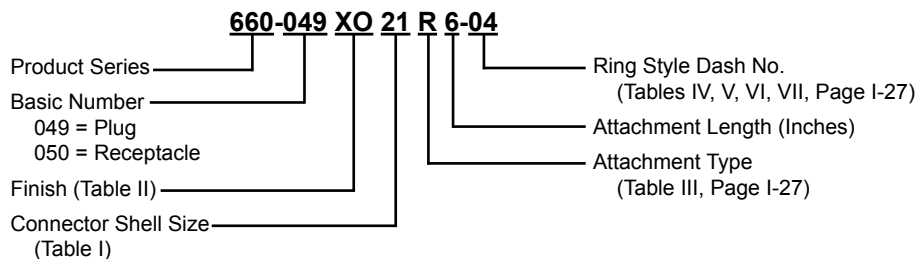

660-049
MIL-C-38999/32 PLUG COVER

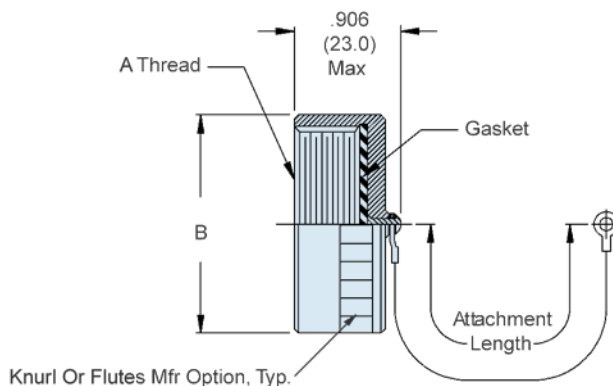

660-050
MIL-C-38999/33 RECEPTACLE COVER

TABLE I: CONNECTOR SHELL SIZE

Shell Size	A Thread	B Dia Max	C Dia Max
09	.6250-0.1P-0.3L-TS	.906 (23.0)	.990 (25.1)
11	.7500-0.1P-0.3L-TS	1.024 (26.0)	1.105 (28.1)
13	.8750-0.1P-0.3L-TS	1.220 (31.0)	1.235 (31.4)
15	1.0000-0.1P-0.3L-TS	1.300 (33.0)	1.290 (32.8)
17	1.1875-0.1P-0.3L-TS	1.457 (37.0)	1.460 (37.1)
19	1.2500-0.1P-0.3L-TS	1.575 (40.0)	1.560 (39.6)
21	1.3750-0.1P-0.3L-TS	1.732 (44.0)	1.680 (42.7)
23	1.5000-0.1P-0.3L-TS	1.811 (46.0)	1.810 (46.0)
25	1.6250-0.1P-0.3L-TS	1.969 (50.0)	2.050 (52.1)

TABLE III: FINISH

SYM	MATERIAL	FINISH
XM	Composite	Electroless Nickel
XW	Composite	Cadmium Olive Drab over Electroless Nickel
XB	Composite	No Plating - Black Material
XO	Composite	No Plating - Base Material Non-Conductive