


70 MHz Bandpass SAW Filter

4.5 MHz Bandwidth



BP60300

Specifications					
Parameter	Sym	Minimum	Typical	Maximum	Unit
Center Frequency at 25°C	fc	69.91	70	70.09	MHz
Insertion Loss at fc	IL	-	24.1	26.0	dB
1 dB Bandwidth	BW ₁	4.0	4.2	-	MHz
3 dB Bandwidth	BW ₃	4.5	4.7	-	MHz
40dB Bandwidth	BW ₄₀	-	6.7	6.9	MHz
Passband Variation	-	-	0.3	0.8	dB
Phase Linearity	-	-	2.0	4.0	Deg
Group Delay Variation	-	-	60	90	nsec
Absolute Delay	-	-	3.0	-	μsec
Ultimate Rejection	-	50	60	-	dB
Substrate Material	-	-	112-LiTaO ₃	-	-
Ambient Temperature	T _a	-	25	-	°C
Operating Temperature Range	T _o	-55	25	85	°C

Typical Performance

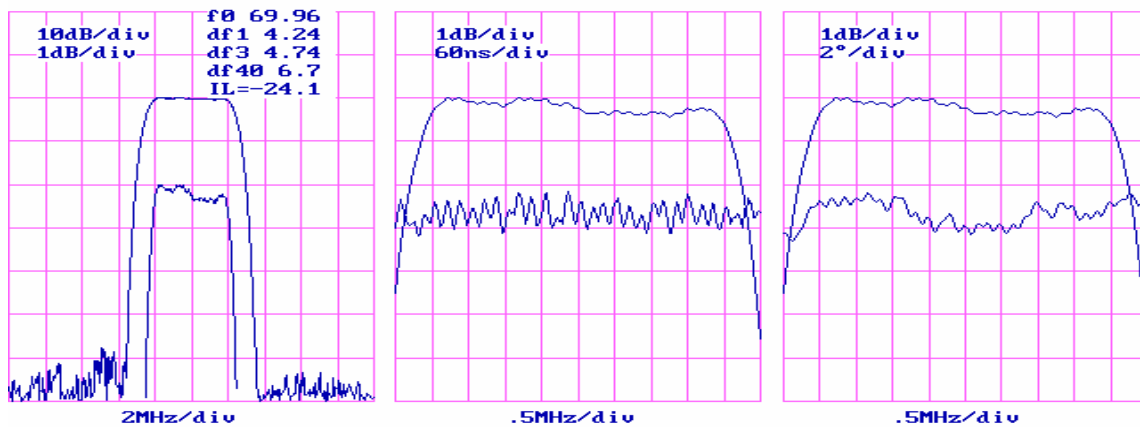

Package Outline **Matching Configuration**

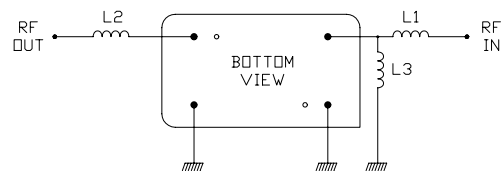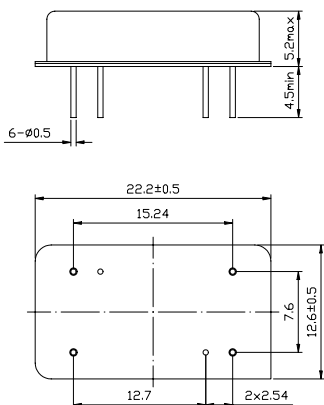

L1 : 230 nH L2 : 110 nH
 L3 : 270 nH
 Nominal Source/Load Impedance : 50 Ω