


TERMINAL BLOCKS

- 5.00mm pitch
- Professional rising clamp
- Designed to prevent cable entry below clamp
- 2.5mm² wire acceptance
- Rating 20A/250V
- UL/CE approved
- Colour green
- Interlocking

5mm PITCH VERTICAL MOUNT

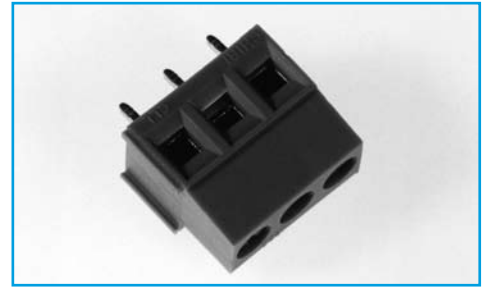


SPECIFICATION

Rating: 20A/250Volts
Dielectric Strength: >2.5KV
Insulation Resistance: >5MΩ
Working temperature: -20°C to 125°C
Short Period: 160°
Moulding: UL94V-0 flame retardant nylon 66

Pin/terminal: 5 micron tinned nickel plated brass
Rising clamp: Nickel plated brass
Screw/torque: M3 Zinc Steel / 0.2Nm, colour passivated and tropicalised
Recommended PCB hole size: ø1.3mm²

OUTLINE DRAWING

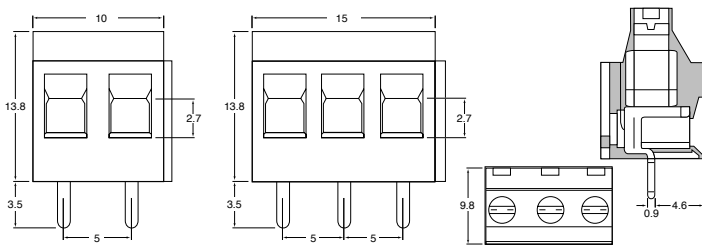

ORDERING INFORMATION

DBC	TB	16	/2
Dubilier Connectors	Series Terminal Block	Style	N ^o of Ways
			2 = 2 ways 3 = 3 ways

TERMINAL BLOCKS

- 5mm Pitch
- Professional Rising Clamp
- 2 -12 pole interlocking
- 2.5mm² wire acceptance
- UL/CE/VDE approved
- Colour Green

5MM PITCH RISING CLAMP




SPECIFICATION

Electrical Characteristics

Rating Current: 20A/250V
Contact Resistance: ≥2.5kV/60secs
Insulation Resistance: ≥5MΩ
Operating Temperature: -20°C to +125°C
Short period: 160°C
Moulding: UL94-V0 flame retardant PA66

Pin/terminal: 5µ tinned, nickel plated brass
Wire clamp: Nickel plated brass
Screw/torque: M3 steel, 6µ zinc colour passivated and tropicalised/0.5Nm
Recommended PCB hole size: ø1.3mm

OUTLINE DRAWING



ORDERING INFORMATION

DBC	TB	42	/2
Dubilier Connectors	Series Terminals Blocks	Style	No of Ways
			2 = 2ways 3 = 3ways

* other number of ways are available
Please consult the office for further details