

IDC

- Industry compatible
- Competitively priced
- Gold plated contacts
- 1.27mm pitch
- 2.54mm row spacing

BOX HEADER STRAIGHT





SPECIFICATION

Material & Finish

- Contact Material:** Brass
- Insulator Material:** PBT & Glass-Fibre Reinforced UL-94V-0
- Current Rating:** 1 A DC
- Contact Resistance:** 30M Ω Max
- Insulator Resistance:** 1000M Ω Min
- Dielectric Withstanding Voltage:** 250V AC for One Minute
- Operating Temperature:** -40°C to + 105°C

Position	A	B
10	13.95	5.08
20	20.30	11.43
30	26.65	17.78
40	33.00	24.13
50	39.35	30.48
60	45.70	36.83
70	52.05	43.18
80	58.40	49.53
90	64.75	55.88
100	71.50	62.33

OUTLINE DRAWING

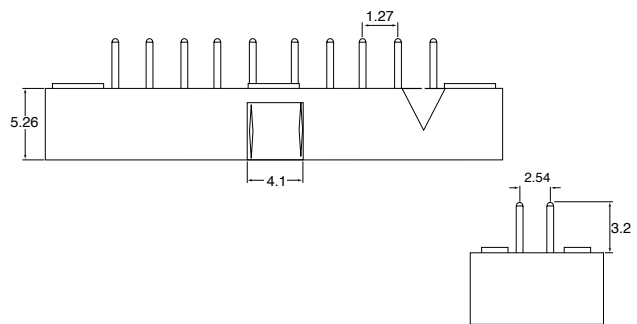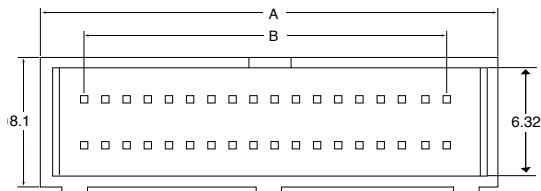

ORDERING INFORMATION

DBC	IDC	C7	10	B	S	1
Dubilier Connectors	IDC Connector	Series	N° of Ways	Contact Material	Contact Plating	Colour
			10=10way	B=Brass	S=Selective Gold	1=Black
			20=20way			
			30=30way			
			40=40way			
			50=50way			
			60=60way			
			70=70way			
			80=80way			
			90=90way			
			100=100way			

SECTION 15