

## 35 AMP HIGH FREQUENCY SOFT RECOVERY BRIDGE RECTIFIERS


### FEATURES

- TRUE SOFT RECOVERY CHARACTERISTIC WITH NO RINGING, SPIKES, or OVERSHOOT
- HIGH FREQUENCY: 250 kHz  
FAST RECOVERY: 100nS - 150nS
- UNMATCHED PERFORMANCE - Minimal RFI/EMI  
Reduced Power Losses, Extremely Cool Operation  
Increased Power Supply Efficiency
- VOID FREE Vacuum Die Soldering For Maximum Mechanical Strength And Heat Dissipation  
(Solder Voids: Typical < 2%, Max. < 10% of Die Area)
- Proprietary *SOFT GLASS* Junction Passivation For Superior Reliability and Performance
- Wide Range of Applications - Inverters, Converters Choppers, Power Supplies, etc.
- **UL RECOGNIZED - FILE #E141956**
- **RoHS COMPLIANT**

### MECHANICAL DATA

- Case: Case: Molded epoxy with integral heat sink  
Epoxy carries a U/L Flammability rating of 94V-0
- Terminals: Round silver plated copper pins or fast-on terminals
- Soldering: Per MIL-STD 202 Method 208 guaranteed
- Polarity: Marked on side of case
- Mounting Position: Any. Through hole for #8 screw.  
Max. mounting torque = 20 in-lb.
- Weight: Fast-on Terminals - 0.7 Ounces (20.0 Grams)  
Wire Leads - 0.55 Ounces (16.0 Grams)

### MECHANICAL SPECIFICATION

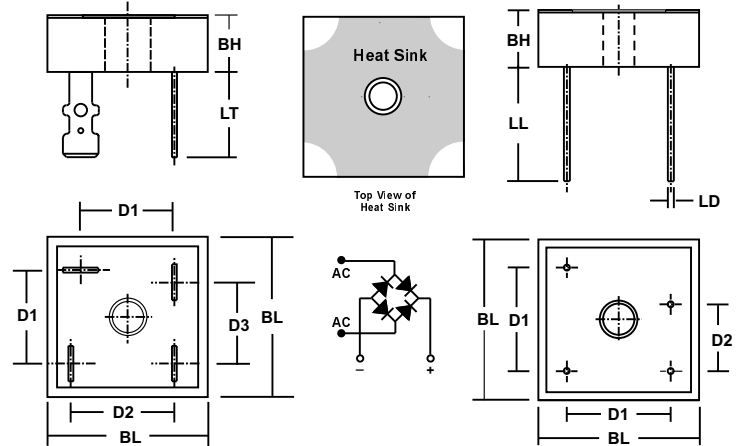

SYM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
BL	28.4	28.7	1.12	1.13
BH	9.6	9.8	0.38	0.39
D1	15.7	16.7	0.62	0.66
D2	17.5	18.5	0.69	0.73
D3	13.5	14.5	0.53	0.57
LT	n/a	15.2	n/a	0.6

Use Suffix "T" For  
FAST-ON TERMINALS

EXAMPLE P/N: DB3506P/T-S

SYM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
BL	28.4	28.7	1.12	1.13
BH	9.6	9.8	0.38	0.39
D1	17.5	18.5	0.69	0.73
D2	10.9	11.9	0.43	0.47
LL	20.6	n/a	0.81	n/a
LD	1.0	1.1	0.039	0.042

Use Suffix "W" For  
WIRE LEADS

EXAMPLE P/N: DB3506P/W-S

### MAXIMUM RATINGS & ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

PARAMETER (TEST CONDITIONS)	SYMBOL	RATINGS					UNITS
		DB 3500P-S	DB 3501P-S	DB 3502P-S	DB 3504P-S	DB 3506P-S	
Series Number							
Maximum DC Blocking Voltage	V <sub>RM</sub>	50	100	200	400	600	VOLTS
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	
Maximum Peak Recurrent Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	
Average Forward Rectified Current, T <sub>c</sub> = 50 °C	I <sub>o</sub>	35					AMPS
Peak Forward Surge Current (8.3mS single half sine wave superimposed on rated load)	I <sub>FSM</sub>	400					
Maximum Forward Voltage, Per Diode, at 17.5 Amps DC	V <sub>FM</sub>	1.2					VOLTS
Maximum Average DC Reverse Current at Rated DC Blocking Voltage Per Diode	I <sub>RM</sub>	1.0					A
		@ T <sub>A</sub> = 125 °C					
Maximum Reverse Recovery Time	T <sub>RR</sub>	150 (Typ. 100)					nS
Typical Thermal Resistance, Junction to Case	R <sub>θJC</sub>	1.2					°C/W
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150					°C

NOTES: (1) Bolt bridge on heat sink with #8 screw, using silicon thermal compound between bridge and mounting surface