

IDC

BOX HEADER STRAIGHT

- Industry compatible
- Competitively priced
- Gold plated contacts
- 2.00 mm pitch





SPECIFICATION

Material & Finish

- Contact Material:** Brass
- Insulator Material:** PBT & Glass-Fibre Reinforced UL-94V-0
- Current Rating:** 1 A DC
- Contact Resistance:** 30M Ω Max
- Insulator Resistance:** 3000M Ω Min
- Dielectric Withstanding Voltage:** 250V AC for One Minute
- Operating Temperature:** -40°C to + 105°C

Position	A	B
10	16.00	8.00
12	18.00	10.00
14	20.00	12.00
16	22.00	14.00
20	26.00	18.00
26	32.00	24.00
30	36.00	28.00
34	40.00	32.00
36	42.00	34.00
40	46.00	38.00
44	50.00	42.00
50	56.00	48.00
68	74.00	66.00

OUTLINE DRAWING

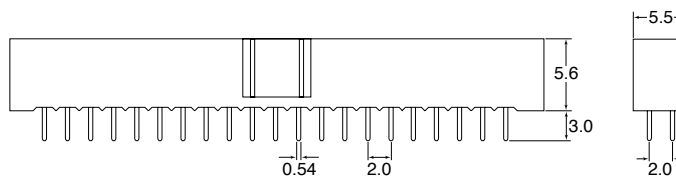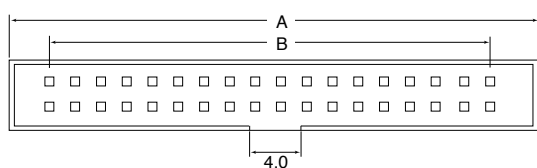

SECTION 15

ORDERING INFORMATION

DBC	IDC	C5	10	A	G	1
Dubilier Connectors	IDC Connector	Series	N° of Ways	Contact Material	Contact Plating	Colour
			10=10way 12=12way 14=14way 16=16way 20=20way 24=24way 26=26way	A=Brass	G= Gold Flash	1=Black
			30=30way 34=34way 36=36way 40=40way 44=44way 50=50way 68=68way			