



S5A THRU S5M

5.0 AMPS. Surface Mount Rectifiers



Voltage Range
50 to 1000 Volts
Current
5.0 Amperes


Features

- ✧ For surface mounted application
- ✧ Glass passivated junction chip.
- ✧ Low forward voltage drop
- ✧ High current capability
- ✧ Easy pick and place
- ✧ High surge current capability
- ✧ Plastic material used carries Underwriters Laboratory Classification 94V-O
- ✧ High temperature soldering:
260°C / 10 seconds at terminals

Mechanical Data

- ✧ Case: Molded plastic
- ✧ Terminals: Solder plated
- ✧ Polarity: Indicated by cathode band
- ✧ Packaging: 16mm tape per EIA STD RS-481
- ✧ Weight: 0.21 gram

SMC/DO-214AB

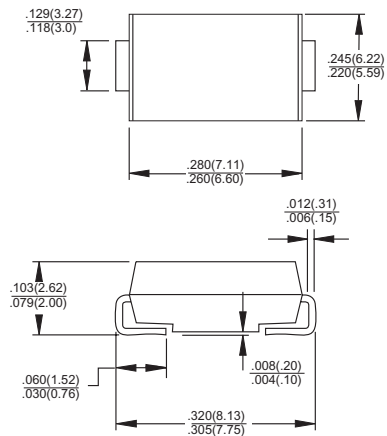

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

| Type Number | Symbol | S5A | S5B | S5D | S5G | S5J | S5K | S5M | Units |
|--|--|-------------|-----|-----|-----|-----|-----|------|--------------------------------|
| Maximum Recurrent Peak Reverse Voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS Voltage | V_{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC Blocking Voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum Average Forward Rectified Current @ $T_L = 75^\circ\text{C}$ (Note 1) | $I_{(AV)}$ | 5.0 | | | | | | | A |
| Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method) | I_{FSM} | 100 | | | | | | | A |
| Maximum Instantaneous Forward Voltage @ 5.0A | V_F | 1.15 | | | | | | | V |
| Maximum DC Reverse Current @ $T_A = 25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A = 125^\circ\text{C}$ | I_R | 10.0 250 | | | | | | | μA μA |
| Typical Thermal Resistance (Note 1) | $R_{\theta_{JL}}$ $R_{\theta_{JA}}$ | 13 47 | | | | | | | $^\circ\text{C}/\text{W}$ |
| Typical Junction Capacitance (Note 2) | C_j | 60 | | | | | | | pF |
| Operating Temperature Range | T_J | -55 to +150 | | | | | | | $^\circ\text{C}$ |
| Storage Temperature Range | T_{STG} | -55 to +150 | | | | | | | $^\circ\text{C}$ |

Notes: 1. Measured on P.C. Board with 0.6 x 0.6" (16 x 16mm) Copper Pad Areas.

2. Measured at 1 MHz and Applied $V_R = 4.0$ Volts

RATINGS AND CHARACTERISTIC CURVES (S5A THRU S5M)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

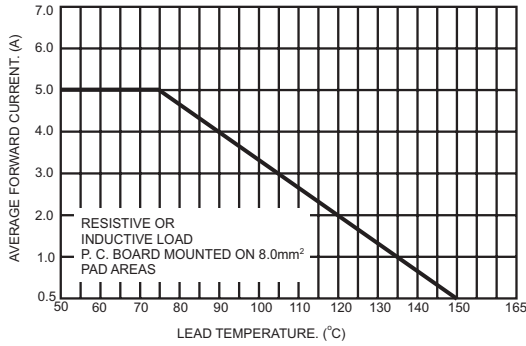


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

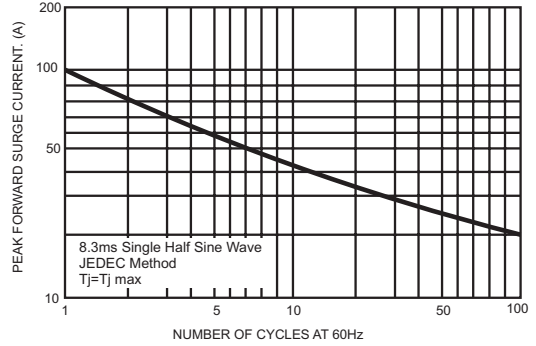


FIG.3- TYPICAL FORWARD CHARACTERISTICS

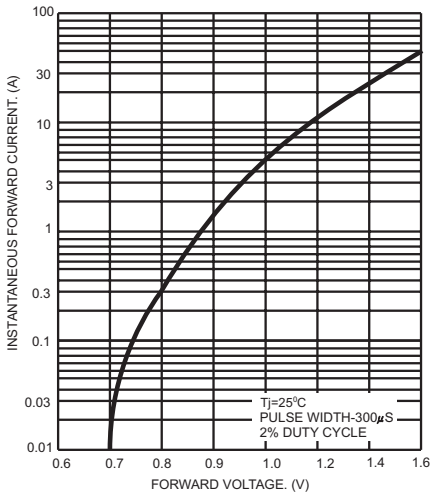


FIG.4- TYPICAL REVERSE CHARACTERISTICS

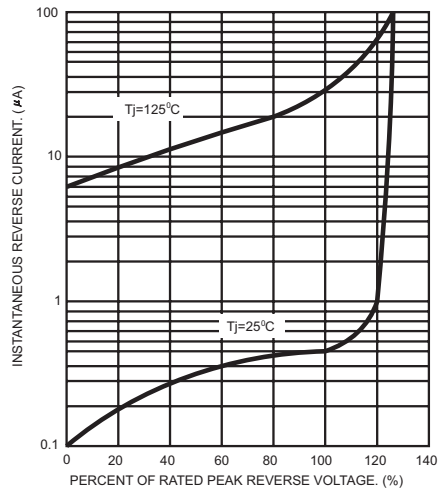


FIG.5- TYPICAL JUNCTION CAPACITANCE

