

# SRGPP3J

**GLASS PASSIVATED  
FAST RECOVERY RECTIFIER**  
VOLTAGE: 600V      CURRENT: 3.0A




## FEATURE

Molded case feature for auto insertion  
High Switching Capability  
Low leakage current  
High surge capability  
High temperature soldering guaranteed  
250°C /10sec/0.375" lead length at 5 lbs tension  
Glass Passivated chip

## MECHANICAL DATA

Terminal: Plated axial leads solderable per MIL-STD 202E, method 208C  
Case: Molded with UL-94 Class V-0 recognized Flame Retardant Epoxy  
Polarity: color band denotes cathode  
Mounting position: any

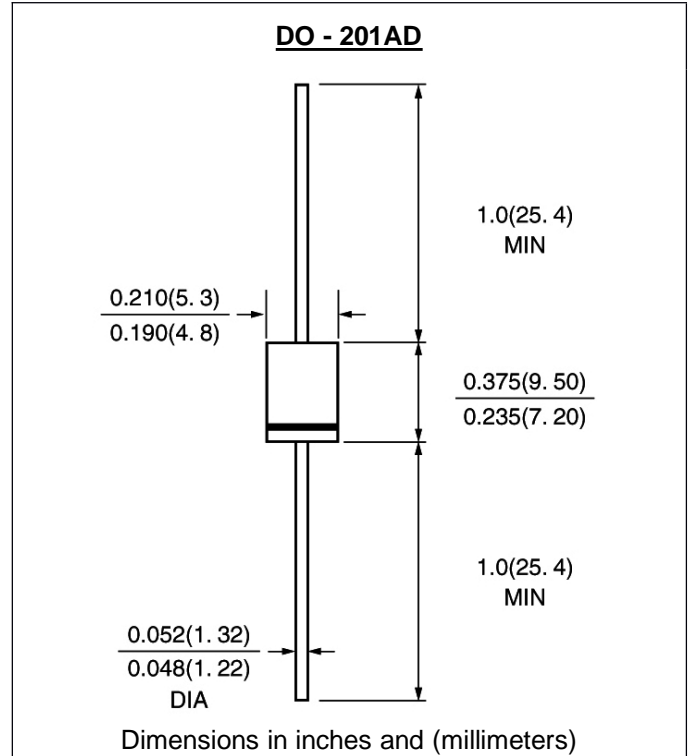

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	SYMBOL	SRGPP3J	units
Maximum Recurrent Peak Reverse Voltage	V <sub>rrm</sub>	600	V
Maximum RMS Voltage	V <sub>rms</sub>	420	V
Maximum DC blocking Voltage	V <sub>dc</sub>	600	V
Maximum Average Forward Rectified Current 3/8" lead length at T <sub>a</sub> =55°C	I <sub>f(av)</sub>	3.0	A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I <sub>fsm</sub>	125.0	A
Maximum Instantaneous Forward Voltage at rated forward current at I <sub>f(av)</sub> =3.5A	V <sub>f</sub>	1.3	V
Maximum full load reverse current full cycle at T <sub>L</sub> =75°C	I <sub>r(av)</sub>	30	μA
Maximum DC Reverse Current at rated DC blocking voltage T <sub>a</sub> =25°C T <sub>L</sub> =55°C	I <sub>r</sub>	5.0 100.0	μA μA
Typical Junction Capacitance (Note 1)	C <sub>j</sub>	50.0	pF
Maximum Reverse Recovery Time (Note 2)	T <sub>rr</sub>	90	nS
Storage and Operation Junction Temperature	T <sub>stg</sub> , T <sub>j</sub>	-55 to +150	°C

### Note:

1. Measured at 1.0 MHz and applied voltage of 4.0Vdc
2. Test Condition I<sub>f</sub> =0.5A, I<sub>r</sub> =1.0A, I<sub>rr</sub> =0.25A

# RATINGS AND CHARACTERISTIC CURVES SRGPP3J

1

