

IEC Appliance Outlet J, Screw-on Mounting, Front Side, Quick-connect Terminal

**Description**

- Panel Mount:
- Screw-on mounting, from front side
- Connector, Pin temperature 70 °C, Protection class I
- Quick connect terminals

**Approvals**

- VDE License Number: 40012242
- UL License Number: E57445
- CSA License Number: 1314981

**References**

[General Product Information](#)

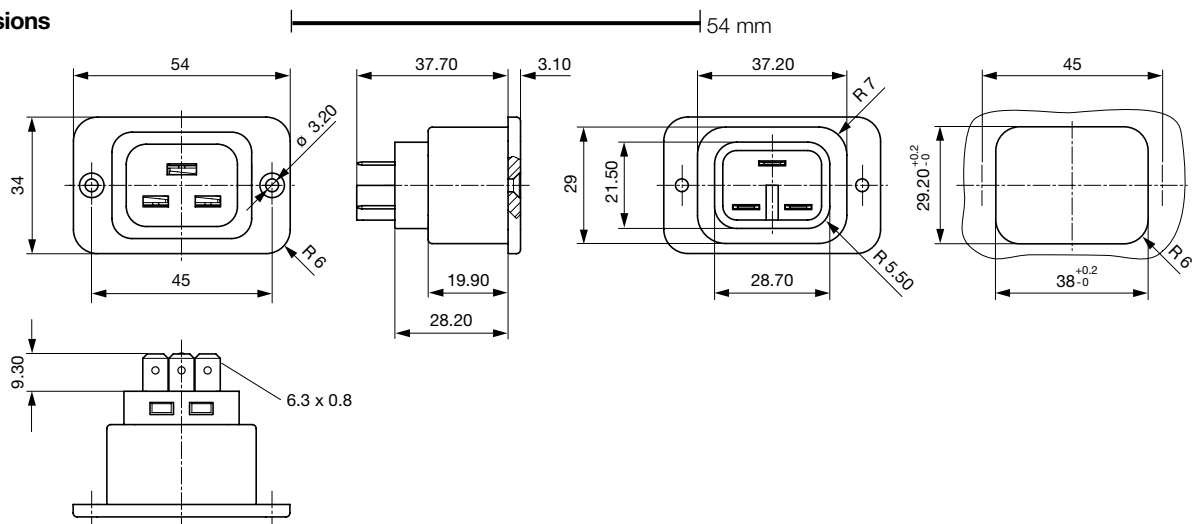
**Weblinks**

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Store](#), [Distributor-Stock-Check](#), [Accessories](#)

**Technical Data**

Ratings IEC	16 A / 250 VAC; 50 Hz
Ratings UL/CSA	21 A / 250 VAC; 60 Hz
Dielectric Strength	> 4 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50 Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 40 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class 1 acc. to IEC 61140
Terminal	Quick connect terminals
Material: Housing	UL 94V-0

Appliance Outlet	J acc. to IEC/EN 60320-2-2 UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 16A, Protection Class 1
------------------	---

**Dimensions**

length of the terminal please find at the order code configuration table  
Dimension "X" please ref. to table order code

## Config. Code

Product Configurator

5216 - H - A B C 0 - D - E

The characters are placeholders for the correspondingly keys of selections from the key tables.

### 5216 - H - A B C 0 - D - E = Type

Type	Configuration key
protection class 1	X

### 5216 - H - A B C 0 - D - E = Terminals

Terminal L	Configuration key
blade terminal (6,3x0,8mm) 	9

### 5216 - H - A B C 0 - D - E = Terminals

Terminal N	Configuration key
blade terminal (6,3x0,8mm)	9

Symbols similar as in table A

### 5216 - H - A B C 0 - D - E = Terminals

Terminal Ground	Configuration key
blade terminal (6,3x0,8mm)	9

Symbols similar as in table A

### 5216 - H - A B C 0 - D - E = Color

Color	Configuration key
jet black; RAL9005	A
silver grey; RAL7001	B
pure white; RAL9010	D

standard color: black

### 5216 - H - A B C 0 - D - E = Style

Style	Configuration key
flange with countersunk holes	1
flange with through holes	2

**Packaging unit** 50 Pcs

## Mating Inlets/Plugs

### Category / Description

[Plug Overview complete](#)



IEC Plug I, Cord Connector (Rewireable), Straight	0106
IEC Plug I, Cord Connector (Rewireable), Angled	1611
IEC Plug I, Cord Connector (Rewireable), Straight	1612
IEC Plug I, Cord Connector (Rewireable), Angled	4789
IEC Plug I, Cord Connector (Rewireable), Straight	4796

[Plug further types to 5216](#)