


## TERMINAL BLOCKS

- 5.00mm pitch
- Professional rising clamp
- 1.5mm<sup>2</sup> wire acceptance
- Rating 17.5A/250V
- UL/CE approved
- Interlocking
- Colour green


## SPECIFICATION

**Rating:** 17.5A/250Volts  
**Dielectric Strength:** >2KV  
**Insulation Resistance:** >5MΩ  
**Working temperature:** -20°C to 125°C  
**Short Period:** 160°  
**Moulding:** UL94V-0 flame retardant nylon 66

**Pin/terminal:** 5 micron tinned nickel plated brass  
**Rising clamp:** Nickel plated brass  
**Screw/torque:** M3 Zinc steel/0.5Nm colour passivated and tropicalised  
**Recommended PCB hole size:** ø1.3mm<sup>2</sup>

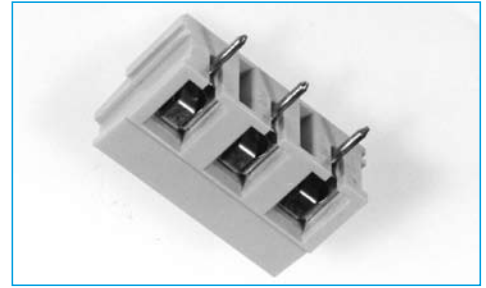

## OUTLINE DRAWING

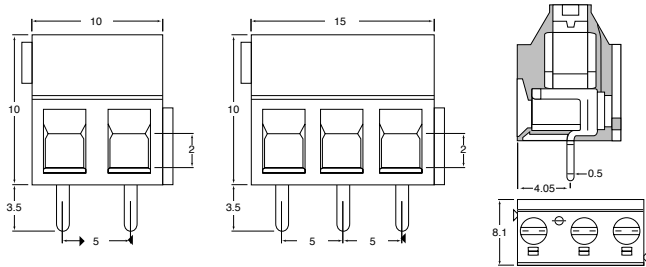

## ORDERING INFORMATION

DBC	TB	12	/2
Dubilier Connectors	Series Terminal Block	Style	N° of Ways 2 = 2 ways 3 = 3 ways
			* Other Number of ways are available up to 12 Please consult office for further details

## TERMINAL BLOCKS

- 5.00mm pitch
- Professional rising clamp - Designed to prevent cable entry below clamp
- 4.0mm<sup>2</sup> wire acceptance
- Rating 24A/450V
- CE approved
- Colour green
- Interlocking


## SPECIFICATION

**Rating:** 24A/450Volts  
**Dielectric Strength:** >2.5KV  
**Insulation Resistance:** >5MΩ  
**Working temperature:** -20°C to 125°C  
**Short Period:** 160°  
**Moulding:** UL94V-0 flame retardant nylon 66

**Pin/terminal:** 5 micron tinned nickel plated brass  
**Rising clamp:** Nickel plated brass  
**Screw/torque:** M3 Zinc steel/0.5Nm, colour passivated and tropicalised  
**Recommended PCB hole size:** ø1.3mm<sup>2</sup>



## OUTLINE DRAWING

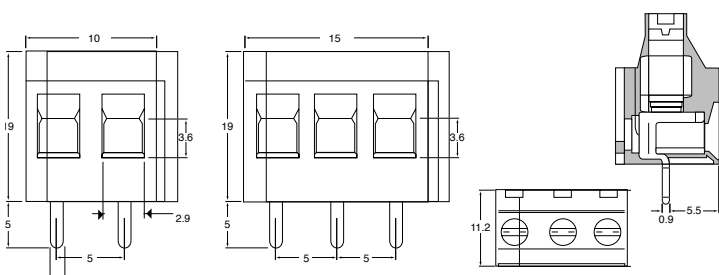

## ORDERING INFORMATION

DBC	TB	14	/2
Dubilier Connectors	Series Terminal Block	Style	N° of Ways 2 = 2 ways 3 = 3 ways
			* Other Number of ways are available up to 12 Please consult office for further details