



# MBR6020PT~MBR60100PT

## 60 AMPERES SCHOTTKY BARRIER RECTIFIERS


**VOLTAGE** 20 to 100 Volts    **CURRENT** 60 Amperes

### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O. Flame Retardant Epoxy Molding Compound.
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency.
- High current capability
- Guardring for overvoltage protection
- For use in low voltage, high frequency inverters free wheeling, and polarity protection applications.
- Pb free product are available : 99% Sn above can meet Rohs environment substance directive request

### MECHANICAL DATA

Case: TO-3P molded plastic  
 Terminals: solder plated, solderable per MIL-STD-750, Method 2026  
 Polarity: As marked.  
 Mounting Position: Any  
 Weight: 0.2 ounces, 5.6 grams.

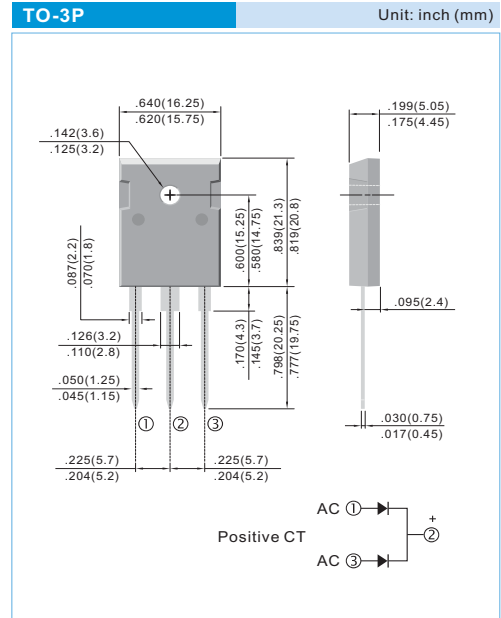

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%

| PARAMETER   | SYMBOL           | MBR6020PT    | MBR6030PT | MBR6040PT | MBR6045PT | MBR6050PT | MBR6060PT | MBR6080PT | MBR60100PT | UNITS  |
|---|------------------|--------------|-----------|-----------|-----------|-----------|-----------|-----------|------------|--------|
| Maximum Recurrent Peak Reverse Voltage  | V <sub>RRM</sub> | 20           | 30        | 40        | 45        | 50        | 60        | 80        | 100        | V      |
| Maximum RMS Voltage   | V <sub>RMS</sub> | 14           | 21        | 28        | 31.5      | 35        | 42        | 56        | 70         | V      |
| Maximum DC Blocking Voltage   | V <sub>DC</sub>  | 20           | 30        | 40        | 45        | 50        | 60        | 80        | 100        | V      |
| Maximum Average Forward Current (See fig.1)   | I <sub>AV</sub>  | 40           |           |           |           |           |           |           |            | A      |
| Peak Forward Surge Current :8.3ms single half sine-wave superimposed on rated load(JEDEC method)    | I <sub>FSM</sub> | 400          |           |           |           |           |           |           |            | A      |
| Maximum Forward Voltage at 30A, per leg   | V <sub>F</sub>   | 0.7          |           |           |           | 0.8       |           |           |            | V      |
| Maximum DC Reverse Current T <sub>c</sub> =25 °C at Rated DC Blocking Voltage T <sub>c</sub> =125°C | I <sub>R</sub>   |              |           |           |           | 0.1<br>20 |           |           |            | mA     |
| Typical Thermal Resistance  | R <sub>θJC</sub> | 1.5          |           |           |           |           |           |           |            | °C / W |
| Operating Junction Temperature Range  | T <sub>J</sub>   | -50 TO + 150 |           |           |           |           |           |           |            | °C     |
| Storage Temperature Range   | T <sub>STG</sub> | -50 TO + 175 |           |           |           |           |           |           |            | °C     |

Notes :  
 Both Bonding and Chip structure are available.



# MBR6020PT~MBR60100PT

## RATING AND CHARACTERISTIC CURVES

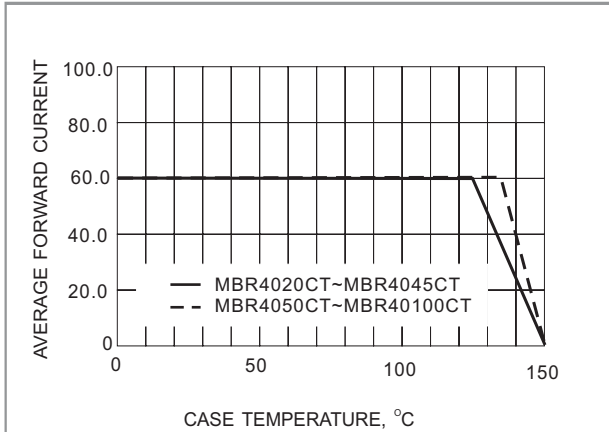


Fig.1- FORWARD CURRENT DERATING CURVE

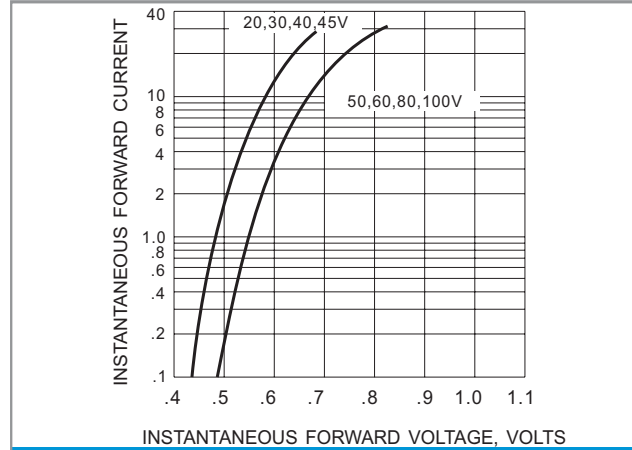


Fig.2- TYPICAL INSTANEOUS FORWARD CHARACTERISTIC

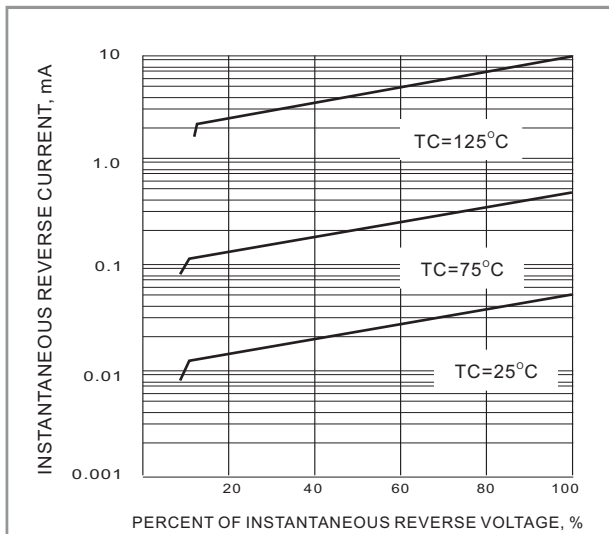


Fig.3- TYPICAL REVERSE CHARACTERISTICS

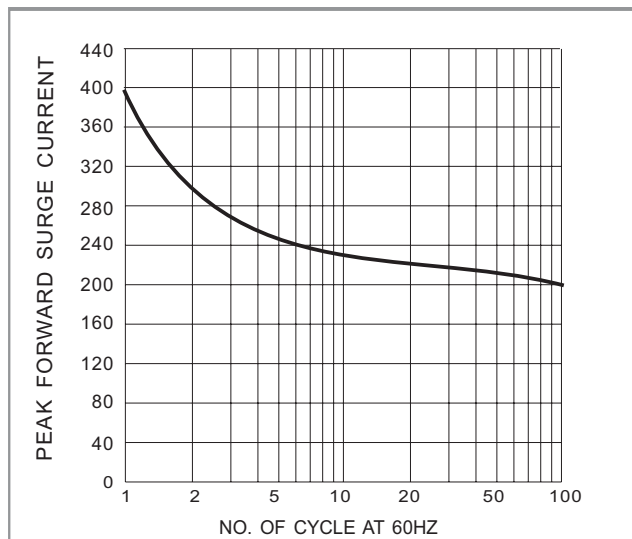


Fig.4- MAXIMUM NON-REPETITIVE SURGE CURRENT