



## Pot Capacitors for Coupling Purposes


**TDZ 050170 15 KV<sub>P</sub>**

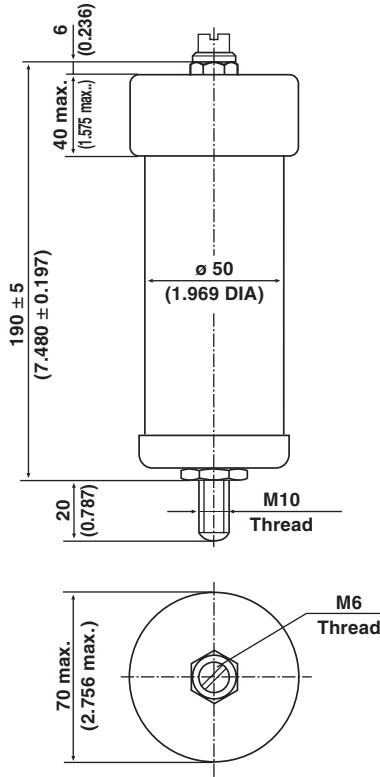

**TDFZ 060197 20 KV<sub>P</sub>**  
**TDFZ 060215 15 KV<sub>P</sub>**

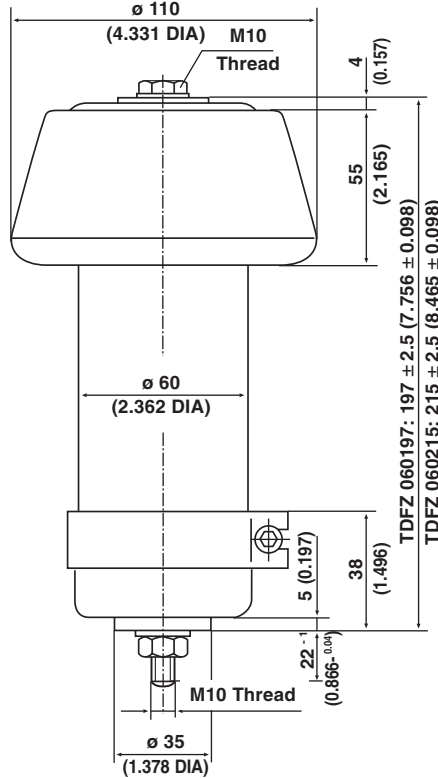

**TDFZ 070265 20 KV<sub>P</sub>**

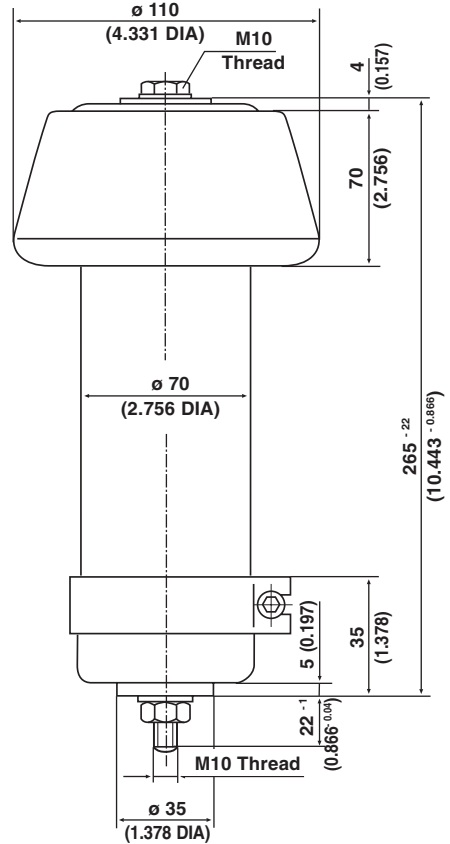

• Dimensions in millimeters (inches)

**MATERIAL:**

Capacitor elements made from Class 1 ceramic dielectric with noble metal electrodes.  
Connection terminals: Copper brass/silver plated.

**FINISH:**

Noble metal electrodes completely lacquered. Insulating rim protected with resin encapsulation (TDZ model) or silicone rubber (TDFZ model).

**MARKING:**

Type designator, Capacitance value and tolerance, Rated voltage (peak value), Production date code, Ceramic material code, DRALORIC Logo.

**ACCESSORIES ADDED:**

Hex. nuts/screws and washers.


ORDERING INFORMATION				
TDFZ 060197	20 KV <sub>P</sub>	10 000 pF	± 20 %	N 3300
MODEL	RATED VOLTAGE	CAPACITANCE VALUE	TOLERANCE	CERAMIC



**DERATING DIAGRAMS**

<b>TDZ 050170</b>				
CERAMIC	CAPACITANCE VALUE [pF]	RATED VOLTAGE [KV <sub>p</sub> ]	RATED POWER [KVA <sub>r</sub> ]	RATED CURRENT [A <sub>RMS</sub> ]
N 3300	10 000	15	12.5	max. 20


**CAPACITANCE TOLERANCES:** ± 20 %

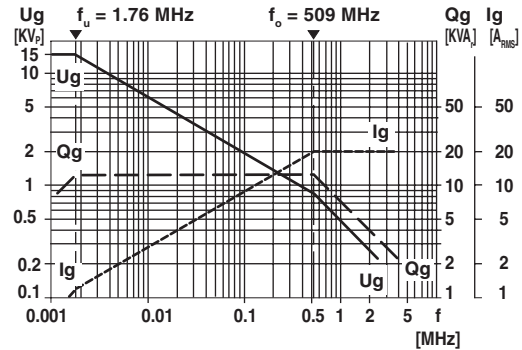

<b>TDFZ 060197</b>				
CERAMIC	CAPACITANCE VALUE [pF]	RATED VOLTAGE [KV <sub>p</sub> ]*	RATED POWER [KVA <sub>r</sub> ]	RATED CURRENT [A <sub>RMS</sub> ]
N 3300	10 000	20	20	max. 30

\* Rated voltage 20 KV<sub>p</sub> = RF - Peak-voltage + DC voltage


**CAPACITANCE TOLERANCES:** ± 20 %

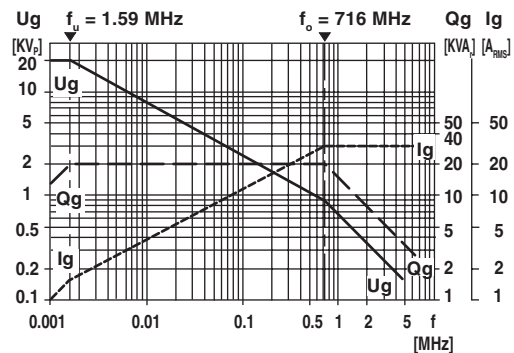

<b>TDFZ 060215</b>				
CERAMIC	CAPACITANCE VALUE [pF]	RATED VOLTAGE [KV <sub>p</sub> ]*	RATED POWER [KVA <sub>r</sub> ]	RATED CURRENT [A <sub>RMS</sub> ]
N 3300	1500	15	30	max. 40

\* Rated voltage 15 KV<sub>p</sub> = RF - Peak-voltage + DC voltage


**CAPACITANCE TOLERANCES:** ± 20 %

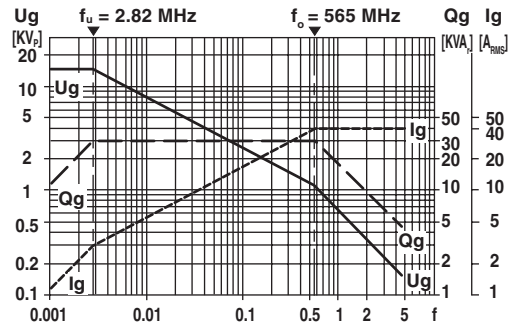

<b>TDFZ 070265</b>				
CERAMIC	CAPACITANCE VALUE [pF]	RATED VOLTAGE [KV <sub>p</sub> ]*	RATED POWER [KVA <sub>r</sub> ]	RATED CURRENT [A <sub>RMS</sub> ]
N 230	10 000	20	40	max. 40

\* Rated voltage 20KV<sub>p</sub> = RF - Peak-voltage + DC voltage

**CAPACITANCE TOLERANCES:** ± 20 %, ± 10 %

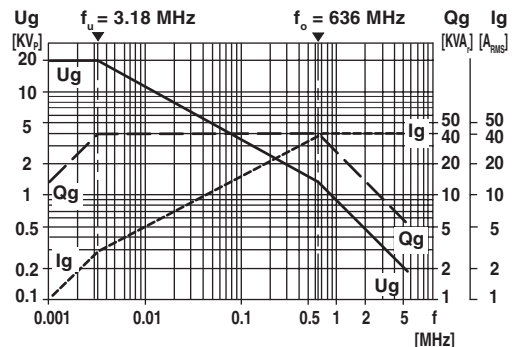



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.