

# Aluminum Capacitors Radial Standard Miniature





Fig.1 Component outline.



## FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte.
- Radial leads, cylindrical aluminum case, insulated with a blue vinyl sleeve.
- Pressure relief for case  $\varnothing D \geq 6.3$  mm.
- Charge and discharge proof.
- Miniaturized, high CV-product per unit volume.
- Lead (Pb)-Free versions are RoHS compliant.

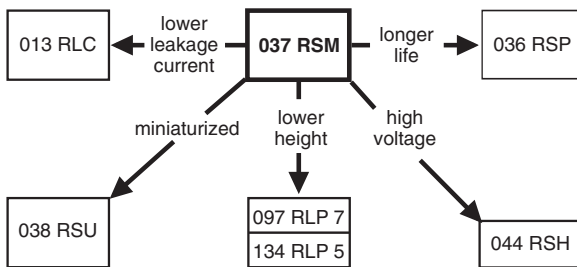

**RoHS\***  
COMPLIANT

## APPLICATIONS

- General purpose, industrial, automotive and audio-video.
- Coupling, decoupling, timing, smoothing, filtering, buffering in SMPS.
- Portable and mobile equipment (small size, low mass).

## MARKING

The capacitors are marked (where possible) with the following information:

- Rated capacitance (in  $\mu F$ ).
- Tolerance on rated capacitance, code letter in accordance with IEC 60062 (M for  $\pm 20\%$ ).
- Rated voltage (in V).
- Date code in accordance with IEC 60062.
- Code indicating factory of origin.
- Name of manufacturer.
- Negative terminal identification.
- Series number (037).

## QUICK REFERENCE DATA

DESCRIPTION	VALUE
Nominal case sizes ( $\varnothing D \times L$ in mm)	5 × 11 to 16 × 31
Rated capacitance range, $C_R$	0.47 to 10000 $\mu F$
Tolerance on $C_R$	$\pm 20\%$ ; $\pm 10\%$ on request
Rated voltage range, $U_R$	6.3 to 100 V
Category temperature range	- 40 to + 85 °C
Endurance test at 85 °C	2000 hours
Useful life at 85 °C	2500 hours
Useful life at 40 °C, $1.4 \times I_R$ applied	70000 hours
Shelf life at 0 V, 85 °C	500 hours
Based on sectional specification	IEC 60384-4/EN130300
Climatic category IEC 60068	40/085/56

## SELECTION CHART FOR $C_R$ , $U_R$ AND RELEVANT NOMINAL CASE SIZES ( $\varnothing D \times L$ in mm)

$C_R$ ( $\mu F$ )	$U_R$ (V)								
	6.3	10	16	25	35	40	50	63	100
0.47	-	-	-	-	-	-	-	5 × 11	5 × 11
1.0	-	-	-	-	-	-	-	5 × 11	5 × 11
2.2	-	-	-	-	-	-	-	5 × 11	5 × 11
3.3	-	-	-	-	-	-	-	5 × 11	5 × 11
4.7	-	-	-	-	-	-	-	5 × 11	5 × 11
10	-	-	-	-	-	-	5 × 11	5 × 11	6.3 × 11
22	-	-	-	-	-	-	5 × 11	6.3 × 11	8 × 12
33	-	-	-	-	5 × 11	-	-	6.3 × 11	10 × 12
47	-	-	-	5 × 11	-	-	6.3 × 11	8 × 12	10 × 16
68	-	-	5 × 11	6.3 × 11	-	-	8 × 12	10 × 12	-
100	-	5 × 11	6.3 × 11	6.3 × 11	-	-	8 × 12	10 × 12	10 × 20
150	-	6.3 × 11	-	8 × 12	-	10 × 12	-	10 × 16	-
220	-	6.3 × 11	8 × 12	8 × 12	10 × 12	-	10 × 16	10 × 20	12.5 × 2

\* Pb containing terminations are not RoHS compliant, exemptions may apply

<b>SELECTION CHART FOR <math>C_R</math>, <math>U_R</math> AND RELEVANT NOMINAL CASE SIZES (<math>\varnothing D \times L</math> in mm)</b>									
$C_R$ ( $\mu F$ )	$U_R$ (V)								
	6.3	10	16	25	35	40	50	63	100
330	6.3 × 11	–	8 × 12	10 × 12	10 × 16	–	10 × 20	12.5 × 20	16 × 25
470	–	8 × 12	10 × 12	10 × 16	10 × 20	12.5 × 20	12.5 × 20	12.5 × 25	16 × 31
680	–	–	10 × 16	–	12.5 × 20	12.5 × 25	12.5 × 25	16 × 25	–
1000	10 × 12	10 × 16	10 × 20	12.5 × 20	12.5 × 25	16 × 25	16 × 25	16 × 31	–
1500	10 × 20	–	12.5 × 20	12.5 × 25	16 × 25	–	–	–	–
2200	12.5 × 20	12.5 × 20	12.5 × 25	16 × 25	16 × 31	–	–	–	–
3300	12.5 × 20	12.5 × 25	16 × 25	16 × 31	–	–	–	–	–
4700	–	16 × 25	16 × 31	–	–	–	–	–	–
6800	–	16 × 31	–	–	–	–	–	–	–
10000	16 × 31	–	–	–	–	–	–	–	–

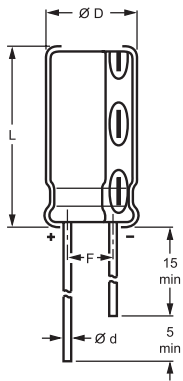
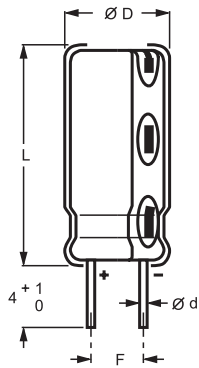

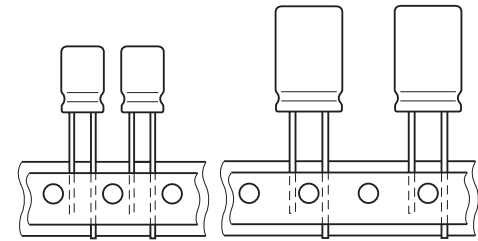
**DIMENSIONS in millimeters AND AVAILABLE FORMS**

 Fig.2 **Form CA:**  
 Long leads.

 Fig.3 **Form CB:**  
 Cut leads.

 Case  $\varnothing D = 5$  to 8 mm; pitch  $F = 5$  mm.

 Pitch  $F$  see tables 1 and 2.

 Fig.5 **Form TNA, Form TFA:** Taped in box  
 (ammopack), straight leads.

Table 1

<b>DIMENSIONS in millimeters, MASS AND PACKAGING QUANTITIES</b>									
NOMINAL CASE SIZE $\varnothing D \times L$	CASE CODE	$\varnothing d$	$\varnothing D_{max}$	$L_{max}$	F	MASS (g)	PACKAGING QUANTITIES		
							FORM CA	FORM CB	FORM TFA, TNA
5 × 11	11	0.5	5.5	12.5	2.0 ± 0.5	≈ 0.4	3000	–	2000
6.3 × 11	12	0.5	6.8	12.5	2.5 ± 0.5	≈ 0.6	2000	–	2000
8 × 12	13	0.6	8.5	13.0	3.5 ± 0.5	≈ 1.1	1000	–	1000
10 × 12	14	0.6	10.5	13.5	5.0 ± 0.5	≈ 1.6	1000	1000	500
10 × 16	15	0.6	10.5	17.5	5.0 ± 0.5	≈ 1.9	1000	1000	500
10 × 20	16	0.6	10.5	22.0	5.0 ± 0.5	≈ 2.2	1000	500	500
12.5 × 20	17	0.6	13.0	22.0	5.0 ± 0.5	≈ 4.0	1000	2000	500
12.5 × 25	18	0.6	13.0	27.0	5.0 ± 0.5	≈ 5.0	500	2000	500
16 × 25	19	0.8	16.5	27.0	7.5 ± 0.5	≈ 8.0	500	1000	250
16 × 31	20	0.8	16.5	33.5	7.5 ± 0.5	≈ 9.0	200	1000	250

**Note**

1. Detailed tape dimensions see section 'PACKAGING'.

ELECTRICAL DATA	
SYMBOL	DESCRIPTION
$C_R$	rated capacitance at 100 Hz, tolerance $\pm 20\%$
$I_R$	rated RMS ripple current at 100 Hz, 85 °C
$I_{L1}$	max. leakage current after 1 minute at $U_R$
$\tan \delta$	max. dissipation factor at 100 Hz
Z	max. impedance at 10 kHz

**Note**

1. Unless otherwise specified, all electrical values in Table 2 apply at  $T_{amb} = 20\text{ °C}$ ,  $P = 86$  to  $106\text{ kPa}$ ,  $RH = 45$  to  $75\%$ .

**ORDERING EXAMPLE\***

Electrolytic capacitor 037 series

1000  $\mu\text{F}/16\text{ V}$ ;  $\pm 20\%$

Nominal case size:  $\varnothing 10 \times 20\text{ mm}$ ; Form TFA

Catalog number: 2222 037 35102.

\* To ensure delivery of lead (Pb)-free parts during the transition period, please contact your Vishay sales agent.

Table 2

ELECTRICAL DATA AND ORDERING INFORMATION														
$U_R$ (V)	$C_R$ 100 Hz ( $\mu\text{F}$ )	NOMINAL CASE SIZE $\varnothing D \times L$ (mm)	$I_R$ 100 Hz 85 °C (mA)	$I_{L1}$ 1 min ( $\mu\text{A}$ )	$\tan \delta$ 100 Hz	Z 10 kHz ( $\Omega$ )	CATALOG NUMBER 2222 037 .....							
							BULK PACKAGING				TAPED AMMOPACK			
							LONG LEADS		CUT LEADS		FORM TFA		FORM TNA	
							FORM CA	F (mm)	FORM CB	F (mm)	FORM TFA	F (mm)	FORM TNA	F (mm)
6.3	330	$6.3 \times 11$	280	24	0.24	1.8	90021	2.5	–	–	90027	5.0	90028	2.5
	1000	$10 \times 12$	530	66	0.24	0.6	53102	5.0	63102	5.0	33102	5.0	–	–
	1500	$10 \times 20$	730	98	0.25	0.4	53152	5.0	63152	5.0	33152	5.0	–	–
	2200	$12.5 \times 20$	990	140	0.26	0.27	53222	5.0	63222	5.0	33222	5.0	–	–
	3300	$12.5 \times 20$	1150	210	0.28	0.18	53332	5.0	63332	5.0	33332	5.0	–	–
	10000	$16 \times 31$	2250	630	0.42	0.07	53103	7.5	63103	7.5	33103	7.5	–	–
10	100	$5 \times 11$	140	13	0.20	4.5	54101	2.0	–	–	34101	5.0	74101	2.5
	150	$6.3 \times 11$	180	18	0.20	3.0	54151	2.5	–	–	34151	5.0	74151	2.5
	220	$6.3 \times 11$	250	25	0.20	2.0	90029	2.5	–	–	90036	5.0	90037	2.5
	470	$8 \times 12$	410	50	0.20	0.96	54471	3.5	–	–	34471	5.0	74471	3.5
	1000	$10 \times 16$	630	100	0.20	0.45	54102	5.0	64102	5.0	34102	5.0	–	–
	2200	$12.5 \times 20$	1050	220	0.22	0.20	54222	5.0	64222	5.0	34222	5.0	–	–
	3300	$12.5 \times 25$	1350	330	0.24	0.14	54332	5.0	64332	5.0	34332	5.0	–	–
	4700	$16 \times 25$	1800	470	0.28	0.10	54472	7.5	64472	7.5	34472	7.5	–	–
	6800	$16 \times 31$	2200	680	0.32	0.07	54682	7.5	64682	7.5	34682	7.5	–	–
16	68	$5 \times 11$	130	14	0.16	4.7	55689	2.0	–	–	35689	5.0	75689	2.5
	100	$6.3 \times 11$	180	19	0.16	3.2	55101	2.5	–	–	35101	5.0	75101	2.5
	220	$8 \times 12$	300	38	0.16	1.5	55221	3.5	–	–	35221	5.0	75221	3.5
	330	$8 \times 12$	370	56	0.16	0.97	90038	3.5	–	–	90045	5.0	90046	3.5
	470	$10 \times 12$	420	78	0.16	0.68	55471	5.0	65471	5.0	35471	5.0	–	–
	680	$10 \times 16$	520	110	0.16	0.47	55681	5.0	65681	5.0	35681	5.0	–	–
	1000	$10 \times 20$	740	160	0.16	0.32	55102	5.0	65102	5.0	35102	5.0	–	–
	1500	$12.5 \times 20$	900	240	0.17	0.21	55152	5.0	65152	5.0	35152	5.0	–	–
	2200	$12.5 \times 25$	1200	360	0.18	0.15	55222	5.0	65222	5.0	35222	5.0	–	–
	3300	$16 \times 25$	1650	530	0.20	0.10	55332	7.5	65332	7.5	35332	7.5	–	–
	4700	$16 \times 31$	2100	760	0.24	0.07	55472	7.5	65472	7.5	35472	7.5	–	–



Aluminum Capacitors  
Radial Standard Miniature


Vishay BCcomponents

ELECTRICAL DATA AND ORDERING INFORMATION														
U <sub>R</sub> (V)	C <sub>R</sub> 100 Hz (μF)	NOMINAL CASE SIZE ∅D × L (mm)	I <sub>R</sub> 100 Hz 85 °C (mA)	I <sub>L1</sub> 1 min (μA)	Tan δ 100 Hz	Z 10 kHz (Ω)	CATALOG NUMBER 2222 037 .....							
							BULK PACKAGING				TAPED AMMOPACK			
							LONG LEADS		CUT LEADS		FORM TFA		FORM TNA	
							FORM CA	F (mm)	FORM CB	F (mm)	FORM TFA	F (mm)	FORM TNA	F (mm)
25	47	5 × 11	120	15	0.14	4.7	56479	2.0	–	–	36479	5.0	76479	2.5
	68	6.3 × 11	130	20	0.14	3.2	56689	2.5	–	–	36689	5.0	76689	2.5
	100	6.3 × 11	190	28	0.14	2.2	90047	2.5	–	–	90054	5.0	90055	2.5
	150	8 × 12	230	41	0.14	1.5	56151	3.5	–	–	36151	5.0	76151	3.5
	220	8 × 12	320	58	0.14	1.0	56221	3.5	–	–	36221	5.0	76221	3.5
	330	10 × 12	410	86	0.14	0.67	56331	5.0	66331	5.0	36331	5.0	–	–
	470	10 × 16	510	120	0.14	0.47	56471	5.0	66471	5.0	36471	5.0	–	–
	1000	12.5 × 20	910	250	0.14	0.22	56102	5.0	66102	5.0	36102	5.0	–	–
	1500	12.5 × 25	1100	380	0.15	0.15	56152	5.0	66152	5.0	36152	5.0	–	–
	2200	16 × 25	1500	550	0.16	0.10	56222	7.5	66222	7.5	36222	7.5	–	–
	3300	16 × 31	1900	830	0.18	0.07	56332	7.5	66332	7.5	36332	7.5	–	–
	35	33	5 × 11	110	15	0.12	4.5	50339	2.0	–	–	30339	5.0	70339
220		10 × 12	330	80	0.12	0.68	50221	5.0	60221	5.0	30221	5.0	–	–
330		10 × 16	450	120	0.12	0.45	50331	5.0	60331	5.0	30331	5.0	–	–
470		10 × 20	590	170	0.12	0.32	50471	5.0	60471	5.0	30471	5.0	–	–
680		12.5 × 20	830	240	0.12	0.22	50681	5.0	60681	5.0	30681	5.0	–	–
1000		12.5 × 25	1050	350	0.12	0.15	50102	5.0	60102	5.0	30102	5.0	–	–
1500		16 × 25	1400	530	0.13	0.10	50152	7.5	60152	7.5	30152	7.5	–	–
2200		16 × 31	1750	770	0.14	0.07	50222	7.5	60222	7.5	30222	7.5	–	–
40	150	10 × 12	250	63	0.12	0.87	57151	5.0	67151	5.0	37151	5.0	–	–
	470	12.5 × 20	670	190	0.12	0.28	57471	5.0	67471	5.0	37471	5.0	–	–
	680	12.5 × 25	850	280	0.12	0.19	57681	5.0	67681	5.0	37681	5.0	–	–
	1000	16 × 25	1200	400	0.12	0.13	57102	7.5	67102	7.5	37102	7.5	–	–
50	10	5 × 11	65	8	0.10	9.5	51109	2.0	–	–	31109	5.0	71109	2.5
	22	5 × 11	95	14	0.10	4.3	90056	2.0	–	–	90063	5.0	90064	2.5
	47	6.3 × 11	150	27	0.10	2.0	90065	2.5	–	–	90072	5.0	90073	2.5
	68	8 × 12	190	37	0.10	1.4	51689	3.5	–	–	31689	5.0	71689	3.5
	100	8 × 12	260	53	0.10	0.95	51101	3.5	–	–	31101	5.0	71101	3.5
	220	10 × 16	400	110	0.10	0.43	51221	5.0	61221	5.0	31221	5.0	–	–
	330	10 × 20	580	170	0.10	0.29	51331	5.0	61331	5.0	31331	5.0	–	–
	470	12.5 × 20	740	240	0.10	0.20	51471	5.0	61471	5.0	31471	5.0	–	–
	680	12.5 × 25	950	340	0.10	0.14	51681	5.0	61681	5.0	31681	5.0	–	–
	1000	16 × 25	1350	500	0.10	0.10	51102	7.5	61102	7.5	31102	7.5	–	–
63	0.47	5 × 11	11	3.3	0.09	170	58477	2.0	–	–	38477	5.0	78477	2.5
	1.0	5 × 11	16	3.6	0.09	80	58108	2.0	–	–	38108	5.0	78108	2.5
	2.2	5 × 11	29	4.4	0.09	36	58228	2.0	–	–	38228	5.0	78228	2.5
	3.3	5 × 11	35	5.1	0.09	24	58338	2.0	–	–	38338	5.0	78338	2.5
	4.7	5 × 11	45	6.0	0.09	17	58478	2.0	–	–	38478	5.0	78478	2.5
	10	5 × 11	70	9.3	0.09	8.0	58109	2.0	–	–	38109	5.0	78109	2.5
	22	6.3 × 11	110	17	0.09	3.6	58229	2.5	–	–	38229	5.0	78229	2.5
	33	6.3 × 11	140	24	0.09	2.4	90074	2.5	–	–	90081	5.0	90082	2.5
	47	8 × 12	190	33	0.09	1.7	58479	3.5	–	–	38479	5.0	78479	3.5
	68	10 × 12	200	46	0.09	1.2	58689	5.0	68689	5.0	38689	5.0	–	–
	100	10 × 12	260	66	0.09	0.80	58101	5.0	68101	5.0	38101	5.0	–	–
	150	10 × 16	320	98	0.09	0.53	58151	5.0	68151	5.0	38151	5.0	–	–
	220	10 × 20	460	140	0.09	0.36	58221	5.0	68221	5.0	38221	5.0	–	–
	330	12.5 × 20	650	210	0.09	0.24	58331	5.0	68331	5.0	38331	5.0	–	–
	470	12.5 × 25	850	300	0.09	0.17	58471	5.0	68471	5.0	38471	5.0	–	–
	680	16 × 25	1150	430	0.09	0.12	58681	7.5	68681	7.5	38681	7.5	–	–
	1000	16 × 31	1550	630	0.09	0.08	58102	7.5	68102	7.5	38102	7.5	–	–
	100	0.47	5 × 11	12	3.5	0.07	130	59477	2.0	–	–	39477	5.0	79477
1.0		5 × 11	22	4	0.07	60	59108	2.0	–	–	39108	5.0	79108	2.5
2.2		5 × 11	33	5.2	0.07	27	59228	2.0	–	–	39228	5.0	79228	2.5
3.3		5 × 11	40	6.3	0.07	18	59338	2.0	–	–	39338	5.0	79338	2.5
4.7		5 × 11	48	7.7	0.07	13	59478	2.0	–	–	39478	5.0	79478	2.5
10		6.3 × 11	80	13	0.07	6.0	59109	2.5	–	–	39109	5.0	79109	2.5
22		8 × 12	130	25	0.07	2.7	59229	3.5	–	–	39229	5.0	79229	3.5
33		10 × 12	160	36	0.07	1.8	59339	5.0	69339	5.0	39339	5.0	–	–
47		10 × 16	210	50	0.07	1.3	59479	5.0	69479	5.0	39479	5.0	–	–
100		10 × 20	350	100	0.07	0.60	59101	5.0	69101	5.0	39101	5.0	–	–
220		12.5 × 25	580	220	0.07	0.27	59221	5.0	69221	5.0	39221	5.0	–	–
330		16 × 25	710	330	0.07	0.18	59331	7.5	69331	7.5	39331	7.5	–	–
470		16 × 31	900	470	0.07	0.13	59471	7.5	69471	7.5	39471	7.5	–	–




ADDITIONAL ELECTRICAL DATA		
PARAMETER	CONDITIONS	VALUE
<b>Voltage</b>		
Surge voltage		$U_s \leq 1.15 \times U_R$
Reverse voltage		$U_{rev} \leq 1 \text{ V}$
<b>Current</b>		
Leakage current	after 1 minute at $U_R$	$I_{L1} \leq 0.01 C_R \times U_R + 3 \mu\text{A}$
	after 5 minutes at $U_R$	$I_{L5} \leq 0.002 C_R \times U_R + 3 \mu\text{A}$
<b>Inductance</b>		
Equivalent series inductance (ESL)	case $\varnothing D \leq 8 \text{ mm}$	typ. 13 nH
	case $\varnothing D = 10 \text{ mm}$	typ. 16 nH
	case $\varnothing D \geq 12.5 \text{ mm}$	typ. 18 nH
<b>Resistance</b>		
Equivalent series resistance (ESR)	calculated from $\tan \delta_{max}$ and $C_R$ (see Table 2)	$ESR = \tan \delta / 2\pi f C_R$

**CAPACITANCE (C)**

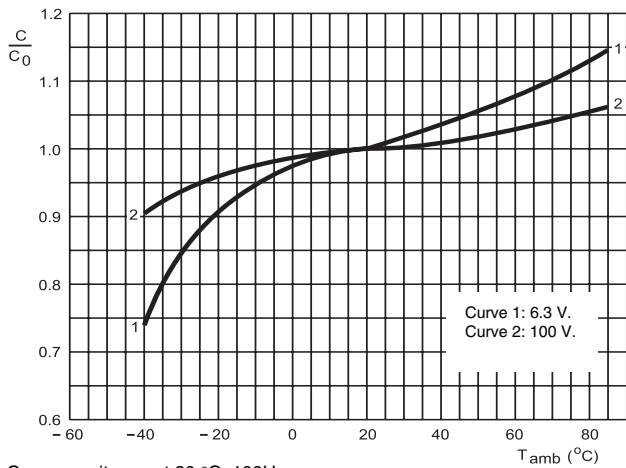

$C_0$  = capacitance at 20 °C, 100Hz.

Fig.6 Typical multiplier of capacitance as a function of ambient temperature.

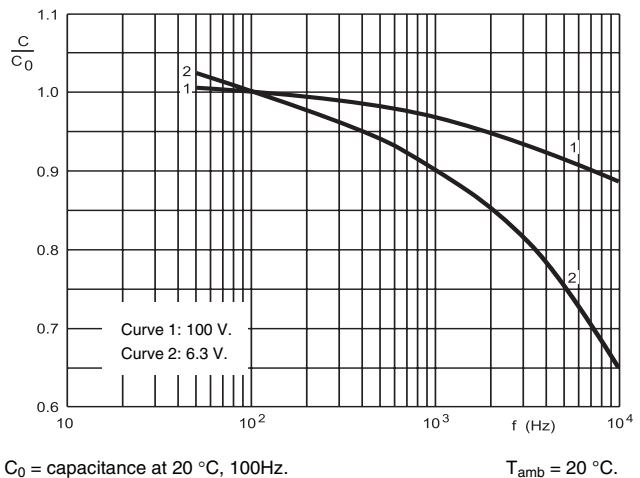

$C_0$  = capacitance at 20 °C, 100Hz.

$T_{amb} = 20 \text{ °C}$ .

Fig.7 Typical multiplier of capacitance as a function of frequency.

**IMPEDANCE (Z)**

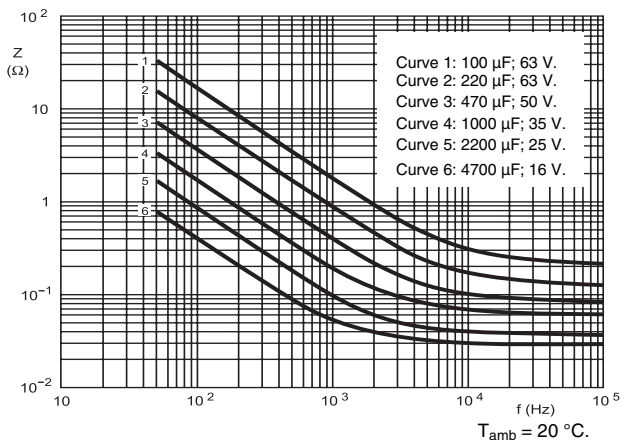
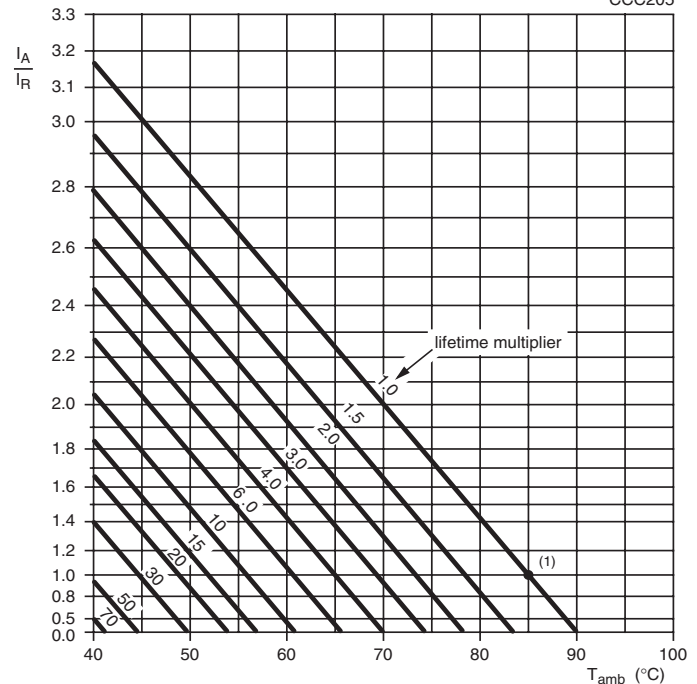


Fig.8 Typical impedance as a function of frequency.

**RIPPLE CURRENT AND USEFUL LIFE**

CCC205


 $I_A$  = actual ripple current at 100 Hz.

 $I_R$  = rated ripple current at 100 Hz, 85 °C.

 (1) Useful life at 85 °C and  $I_R$  applied: 2500 hours.

Fig.9 Multiplier of useful life as a function of ambient temperature and ripple current load.

Table 3

<b>MULTIPLIER OF RIPPLE CURRENT (<math>I_R</math>) AS A FUNCTION OF FREQUENCY</b>			
FREQUENCY (Hz)	$I_R$ MULTIPLIER		
	$U_R = 6.3$ to $10$ V	$U_R = 16$ to $35$ V	$U_R = 40$ to $100$ V
50	0.90	0.85	0.80
100	1.00	1.00	1.00
500	1.12	1.20	1.25
1000	1.20	1.30	1.40
3000	1.25	1.35	1.50
$\geq 10000$	1.30	1.40	1.60

Table 4

<b>TEST PROCEDURES AND REQUIREMENTS</b>			
TEST		PROCEDURE (quick reference)	REQUIREMENTS
Name of test	Reference		
Endurance	IEC 60384-4/ EN130300 subclause 4.13	$T_{amb} = 85$ °C; $U_R$ applied; 2000 hours	$U_R \leq 6.3$ V; $\Delta C/C$ : + 15 /- 30 % $U_R > 6.3$ V; $\Delta C/C$ : $\pm 20$ % $\tan \delta \leq 1.5 \times$ spec. limit $Z \leq 3 \times$ spec. limit $I_{L5} \leq$ spec. limit
Useful life	CECC 30301 subclause 1.8.1	$T_{amb} = 85$ °C; $U_R$ and $I_R$ applied; 2500 hours	$U_R \leq 6.3$ V; $\Delta C/C$ : + 45 /- 50 % $U_R > 6.3$ V; $\Delta C/C$ : $\pm 50$ % $\tan \delta \leq 3 \times$ spec. limit $Z \leq 3 \times$ spec. limit $I_{L5} \leq$ spec. limit no short or open circuit total failure percentage: $\leq 3$ %
Shelf life (storage at high temperature)	IEC 60384-4/ EN130300 subclause 4.17	$T_{amb} = 85$ °C; no voltage applied; 500 hours after test: $U_R$ to be applied for 30 minutes, 24 to 48 hours before measurement	$\Delta C/C$ , $\tan \delta$ , $Z$ : for requirements see 'Endurance test' above $I_{L5} \leq 2 \times$ spec. limit



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.