


S3AB thru S3MB

SURFACE MOUNT STANDARD RECOVERY RECTIFIER

VOLTAGE - 50 TO 100 VOLTS CURRENT - 3.0 AMPERES



SMB/DO-214AA

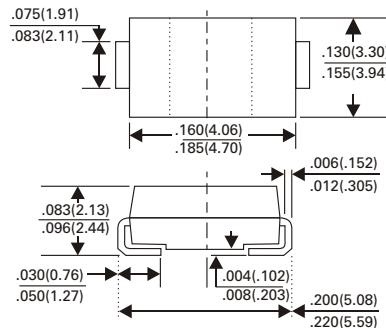

Dimensions in inches and (millimeters)

FEATURES

- For surface mount applications
- Glass passivated junction
- Low profile package
- Built-in strain relief
- Easy pick and place
- Low forward voltage drop
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- High temperature soldering : 260°C/10 seconds at terminals

MECHANICAL DATA

Case : JEDEC DO-214AA molded plastic
 Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
 Polarity : Indicated by cathode band
 Standard Package : 12mm tape (EIA STD EIA-481)
 Weight : 0.003 ounce, 0.093gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified
 Single phase, half wave, 60Hz, resistive or inductive load
 For capacitive load, derate current by 20%

	SYMBOL	S3AB	S3BB	S3DB	S3GB	S3JB	S3KB	S3MB	UNITS
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current at $T_L = 75^\circ C$	$I_{(AV)}$	3.0							Amps
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	100							Amps
Maximum Instantaneous Forward Voltage at 3.0A	V_F	1.2							Volts
Maximum DC Reverse Current (NOTE 1) $T_A = 25^\circ C$ at Rated DC Blocking Voltage $T_A = 125^\circ C$	I_R	5 250							μA
Typical Reverse Recovery Time (NOTE 1)	T_{RR}	2.5							nS
Maximum Thermal Resistance (NOTE 2)	$R_{\theta JA}$ $R_{\theta JL}$	13 47							$^\circ C / W$
Typical Junction Capacitance (NOTE 3)	C_J	53							pF
Operating and Storage Temperature Range	T_J T_{STG}	-55 to +150							$^\circ C$

NOTES :

1. Reverse Recovery Test Conditions : $I_F = 0.5A$, $I_R = 1.0A$, $I_{RR} = 0.25A$.
2. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts
3. 8.0mm² (0.13mm thick) land areas

S3AB thru S3MB

SURFACE MOUNT STANDARD RECOVERY RECTIFIER

RATINGS AND CHARACTERISTIC CURVES S3AB THRU S3MB

Fig. 1 - FORWARD CURRENT DERATING CURVE

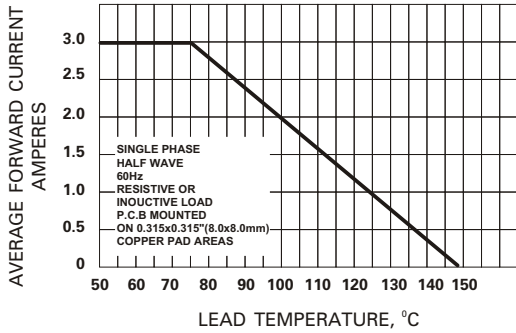


Fig. 2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

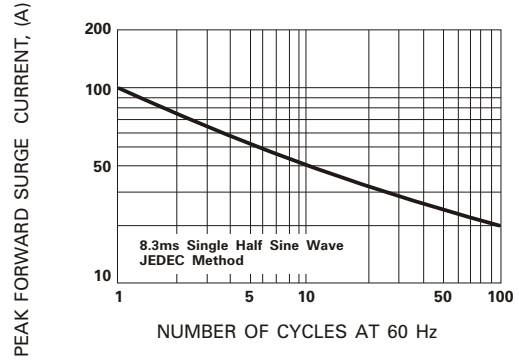


Fig. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

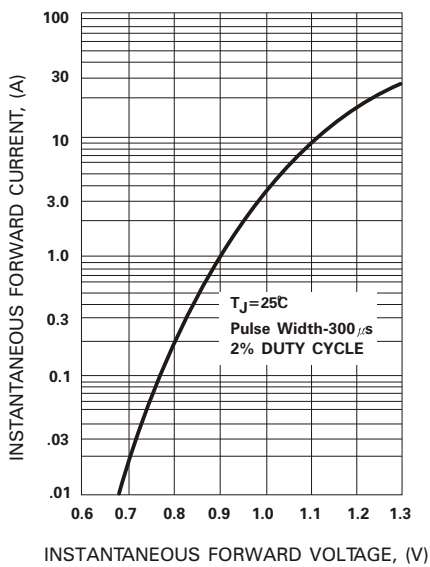


Fig. 4 - TYPICAL JUNCTION CAPACITANCE

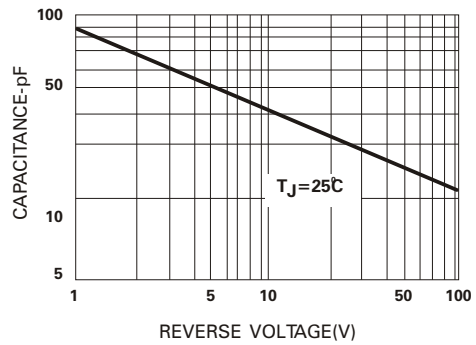


Fig. 5 - TYPICAL REVERSE CHARACTERISTICS

