


**AUDIO**

**RCA JACK RIGHT ANGLED SOCKET**

- Competitively priced
- Industry Compatible
- PCB Mounting

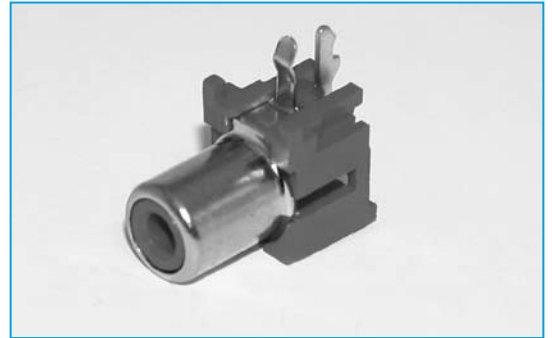


SECTION 6

**SPECIFICATION**

<b>Contact resistance:</b>	30mΩ max. (INITIAL)
<b>Insulation resistance:</b>	100mΩ min. AT 500V DC
<b>Withstanding Voltage:</b>	500V AC for one minute
<b>Soldering heat:</b>	260±5°C for 5±1 seconds
<b>Insertion Force:</b>	0.3-3.0 KG
<b>Extraction Force:</b>	0.3-3.0 KG
<b>Lifetime:</b>	5,000 cycles min

**OUTLINE DRAWING**

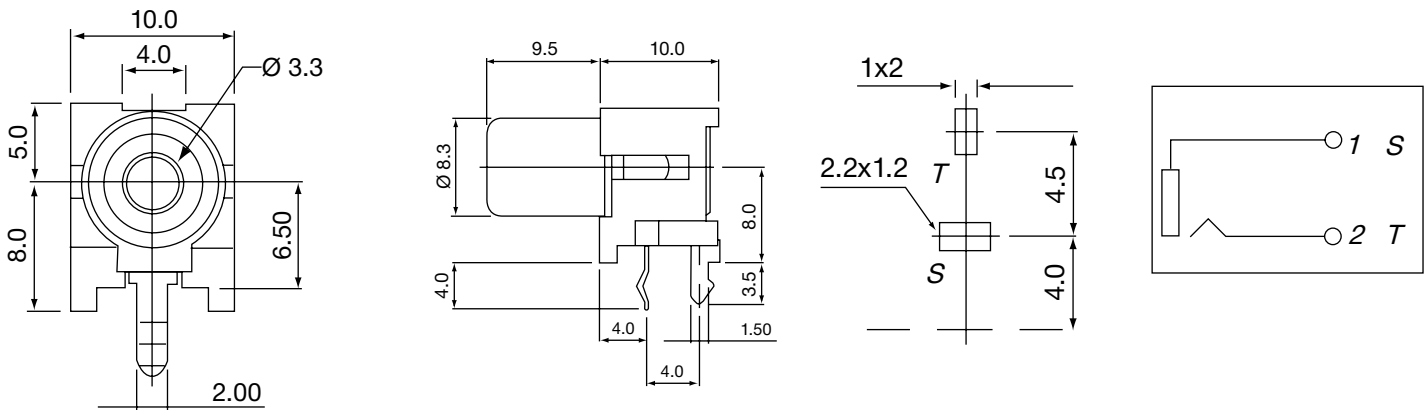

**ORDERING INFORMATION**

DBC	RCA	0848A	-2B
Dubilier Connectors	RCA Jacks	Series	Colour
			-2B = Black
			-2R = Red
			-2W = White
			-2Y = Yellow