


## BOARD TO WIRE CONNECTORS

## POLARISED 2.5mm PITCH

- 2 - 15 & 20 ways
- Accepts wire of 30 - 22 AWG
- Housing, Wafer and Terminal Available
- Current rating 3A AC, DC
- Voltage rating 250VAC, DC

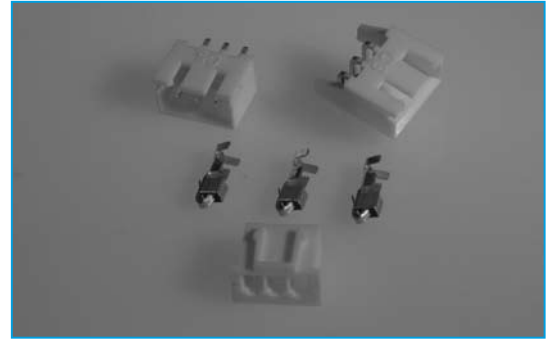

SECTION 8

### SPECIFICATION

#### General

**Withstand Voltage:** 1000v AC/min  
**Insulation Resistance:** 1000mΩ min  
**Temperature Range:** -25° C to +85° C

#### Wafer

**Material:**  
**Post:** Brass, Tin/Plated  
**Base:** Nylon 66, UL94V-0






#### Housing

**Material:** Nylon 66, UL94V-0

#### Terminal

**Wire Acceptance:** 22-30 AWG  
**Material:** Phos. Bronze  
**Finish:** Tin/plated 40μ" min  
**Thickness:** 0.2mm

### OUTLINE DRAWING

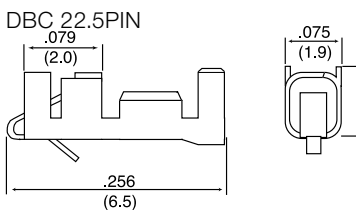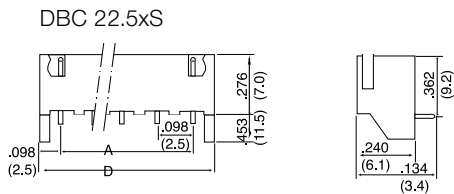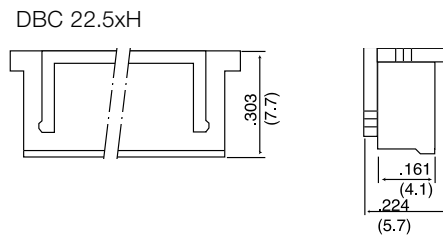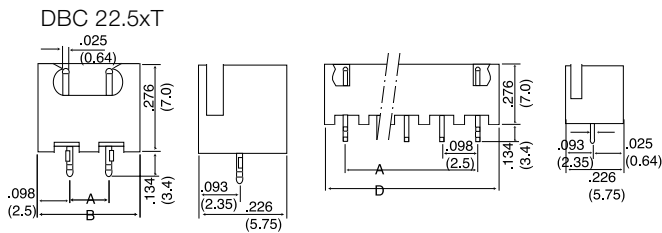

Dim	mm
A	(No ways x 2.5) -2.5
B	(No ways x 2.5) +0.7
C	(No ways x 2.5) +2.3
D	(No ways x 2.5) +2.5

### ORDERING INFORMATION

DBC	2	2.5	2	T
Dubilier Connectors	Series	Pitch	N° of Ways	Style
		2.5 = 2.5mm pitch	2 = 2ways 10 = 10ways etc	T = Top Entry S = Side Entry 90° H = Housing

DBC	2	2.5	PIN
Dubilier Connectors	Series	Pitch	Pin
		2.5 = 2.5mm pitch	