


3-Way Power Divider

P/N: JXWBGF-T-3-800-2500

Frequency Range(MHz)	800-2500
Insertion Loss(dB)	0.6 max
Isolation(dB)	22 min
Power Forward(W)	20
Power Reverse(W)	3
Phase Unbalance(°)	5
Amplitude Unbalance(dB)	0.35 max
VSWR	1.25 max
Connector	SMA-Female
Operating Temperature(°C)	-40 ~ +60
Storage Temperature(°C)	-45 ~ +80

Outline Drawing (Size: mm)

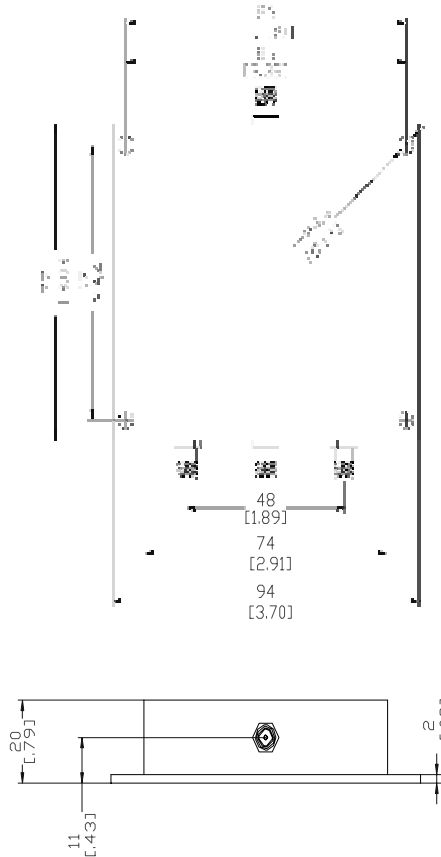

For current data sheets, please contact: sales@aacix.com