

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0502407725

Status:

Active

Description:

Ring Tongue Terminal for 14-16 AWG, Closed Uninsulated Brazed Barrel, Stud Size 10 (M5), Oxygen-Free Copper, Length 16.50mm (.650")

Documents:

Drawing (PDF)

Product Specification PS-50240-003 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR95446

General

Product Family

Series

Crimp Quality Equipment

Mil-Spec

Product Name

Type

Ring and Spade Terminals

50240

Yes

N/A

R (Ring)

Ring

Physical

Barrel Type

Insulation

Material - Plating Mating

Packaging Type

Plating min: Mating (µin)

Plating min: Mating (µm)

Plating min: Termination (µin)

Plating min: Termination (µm)

Stud Size

Termination Interface: Style

Wire Size AWG

Wire Size mm²

Closed - Brazed

None

Tin

Bag

40

1

40

1

10 (M5)

Crimp or Compression

14, 16

1.04 - 2.63

Material Info


Reference - Drawing Numbers

Product Specification

Sales Drawing

PS-50240-003

SD-50240-002



Series

image - Reference only

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

50240Series



Application Tooling | [FAQ](#)

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Japan

Description	Product #
Hand Crimper For JIS Terminal	0572575000
Hand Crimper For JIS Terminal	0573435002

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

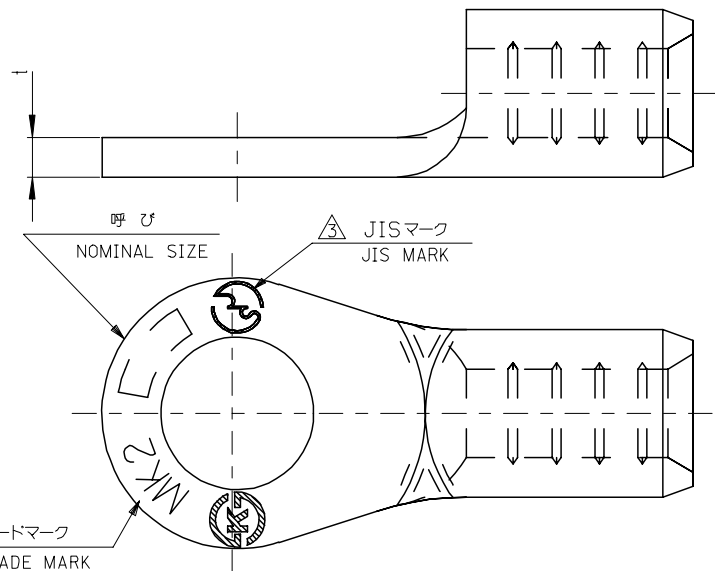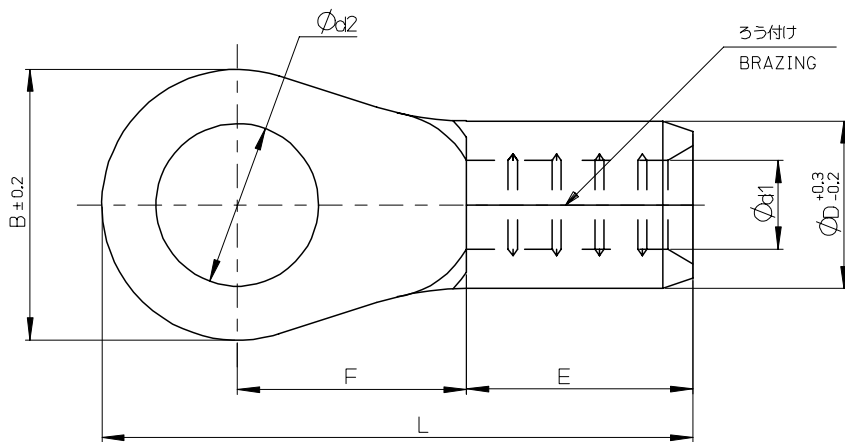

注記 NOTES

- 1 材質 MATERIAL
端子: 無酸素銅、スズメッキ
TERMINAL: OXYGEN FREE COPPER, TIN PLATING
ろう付け部: リン銅ろう
PART OF BRAZING : COPPER PHOSPHORUS BRAZING FILLER METALS
- 2 適用電線 APPLICABLE WIRE RANGE

単 線 SOLID WIRE	撚 線 STRANDED WIRE
1.14-1.82 mm	1.04-2.63 mm ²

△ JIS規格品。JISマークはJIS認定品のみ舌部に刻印。
THESE ITEMS ARE BASED ON JIS STANDARD.
JIS MARK SHOULD BE STAMPED AT TONGUE PART
ONLY IN THE RECOGNITION GOODS.

	0.8 ^{+0.1} _{-0.05}	13 ^{±0.2}	26.9 ^{±0.5}	13.9 ^{±0.5}	4.5 ^{±0.4}	2.4 ^{±0.3}	4.1	17		12	50240-7026
		10.5 ^{±0.2}	24 ^{±0.5}	12.3 ^{±0.5}				14.5		10	-7925
JIS	0.8 _{MIN}	8.4 ^{+0.2} ₀	22 _{MAX}	9 _{MIN}	4.1 _{MIN}	2.3 ^{±0.2}	4.2	12		8	-7826
											-7825
		5.3 ^{±0.2}	16.5 ^{±0.5}	7.8 ^{±0.5}				8.5		S5	-7725
		4.3 ^{±0.2}	14.4 ^{±0.5}	6.6 ^{±0.5}						M4	-7625
			16 ^{±0.5}	8.2 ^{±0.5}	4.5 ^{±0.4}	2.4 ^{±0.3}	4.1	6.6	2	S4	-7525
										L3.5	-7425
		3.7 ^{±0.2}	13.9 ^{±0.5}	6.5 ^{±0.5}				5.8		M3.5	-7325
			12.4 ^{±0.5}	4.6 ^{±0.5}				6.6		S3.5	-7126
			13.9 ^{±0.5}	6.6 ^{±0.5}				5.5		L3	-7225
		3.2 ^{±0.2}	12.4 ^{±0.5}	5.2 ^{±0.5}				6.6		M3	-7125
				4.6 ^{±0.5}						3	50240-7025
△	t	Ød2	L	F	E	Ød1	ØD	B	呼 び NOMINAL SIZE	MATERIAL NO.	

REVISED EC NO: J2007-1398 DRAWN BY CHKD BY APPR: NUKITA 2006/11/29 2006/11/29 2006/11/30	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY T. KAIHO	DATE 2002/05/27	TITLE RING TERMINAL				
		10 OVER 30 UNDER	± 0.25	CHECKED BY T. ITO	DATE 2002/05/27					
		30 OVER	± 0.3	APPROVED BY T. YAMAGUCHI	DATE 2002/05/27	MOLEX INCORPORATED				
		ANGULAR	± 3 °	MATERIAL NO.						
	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-50240-002			1 OF 1	
A			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						