

# Power Choke

## EPZ3030E

- Bobbin : UL 94V-0 Recognized Materials •
- UL 1446 Class B Insulation System •
- Meets or exceeds VDE, IEC, UL & CSA Specifications •  
for Creepage, Clearance and Dielectric Strength
  - Power Rating : 0.75 Amp •
  - High Voltage Isolation •
- Operating Temperature Range -40°C to 85°C •

### Primary Specification


Inductance (mH Min.)	DCR ( $\Omega$ Max.)	
@ 10 KHz, 0.1 Vrms		
34	1.3	1.3
Pins 2-5, 11-8	Pins 2-5	Pins 11-8

Current Rating (Amp)	Isolation (Vrms)	Temperature Rise C° (Max.)	SRF (KHz Min.)
	Between Wdg's		
0.75	3750	33°	100


**Note :**

1. Core EE34/14/9 Size
2. All other pins are omitted

### Schematic



### Package

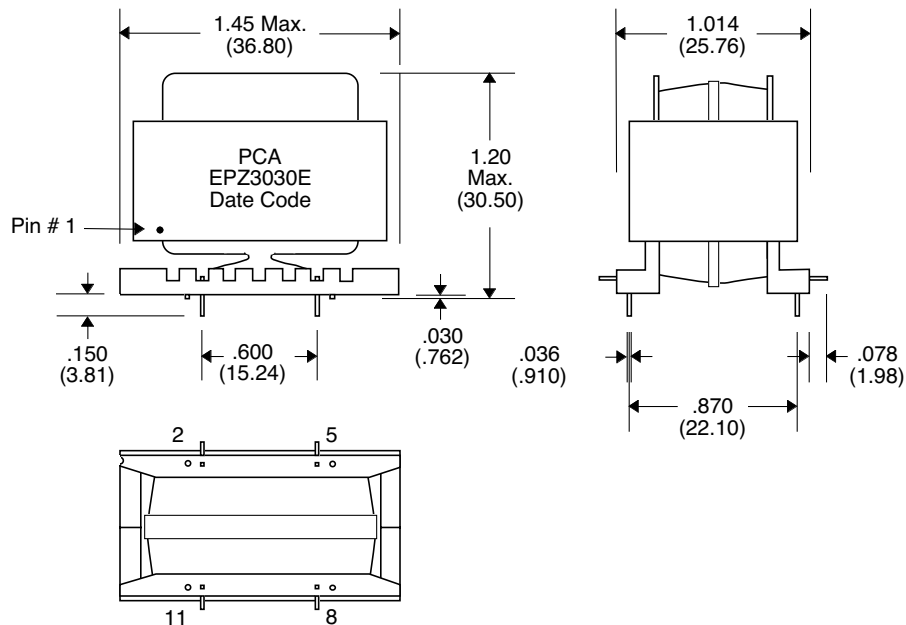

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 / .25