




Features

- ✦ For surface mounted application
- ✦ Low-Profile Package
- ✦ Ideal for automated pick & place
- ✦ Low power loss, high efficiency
- ✦ High current capability, low VF
- ✦ High surge current capability
- ✦ Plastic material used carriers Underwriters Laboratory Classification 94V-0
- ✦ Epitaxial construction
- ✦ High temperature soldering: 260°C / 10 seconds at terminals

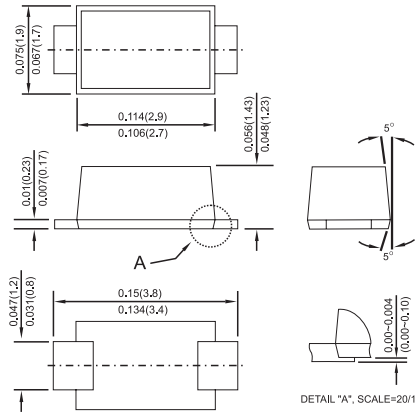

Mechanical Data

- ✦ Cases: Sub SMA plastic case
- ✦ Terminal : Pure tin plated, lead free.
- ✦ Polarity: Color band denotes cathode end
- ✦ Packaging: 12mm tape per EIA STD RS-481
- ✦ Weight approx. 15mg

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, de-rate current by 20%

Type Number	Symbol	SS 22L	SS 23L	SS 24L	SS 25L	SS 26L	SS 29L	SS 210L	SS 215L	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	90	100	150	V
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	63	70	105	V
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	90	100	150	V
Marking Code (Note 4)		22LYM	23LYM	24LYM	25LYM	26LYM	29LYM	20LYM	2ALYM	
Maximum Average Forward Rectified Current at T_J (See Fig. 1)	$I_{(AV)}$	2.0								A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	50								A
Maximum Instantaneous Forward Voltage (Note 1) @ 2.0A	V_F	0.5		0.70		0.85		0.95		V
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=125^\circ\text{C}$	I_R	0.4				0.1				mA
		15		10		5				mA
Typical Junction Capacitance (Note 3)	C_j	130								pF
Typical Thermal Resistance (Note 2)	$R_{\theta JL}$	17								°C/W
	$R_{\theta JA}$	75								
Operating Temperature Range	T_J	-65 to +125				-65 to +150				°C
Storage Temperature Range	T_{STG}	-65 to +150								°C

- Notes:
1. Pulse Test with PW=300 usec, 1% Duty Cycle
 2. Measured on P.C.Board with 0.27" x 0.27"(7.0mm x 7.0mm) Copper Pad Areas.
 3. Measured at 1 MHz and Applied Reverse Voltage of 4.0V D.C.
 4. 22LYM: 2=2A, 2=20V, L-Low Profile, Y-Year Code, M-Month Code.

RATINGS AND CHARACTERISTIC CURVES (SS22L THRU SS215L)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

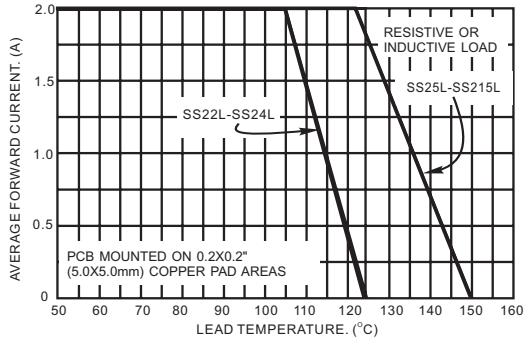


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

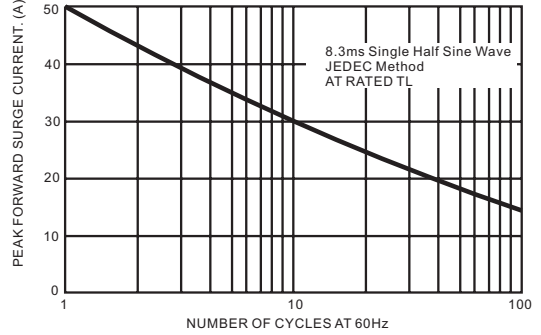


FIG.3- TYPICAL FORWARD CHARACTERISTICS

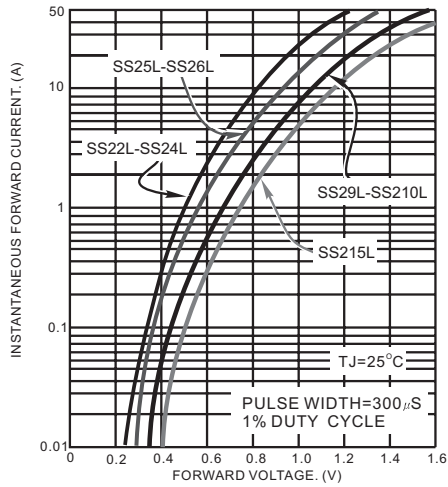


FIG.4- TYPICAL REVERSE CHARACTERISTICS

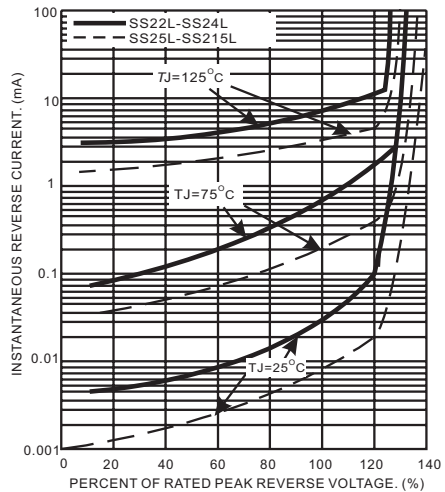


FIG.5- TYPICAL JUNCTION CAPACITANCE

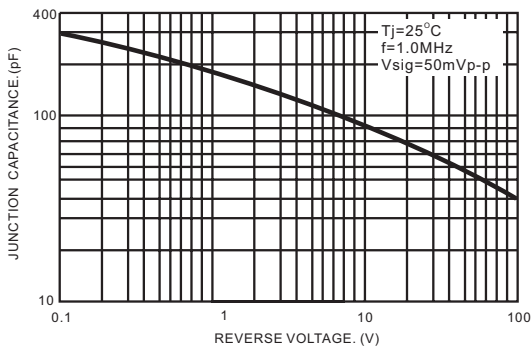


FIG.6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS

